# SCIENTIFIC AMERICAN

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE. MECHANICS, CHEMISTRY, AND MANUFACTURES.

Vol. XXVI.—No. 26. [NEW SERIES.] NEW YORK, JUNE 22, 1872. $3 per Annum. [IN ADVANCE.]


## Air Spring Printing Press.

The old maxim, that "time is money," has never been better exemplified, perhaps, than in the multitude of efforts that have been made, in a variety of devices, to increase the speed of the flat bed cylinder printing press. To achieve this desideratum, it is of the greatest importance that the best system of resistance be employed to overcome the momentum of the bed of the press when in rapid motion. Wire springs have been tried but were found wanting, although for many years they have been employed almost exclusively.

Compressed air, however, has been for a long time universally acknowledged to be the best spring for that purpose, and it is our province here to show some important improvements which have lately been made in its construction.

The air spring heretofore in use was made with a solid or non-yielding plunger which caused much inconvenience and not infrequent damage, by carrying into the air chamber any sheet, tape, etc., that might accidentally have dropped on it. This was attended by the instant stoppage of the press, and vexatious delay and difficulty were incurred in forcing the plunger and its incumbrance from the air chamber; sometimes fracture of the bed and destruction of gearing took place. With the old wire spring, if enough pressure were exerted by it to properly overcome the momentum of the bed, it would be impossible to help it over the centers by hand and start the press; we may therefore infer that the resistance actually offered by it was never sufficient for the requirements of the press. In running at different speeds, the spring should be regulated to accord with them, which, in the old springs, could not be done with any certainty; and while the press is at rest, it is desirable that the spring should be inoperative, as without springs there are no centers. It now remains to describe the improvements and see how they meet the case presented.

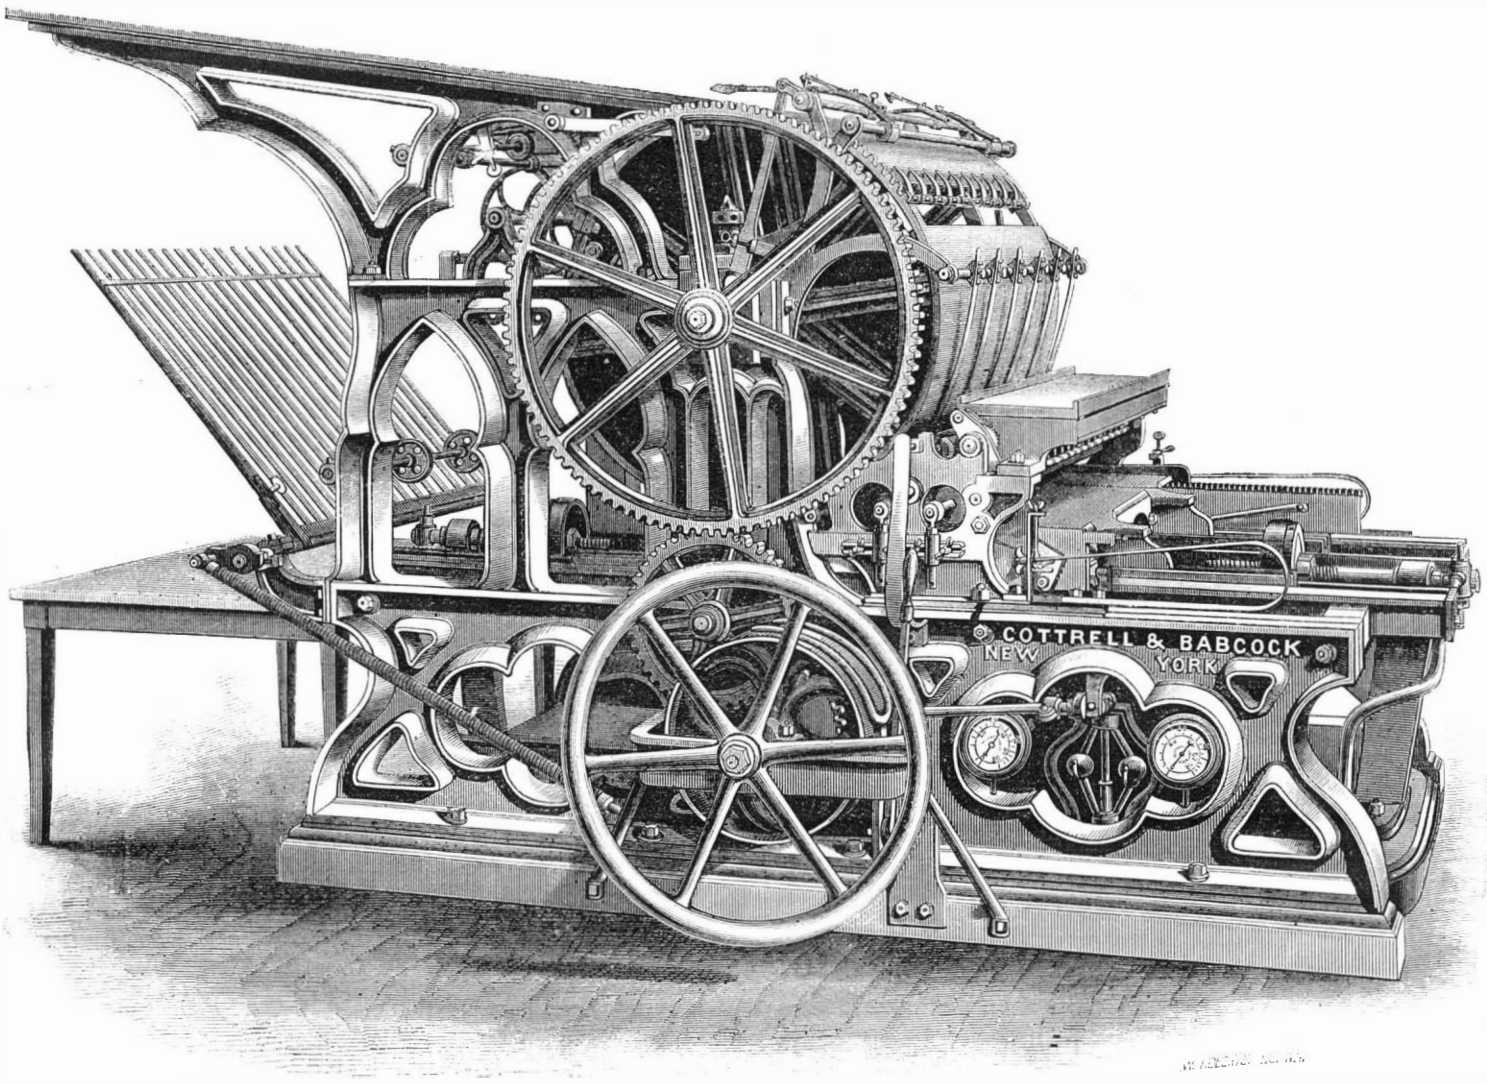


COTTRELL & BABCOCK'S AIR SPRING PRINTING PRESS.

The accompanying engraving (Fig. 1) represents a press supplied with the improved spring. The bed is provided with two cylinders to engage with the plungers seen at the ends of the frame, and the hollow rods of these plungers are connected by a pipe running along the lower part of the frame; which pipe is opened or closed by the valve of the governor shown through the opening in the framework.

Fig. 3

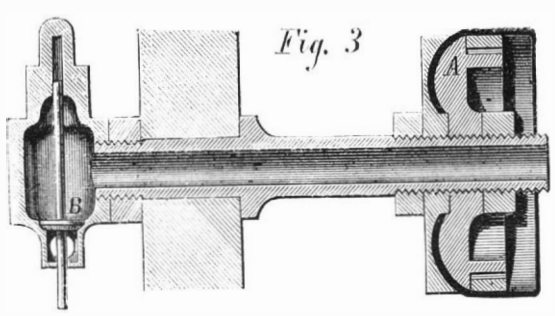


Fig. 2



Fig. 2 represents a cross section of the plunger, A, which, it will be seen from the engraving, is arranged with springs so as to allow the outside packing to contract and expand; it thereby obviates, the inventor says, all difficulty arising from paper, tapes, or other matter falling on the plunger while the press is in motion. Fig. 3 shows a longitudinal section of the plunger, A, its hollow rod, and an automatic valve, B, at its extremity. This valve rises on the return motion of the bed and prevents a vacuum forming in the cylinder, whereby all strain or drag is prevented and power saved.

Fig. 4 represents the governor attached to the connecting pipe, with the plug valve, C, which it operates, and two spring gages to indicate the amount of condensation in the cylinders. The valve is shut by the motion of the press when running at speed, and is, of course, open when the press is at rest. This enables the press to be started at any point without helping it over the centers by hand. The spring gages perform an important function. As they indicate the pressure in the air cylinders, and as this is determined by setting the plungers backward or forward on their rods, there is no difficulty whatever in exactly adjusting the amount of spring to the speed of the press. Every press is furnished with a table showing the gage pressures, indicating the amount of spring required for the different speeds run. All the workman has to do is to adjust the plungers until the gages indicate the pressure laid down in the table.

As compared with the wire spring, it is stated, this spring admits of the press being run quite 25 per cent faster, and without the wear, consequent on the strain caused by the wire spring, and the accompanying jar and noise.

Patents were obtained through the Scientific American Patent Agency, May 2, October 17, and December 12, 1871, for the inventor, Mr. C. B. Cottrell, of No. 8, Spruce street, New York city. Further information may be obtained of Messrs. Cottrell & Babcock, at the above address, by whom the improved press is extensively manufactured.

## NOVEL MODE OF SAWING WOOD WITHOUT A SAW.

The dominion so long held unquestioned by ax and saw has been at length invaded. Electricity has been pressed into the service and threatens to drive these implements into banishment, while the muscular and other forces which were so largely expended in their use are replaced by the action of the galvanic battery in one of its most simple forms.

The invention we are about to describe, and which was patented through the Scientific American Patent Agency, on the 28th of last May, is that of George Robinson, M. D., of this city.

That gentleman was well aware that a galvanic current in sufficient quantity, when passed over fine platinum wire, would raise its temperature to a red or even white heat. The most important application of the principle had previously lain in the employment of the heated wire in certain surgical operations as a substitute for the knife or red hot iron. It was found that the red hot wire easily cut or rather burnt its way, through the living flesh, and tumors of considerable size were thus removed from the human body. The inventor's attention

Fig. 4

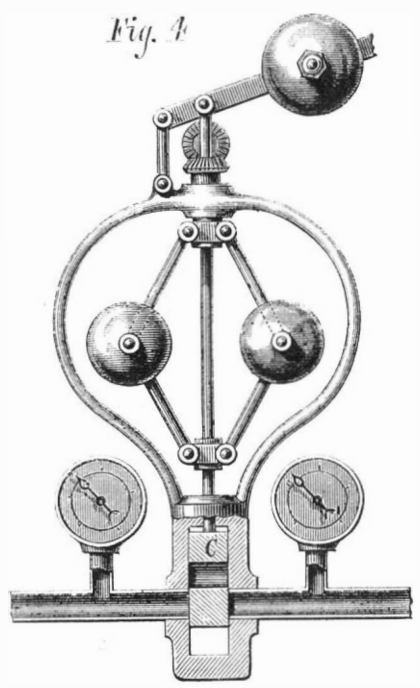


being fixed on the fact that sodden, wet flesh was cut through in this way, a little reflection satisfied him that the division of wood, a comparatively dry substance even when green, could be more readily effected by the electrically heated wire.

© 1872 SCIENTIFIC AMERICAN, INC

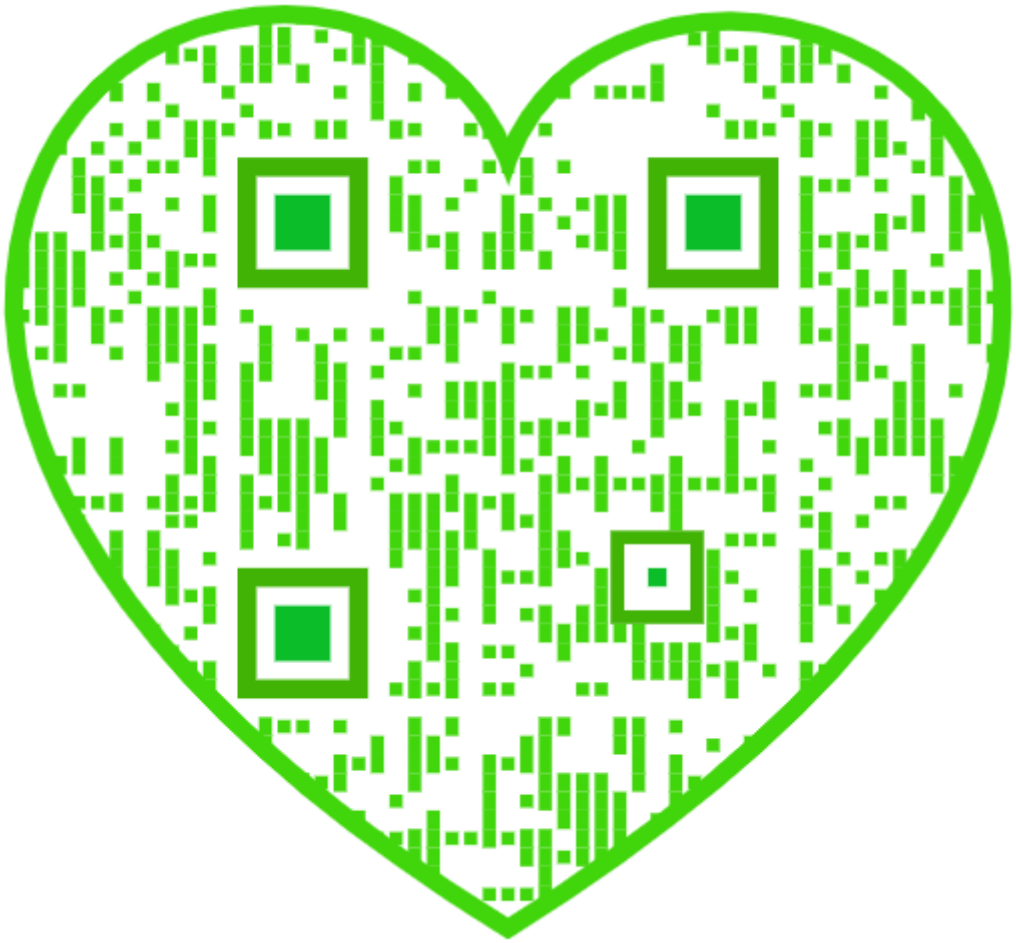

This proved to be the case, and on gently pressing pieces of wood against the red hot platinum wire, especially when aided by a slight sawing movement, the wood was divided in any required direction as by a handsaw, and, of course, without any effort of skill or appreciable expenditure of muscular power. By arranging the wire with handles or other means, so as to guide it readily, the lumber, whether in trees, logs, or planks may be cut easily as desired. There is here, therefore, a simple and easily applied force, which, in a child's hands, may be employed to fell trees, divide them into logs, and, in short, perform all the operations of the saw and the ax. The surface of the wood where thus divided is, of course, slightly charred, but the black layer is very thin, and for many purposes not disadvantageous, as it is known to preserve timber. The battery employed need only be of the simplest character, as quantity, and not intensity, of current is required.

## THE KAOLIN OF THE UNITED STATES.

Dr. Lewis Feuchtwanger recently read, before the Polytechnic branch of the American Institute, a paper on this subject, from which we take the following:

The china clay, commonly called kaolin, occurs in very large deposits in the United States, particularly in South Carolina and Georgia, and its production offers remunerative results for the manufacturers of porcelain, manufacturers of paper and paper hangings, earthen and Rockingham ware, paint manufacturers, frame makers, molders, and many other artisans. The paper clay has been mined in South Carolina for a number of years, and brought to this market, where it always finds ready sale. More than 3,000 tuns have been landed here during this year, and 10,000 more are already engaged to be delivered for the extensive branches just mentioned. But there are many more deposits in that State capable of producing a million of tuns with the most simple *modus operandi*, consisting of cutting or digging the white clay, which is either directly exposed on the surface or within a few feet of the alluvial soil, drying the lumps by exposure to the sun for one or two days, packing into tierces holding about half a tun, and delivering it to the railroad within a mile of the pit. The range of the sand hills in the above States, which contain those extensive clay deposits, is, in a geological point of view, of great importance, for they are all usually found adjacent to the rivers, and more developed near the larger streams than the smaller ones; the sand hills appear to be accumulations of sand, produced by aqueous agency, during the period when the lower boundary of the primitive region constituted an ancient sea beach. The clay strata of various thicknesses are generally considered, by geologists, as the results of decomposition of the felspathic rocks, or of felspar, forming a component part of the granitic and gneissoid rocks of the azoic period during their alteration in the cenozoic time by means of Plutonic agency; while the sand hill formations arising from the decomposition of the tertiary and post tertiary rocks, and including the pleocine, miocene, and eocene formation, took place under Neptunic auspices, as the specimens exhibited, gathered in the sand hill regions, clearly prove. The granite is known everywhere to underlie the marl and clay beds, and we find the same phenomena over an extent of 1,500 miles, beginning in Vermont, crossing over to New York, forming large deposits in New Jersey, Pennsylvania, Delaware, Maryland, Virginia, North and South Carolina, and Georgia. Further, while examining, in Alabama, the triassic rocks of the cretaceous period, we are fully convinced that the great supply of organic remains, the mineral composition and its interposition, prove their true position to be in the geological periods just mentioned.

It is a very remarkable fact that the white clay deposits are mostly found near the surface of the earth. But still more remarkable is the existence of those large clay deposits, so perfectly free from foreign admixture, and even of remains of the felspar from which it originated. Analysis of an orthoclase shows a composition of 63 silica, 17 alumina, 3 soda, 9 potash, and 1 water, while albite and oligoclase have about the same composition, with certain differences in the bases. None of the felspar contains over one per cent of water, while the analysis of the white clay from South Carolina shows the presence of 12 per cent water, and not a trace of potash or soda, and only 2 per cent lime and magnesia, and the silica and alumina in about equal proportion, namely, 44 per cent silica and 39 per cent alumina. In its physical character, the alteration is just as remarkable. Neither mica nor quartz can be detected by the eye or the touch. New Jersey clays and the English china clay have the same peculiarity, as proved by their analysis, and a grave question arises how this metamorphosis took place, and where have the alkalies of the pre-existing felspar gone, and how have they disappeared and been replaced by water? In looking among the elements for an agency, we find carbonic acid the only element that could have produced this metamorphosis: but we are puzzled to know by what process and at what period of decomposition such a change has taken place.

The white clay of South Carolina appears to be fully equal in quality to the famous English china clay, which is largely imported from Cornwall, England, and so extensively used in the arts. But there it is not found in such large masses as in South Carolina, where the writer examined a number of deposits of acres in extent, and from five to ten feet in depth. Since one yard square yields 300 cwts. of the fine and pure clay, the supply is inexhaustible. The peculiar appearance of a thin crust covering the sand hills is, to the observer, of great interest; for it gives undeniable proof that the transformation of the metamorphic or crystalline rocks, during the azoic period, took place under volcanic auspices, and that the result of the decomposition must have undergone several other alterations before the present condition of the sand and clay was attained.

A ferruginous sandstone, resembling fused masses from a great heat, and assuming thin crusts with fantastical figures, is seen all along the sand hills, just below the alluvial soil, and above the sand and clay hills, and I have seen the same crusts of oxide of iron on the railroad from Washington to Baltimore, lying over the sand strata in that neighborhood.

In Georgia, within the compass of the Blue Ridge, extensive deposits of blue or fire clay, resembling the New Jersey blue clay, are found, which are accompanied by a brown mineral, resembling amber, but properly a brown lignite, which, when freshly broken, has the odor of petroleum; and also accompanied by large quantities of oyster (*gryphea*) shells and other forms.

The burrstone or millstone grit is also found contiguous to the clay beds, or at the sand hills, where I found a large mass of several hundred pounds, composed all of silicious shells within the red sand strata.

A beautiful sandstone with oxide of manganese in black spots, and which is sometimes called leopardite, from its resemblance to the skin of a leopard, is here presented. It is from the Blue Ridge, and may be made into a fine ornamental stone.

The consumption of china clay or white clay is very large and daily increasing; statistics show that during the last six months about 2,000 tuns of English clay have been imported in this port. South Carolina has furnished for the paper makers and stainers in New York, Boston, Philadelphia, and Baltimore 2,000 tuns during the same period. The Trenton (N. J.) potteries consume 20,000 tuns per annum. The Ohio potteries in Liverpool and Cincinnati consume annually over 40,000 tuns. The price of the English clay averages $30 gold per tun, while the American can be had for a little over half that price in currency.

In the following analyses of the English china clay, Stourbridge and German clays, and that from South Carolina, New Jersey, and Missouri, we shall see that the Southern clay is in every respect equal to the Cornwall clay so largely imported into the United States:

| English best white clay, washed. | |
|---|---|
| Silica | 46·32 |
| Alumina | 39·74 |
| Lime | 0·36 |
| Magnesia | 0 44 |
| Protoxide of iron | 0·27 |
| Water | 12 67 |

| South Carolina white clay, unwashed. | |
|---|---|
| Silica | 44·46 |
| Alumina | 39·82 |
| Lime and magnesia | 1·86 |
| Oxide of iron | 0·60 |
| Titanic acid | 0·94 |
| Water | 12·10 |

South Amboy (N. J.) white clay, unwashed.

| | | | |
|---|---|---|---|
| Silica | 43·2) | Water | 14·25 |
| Alumina | 39·71 | Potash, zirconium, and iron | 2·50 |

| English Stourbridge clay for glass pots. | |
|---|---|
| Silica | 65·10 |
| Alumina | 22·22 |
| Potash | 0·18 |
| Lime | 0·14 |
| Magnesia | 0·18 |
| Protoxide of iron | 1·92 |
| Phosphoric acid | ·06 |
| Water | 9 86 |

| German clay for pots. | |
|---|---|
| Silica | 50·20 |
| Alumina | 31·13 |
| Potash | 0·39 |
| Lime | 0·30 |
| Protoxide of iron | ·37 |
| Water | 13·70 |

## Chemical Action of Light.

Professor Roscoe lately delivered the first of four lectures at the Royal Institution on the "Chemical Action of Light." He began by showing how a chemical change in certain gases, liquids, and some few solids will change their colors and their action upon waves of white light. He said that sometimes an approximation or separation of particles may be set up by mechanical means, as in the case of a mixture of chlorate of potash and sulphur, which gives a series of loud snaps when a little of it is struck with a hammer. It is dangerous to detonate this mixture in any but small quantities. Heat also will cause explosions in some cases; for instance, when a flame is applied to a mixture of oxygen and hydrogen gases. In like manner light, in some instances, has the power of promoting the approximation or separation of particles. The effect of light on various bodies is by no means the same, and its action on chemical substances can be mechanically explained by the aid of the law of the conservation of energy—the energy of the interstellar ether is expended in acting upon the substance molecularly changed.

As an example of a chemical change which could be produced by light, he placed a mixture of oxygen and chlorine enclosed in a very thin glass bulb, inside a cylinder of thick glass. The bulb had been filled in the dark, and kept in a dark box until required for the experiment. Then he placed a glass trough full of water behind the cylinder, and burnt some magnesium on the other side of the glass trough so that the rays of light had to pass through the water to get at the bulb. The light caused the mixed gases in the bulb to explode; it was not the heat of the flame which caused the explosion, because the water sifted out all the heat rays, with exception of the very small proportion contained in the visible rays from luminous sources. He said that green light will very slowly decompose a mixture of chlorine and hydrogen; the power of decomposition increases as the violet end of the spectrum is approached. Strangely enough, there are two points of maximum action in the chemical part of the spectrum, and between these two points the says have less chemical action on the mixture.

Professor Roscoe next told how the action of light upon salts of silver gave rise to the beautiful and wonderful phenomena of photography. Although this chemical action of light was noticed as early as the sixteenth century, it was not until 1777 that the Swedish chemist, Scheele, explained the philosophy of it, and pointed out that the hydrochloric acid was set free, leaving a black deposit of finely divided silver; he first proved that the action took place in the blue and not in the red portion of the solar spectrum. The lecturer then proved by experiment that chloride of silver was blackened by the blue and not by the red rays.

He said that the decomposition of carbonic acid under the influence of sunlight, by the green coloring matter of leaves, was another example of the chemical changes sometimes produced by light. The earliest experiments on this subject were made by Priestley in 1790. This acute reasoner proved by experiment that it was only in the presence of sunlight that the evolution of oxygen from plants takes place. He took a large inverted vessel full of water charged with carbonic acid and placed a living plant inside; then, in the presence of sunlight, bubbles began to form on the leaves of the plant, then to rise to the top of the vessel. On examination the gas thus produced was found to be pure oxygen. Priestley took a candle and burnt it in a closed volume of air under a bell-jar, until the candle went out after consuming most of the oxygen and liberating carbonic acid. He next placed a fragment of a growing plant in the jar and exposed it to sunlight; in course of time the air was rendered pure again, so that another candle could be burnt in it, and the experiment repeated over and over again an indefinite number of times. Professor Roscoe proved this by showing that a taper would burn brightly in a glass jar containing growing musk, though when the musk was first put in the jar, the air had been made so impure by the burning of a candle in the glass vessel that it would not then support combustion. Priestly tried many of his experiments with mint, and not a few of them with other vegetables; he found spinach to be most effectual in restoring oxygen to air under the influence of light.

The existence of the ultra red rays of the spectrum was first demonstrated by Herschel in 1800. The existence of ultra-violet rays was demonstrated later still by Wollaston and others. It was discovered that chloride of silver became blackened beyond the range of the visible rays of the spectrum. It was found that the lines of the chemical part of the spectrum could be photographed, and that the photographs of them, taken by Rutherfurd of New York, agree with the drawings of them made by hand by Kirchoff, although in a few cases they do not agree in breadth and in intensity. The chemical rays of the spectrum differ from each other solely in wave length and amplitude of vibration.

## $10,000 Reward for Improved Railway Signals.

An offer of the above amount is made by parties in Boston for the invention of devices that some of our ingenious readers can certainly supply. The offer is as follows:

*To the Editors of the Boston Daily Advertiser:*

There are in the United States several millions of persons, sick and well, living along the lines of the various railroads and near manufacturing establishments in populous towns, who are disturbed day and night by the discordant shrieks of the modern steam whistle. Owing to the gradual introduction of this apparatus, the public has learned to tolerate it, but we venture to assert that if it could have been introduced suddenly as we hear it to day, no community would have consented to its use. These unearthly sounds are made in manufactories at early dawn, at noon and at night, to call their operatives to work and to meals, and on the railroads to warn passengers on the highways, and to give notice to switch tenders on the approach of trains. It is not necessary to describe them, since they are familiar to all, and all are more or less affected by them. Is there no remedy for this increasing evil, or cannot a substitute be found which will answer all the purposes of the steam whistle, without annoyance to the public, and with safety to travellers on the railroad and on the highway? Believing that such a substitute can be found, and to encourage experiments in that direction, we hereby agree to pay the sum of ten thousand dollars to any one who shall, within two years from January 1' 1873, invent a system of signals which shall supplant the use of steam whistles on railroads, and which shall be pronounced by judges, hereinafter named, to be free from the evils of the present system, and which shall be attended with no discomfort to passengers on the trains, or the highways, or to residents along the line of the railroads. One fifth of the amount thus pledged shall be paid to the author of such invention at any time within the period specified, whenever its claims shall be substantiated by the said judges, and the balance whenever the invention shall be adopted and used by a majority of the railroad companies in New England, provided such adoption be previous to January 1, 1877. The judges in these premises shall be the Chairman of the Massachusetts board of railroad commissioners, the President of the Boston and Albany and Boston and Maine railroad corporations, the Professor of civil engineering in the Massachusetts Institute of Technology, and the chief locomotive engineer on the Boston and Albany railroad. If any of the above named gentlemen shall decline to serve as judges, the donors reserve to themselves the right of naming substitutes.

Communications may be addressed to "Committee on Railroad Improvements," care of *Boston Daily Advertiser*, Boston, Mass.

## The Brewing Interests of the United States.

The twelfth annual convention of the chief association of the brewers of the United States was recently held in this city. From the opening speech of the President, Mr. Henry Clausen, we learn that there are at present three thousand breweries in the country, employing a capital of over one hundred million dollars and giving employment to thousands of people. The trade yearly consumes twenty-three million bushels of barley and over eighteen million pounds of hops. The revenue derived by the United States from this industry amounted in 1871 to seven millions eight hundred thousand dollars, being an increase of over six million dollars since 1863.

© 1872 SCIENTIFIC AMERICAN, INC

## PORTABLE FRESCOES.

The process of frescoing in oils, invented by Mr. Charles T. Kemmer, is a novelty in its way, and, we think, is likely to entirely supersede the ordinary mode of frescoing. It is designed to do away with the expense and inconvenience always attendant on the usual processes, and, at the same time, to furnish artistic decorations of a most superior quality and durability.

We may describe the process briefly, as follows: Ordinary sheeting is dipped in soap and water and stretched upon a frame; it is afterward covered with a coating of gelatinous size, and allowed to dry. An oil painting of the nature required is then executed on the prepared sheet, and, after it is thoroughly dried, the gelatinous sizing between it and the sheeting is moistened, and the painting removed, bodily, from the sheeting. The painting is then attached to the plaster by a liquid cement of appropriate character.

In the production of the painting, whether it be merely a plain tint, an ornamental design, or a gilded decoration, about five coats of the best linseed oil fresco paint are used. This produces a tough, tangible film, about the thickness of good writing paper, which will bear washing with soap and water and a sponge as often as may be desired. When cemented to the plaster, it adheres with a tenacity entirely unknown where the paints are laid directly on, as in ordinary frescoes, which are liable to peel off. Cracks occurring in the plaster do not affect the film unless they are of large size.

In the manufacture of this portable fresco, plain tints, etc., are turned out in pieces 20 inches wide and 8 yards long, ready for attachment to the plaster. Where a ceiling or wall is to be covered with a decoration specially designed for the purpose and complete in itself, the painting is executed of the size required, and the film is cut into strips of a convenient size for cementing to the plaster: as the strips are cuttings from one piece, they of course match so accurately that no join is discoverable.

Among the advantages belonging to this process are the facility with which frescoes for distant use may be designed and painted, and the very short time which is necessary to fix them on the walls or ceiling after they are done. As an illustration of the latter, we may state that the film can be applied in one day to a ceiling which it would take three weeks to fresco in oil in the regular manner.

Mr. Kemmer has received patents for his invention both in this country and in Europe. Further information may be obtained by addressing Charles T. Kemmer & Co., Passaic avenue, East Newark, N. J., or at No 4 Warren st, New York.

## A Recent Tornado.

Portions of our Western prairie country, by their comparatively level and unobstructed formations, present a fine field for the play of the winds, and for the formation of those remarkable spiral currents known as whirlwinds, from which great damage sometimes results. These spiral currents usually cover a very narrow pathway on the surface of the ground, but they operate with tremendous force, and might not inaptly be termed pneumatic plowshares. One of these aerial giants made its appearance at Quincy, Logan county, Ohio, on the 8th of June.

A sultry day was followed by the appearance of a cloud, in the West at 5 o'clock in the evening, which increased in blackness and size with fearful rapidity. A heavy wind soon set in, and at 5.30 o'clock the whirlwind struck the earth five miles from Quincy, moving in a northwesterly direction. The tornado reached Quincy in about five minutes and passed through the town, making a clean sweep of houses, trees and fences along a path which fortunately was comparatively narrow. In this village 50 or 60 dwellings and stores, two churches, and as many more shops, stables and outbuildings were unroofed, rocked from their foundations and demolished. The air was literally filled with flying weatherboards furniture, laths and plaster. A parlor stove was caught up by the wind and hurled through the air until it fell upon a woman and crushed her so that she died. The Baptist and Methodist Episcopal churches were completely destroyed.

The tornado on its way to De Graff struck Bogg's flouring mill, five stories high, and containing 3,000 bushels of grain. The building was moved nine inches upon its foundation, and the roof and the portion of the fifth story were carried away. The storm plowed its way through De Graff, carrying destruction in its path, but injuring fortunately fewer persons and a smaller number of buildings. After leaving De Graff it passed several settlements, and finally rose from the earth and was seen for miles, carrying in its funnel shaped form timber, rails, and *débris* which it had gathered in its destructive march. The newspapers give the names of some fifty persons killed and wounded by this tornado.

## Car Starter.

William M. Stratton and William E. Stratton, of West Troy, N. Y, have recently patented an improvement in apparatus for storing up, in a spring or springs, the power expended in arresting the motion of a car, to be used in setting it in motion again; and it consists in having the drum, which is employed to wind the tension cord of the spring, made with such devices and arranged in such manner that it may be locked and held after being detached from the gearing connected with the axle to wind it up, so that the car may be allowed to run awhile before the power of the spring is applied; thus making the apparatus capable of retaining the power stored up in the spring while the car is going down a descending grade and using it on an ascending grade, the car running free between the grades. The invention also consists in certain novel devices, for thus detaching, holding, and locking the winding drum.

## CINCINNATI EXPOSITION.

The commissioners announce in our advertising columns that the third National Industrial Exposition will be opened in Cincinnati, September 4th, next. It will remain open until October 5th, following.

The aid which such exhibitions afford to business and the advancement of knowledge is of the most important character, and fully entitles them to the interest of tho whole nation.

We would wish to remind intended exhibitors that they are recommended to make immediate applications for space.

Extensive arrangements have been made for the transportation of visitors, at reduced fare, and it is expected that the large attendance of last year will be very much increased this season.

## THE UNIT MEASURE OF ELECTRICAL RESISTANCE.

Since the electric telegraph has been in existence, quite a number of different units of electrical resistance have been proposed, but at the present time nearly all of these units have been adjusted to one standard, so that one of them may now be considered the basis of all.

Professor Wheatstone proposed, as a unit, one foot of copper wire weighing one hundred grains.

Professor Jacobi proposed a copper wire one meter long and one millimeter in diameter.

Professor Matthiesen proposed a copper wire one statute mile in length and one sixteenth of an inch in diameter.

Mr. G. F. Varley's unit is a mile of special copper wire one sixteenth of an inch in diameter.

Dr. Werner Siemens employed a glass tube filled with pure mercury. This tube was one meter in length and contained a column of mercury having a transverse section of one square millimeter.

The German, French, and Swiss telegraphers used a certain length of their standard sized iron wire, such as was used for the construction of overland telegraph lines, as a practical unit of measurement.

The British Association proposed and adopted a theoretical unit of resistance, in which a certain amount of work or mechanical effect is produced by a given amount of electricity in a given length of time, and this theoretical resistance is copied or represented by a certain length of wire.

This unit is beautiful in theory, but difficult and uncertain in practice. The principal source of difficulty lies in the accurate measurement of the mechanical effect of the electric current. Since this unit has been adopted by the British Association, some of the most expert continental physicists have, by experiment, arrived at the conclusion that it is about two per cent smaller than the copies distributed by the association.

The objection to the employment of copper wire of various sizes as a standard arises from the fact that no two specimens of copper, or of any other metal, possess precisely the same specific conducting power, and, therefore, measures of resistance thus defined are liable to vary, and, in fact, do differ from each other very materially.

This objection, however, says the *Telegrapher*, does not apply to mercury, which, in consequence of its fluid nature, is easily rendered chemically pure. In fact, experience has shown that resistances can be produced and reproduced by means of mercury, which do not vary among themselves more than two or three ten thousandths of a unit, or about as near as the finest set of silversmith's scales can be made to balance and weigh alike.

In deciding upon a standard of measurement, the first and most important consideration is to select one which is least likely to undergo change or variation, so that, when they become multiplied and brought into general use, one of them will always correctly represent another.

If we suppose, for example, that a person should undertake to construct a two foot rule: He first selects a standard as nearly correct as possible, and copies it with great care. Suppose he then destroys the first and makes a third from the second, and a fourth from the third, and so on until he has made a thousand, and all of his measures, except the last one made, have been destroyed.

Now, we will suppose that another person commenced making two foot rules in the same manner, and using the same original standard to copy his measures from, and in the same way copied one from another to the number of a thousand. If these two persons compared their final measures with each other, it is more than probable there would be a considerable difference—that is, they would not agree one with the other. In view of this disagreement, how could it be decided which was the most correct, as the original standard is no longer in existence? In some such condition would two persons be, each having British Association units of measurement. They cannot get at the original unit, because it never had a practical existence.

The mercury unit, on the other hand, has for its basis the meter measure, which is defined as the ten millionth part of the distance of the pole of the earth from its equator, and very nearly the length of a pendulum that beats seconds.

The British Association unit forms part of a system. The resistance bears the same relation to the other conditions that distance does in the definition of a horse power. A horse power is that force which will raise 33,000 pounds one foot in one minute. Similarly, a British Association unit is the resistance of the circuit producing a defined mechanical effect or work in a certain time, with the other conditions of quantity and intensity defined as units. As before stated, the great difficulty lies in the correct measurement of this mechanical effect. In order to accomplish this, the British Association made use of a magnetic needle, that is, a magnet held in its position by the magnetism of the earth, which is never in itself constant, and is at all times in a state of perturbation. It results from this that the force required to move this magnet equally, at different times, will not be the same. In addition to this, the magnet is affected by local causes, and in no two different localities can it be said to be affected precisely alike. From these and other reasons, German scientists of the highest rank, as the result of their investigations, have announced that the British Association unit, as distributed by their committee, does not approximate its true value within nearly two per cent.

It was after careful consideration of the defects in the different standards of electrical resistance, and with the desire to adopt the one which was least liable to objection, that the International Convention of Electricians, at Vienna in 1868, adopted the mercury unit as a standard, and all the European countries, with the exception of Great Britain, have adjusted their resistance scales to it. Mr. Varley has defined his unit, or "readjusted it to 25 mercury units."

Mr. Latimer Clark defines the B. A. unit, or Ohm, as "the resistance of a prism of pure mercury one square millimeter in section and 1·0486 meters in length at 0° centigrade," so that, in reality, the mercury unit is now the basis or standard of all the measures in use.

The average resistance of a statute mile of good No. 9 galvanized wire, such as is generally used in this country, is about 20 mercury units.

## Masonry and Brickwork.

However gigantic may be the strides with which engineering science has advanced during the last few years, it cannot be denied that, so far as regards the special art of building in masonry or brickwork, the present race of architects and engineers are feeble in conception, timid in execution, and but dwarfs of utter insignificance as compared with the giants of former days.

It would be amusing, or more truly perhaps the reverse, to note in what manner an average architect or engineer of the present age would deal with some of the problems presented to the old masters: for instance, such a one as that successfully solved by the Saracenic builder of the justly celebrated tomb of Mahomet at Beejapore, India, which was as follows: Given a building 135 feet square on plan, and 110 feet high, required to cover the same with a circular dome 124 feet in diameter, and weighing some twelve or fourteen thousand tuns. It would be curious to observe how many hundreds of tuns of iron our men would consider it imperative to throw into the work. The Saracen, knowing the capabilities of his material, asked for no ironwork, but fearlessly trusted to his masonry, and skillfully corbelled out the square walls at the top to meet and support the circular dome, and to such a bold extent that, at the angles of the building, the projection of the corbelling measured no less than 46 feet.

How infantile appear the greatest exertions of our modern building in comparison with such mammoth works as these. The traditions of the art have been lost, and science has provided no substitute. Our professors, if they do not avoid the subject altogether, treat it in a perfunctory, *ignotum per ignotius*, manner, which only serves to make the "darkness more visible," or the "little glooming light"—which may already exist in the student's mind—"more like a shade." We may be taught, for instance, that the line of pressure in an arch must be included in the middle third of its depth, or the arch will tumble down, and we may be treated to many other equally shallow *dicta* based upon hypotheses evolved from purely theoretical considerations, which the bare existence of hundreds of buildings for hundreds of years conclusively demonstrates to be utterly false and untenable.

In recent times, no doubt, the introduction of iron work has had much to do with the extinction or suppression of nearly all that is true and expressive in the art of building. It is so very easy to multiply the span and divide by the depth, and to perform the other elementary operations incidental to the determination of the strength of an iron girder; and then, besides, the figures and diagrams look so clever as to induce, in the too often shallow performer, a glow of self complacency, leading him to fervently believe that an engineering feat has really been achieved. But if such work constituted engineering, the schoolmaster in the "Deserted Village" would be an admirable exponent of the science:

> The village all confessed how much he knew;
> 'Twas certain he could write, and cipher too.

Another advantage offered by ironwork as compared with masonry, and one to indolent or incompetent men peculiarly seductive—is that of shirking responsibility. With iron girders, the designer may devote the few minutes necessary to the conventional calculations, specify iron of a given strength, and so rid himself lightly of any further sense of being responsible. But if, on the other hand, his first consideration is his client's interest, and not his own ease, he will often be led to discard ironwork in favor of masonry, and he will find no royal road to learning in that direction, but must honestly and laboriously qualify himself, by theoretical and practical investigation and by comprehensive analyses of works already executed, to form a correct estimate of the capabilities of the masonry or brickwork with which he may dealing, and to shape his design accordingly —*Engineering.*

OZONE IN THE AGEING OF ALCOHOLIC DRINKS.—On running out wine drop by drop through a vessel filled with ozone, the essential oils and other substances which give the wine a "new" flavor are destroyed, and the wine much improved in quality.—*M. Loew.*

© 1872 SCIENTIFIC AMERICAN, INC

## NEW MAGNETO-ELECTRIC MACHINE.

In all the magneto-electric machines hitherto constructed, only an approximation to a continuous current has been arrived at, and that either by making each machine a compound one, having several armatures arranged so that, when the current ceased in one, it was taken up by the next, and so on, or, in other machines, by driving the armature or armatures at a very high velocity, so that the interval between the cessation of one current and the commencement of the next became inappreciable.

In M. Gramme's machine, says the *Mechanics' Magazine*, the current, whether the machine be turned slowly or quickly, is continuous. Fig. 1 is a theoretical representation of this machine. It consists of a horseshoe magnet, N S, between the poles of which turns an iron ring with an insulated wire wound round it in one continuous length. The inner bends of the turns of this wire are connected with small studs, *s s s s*, insulated from one another. The edge of the faces of two wheels, *w w'*, press against these studs, as shown, so that as the iron ring with the wire wound around it rotates, three or more of these studs are always in contact with them. In the actual machines, each of the turns, as represented in the engraving, is really a separate coil of several turns of wire, the junctions between the ends of one coil and the next being connected with the studs; and the iron ring is not necessarily one of round iron, but may be, or rather is, a short and very thick soft iron tube, and the permanent magnet a proportionally broad compound one. The action of the machine may be explained as follows: Let us regard the turn of wire just above the line, *b a c*, on the left hand side of the ring. The portion of the iron ring above this turn, that is to say, the portion nearest the pole, N, has the same polarity as that pole, while the portion of the ring below the turn has southern polarity. Now as the ring rotates about *a*, the portion of the ring above the line, *b a c*, becomes more strongly north as it approaches N, and the part below less south as it recedes from S; and, finally, when it arrives at N, the polarity on both sides is the same, which is as much as to say there is no magnetism in it. This change causes a current of electricity to be induced in the wire. As the turn now moves on towards S, the iron in front becomes a south pole, and that behind a north pole, until it arrives at the line, *b a c*, when the difference of polarity is greatest. This change sends another current through the wire, which, as the turn has become turned over in position, will be in the same direction as the former one, or rather will be a continuation of the first current, so that the turn of wire, in changing from *b* to *c*, has a continuous current induced in it, as have in like manner all the turns before and after it. As now the turn moves further still, the magnetism becomes less and less, as at first, and finally, when at S, disappears, and on going still further becomes reversed as before; this causes a current to circulate through it in a reverse direction to the former one, and so also for all the turns before and after it; these currents together pass out through the studs, in contact with the wheel, *w*, and return when the circuit between the two wheels is completed (as they must be of course before any current can flow) through the wheel, *w'*, and thus a continuous current is kept up as long as the wheel is kept rotating. The circuits of the machine are precisely similar to two sets of cells joined up for quantity, that is to say, the last zinc plate of one set is joined to the last zinc of the other set, and also the last coppers are joined, as shown in Fig. 2, each cell representing one turn, or in the actual machine one separate coil.

It will be seen that as each wheel always presses against three or more studs, the coils between these studs are short circuited, and do not add their power to the others. The resistance of the wire in the machine will be the resistance of the length of wire between the stud pressing against the higher part of the wheel, *w*, and the stud pressing against the higher part of the wheel, *w'*, taken parallel with the length of wire between the studs pressing against the lower part of the wheels, which is equivalent to rather less than a quarter of the resistance of all the wire taken in one length. The resistance is not exactly a quarter, because the coils between the studs pressing on the wheels are in short circuit, and do not add their resistance to the other wire. By constructing the coils of thick wire, a current of great quantity can be obtained, or with a larger length of thin wire, one of great intensity. The electro-motive force of the current is directly proportional to the rate of rotation of the coils—that is, when the rotation is not extremely rapid, for the demagnetization of the iron requires a certain time. The machine, from its great simplicity, is likely to have an extended use for such purposes as electrotyping, the electric light, etc.

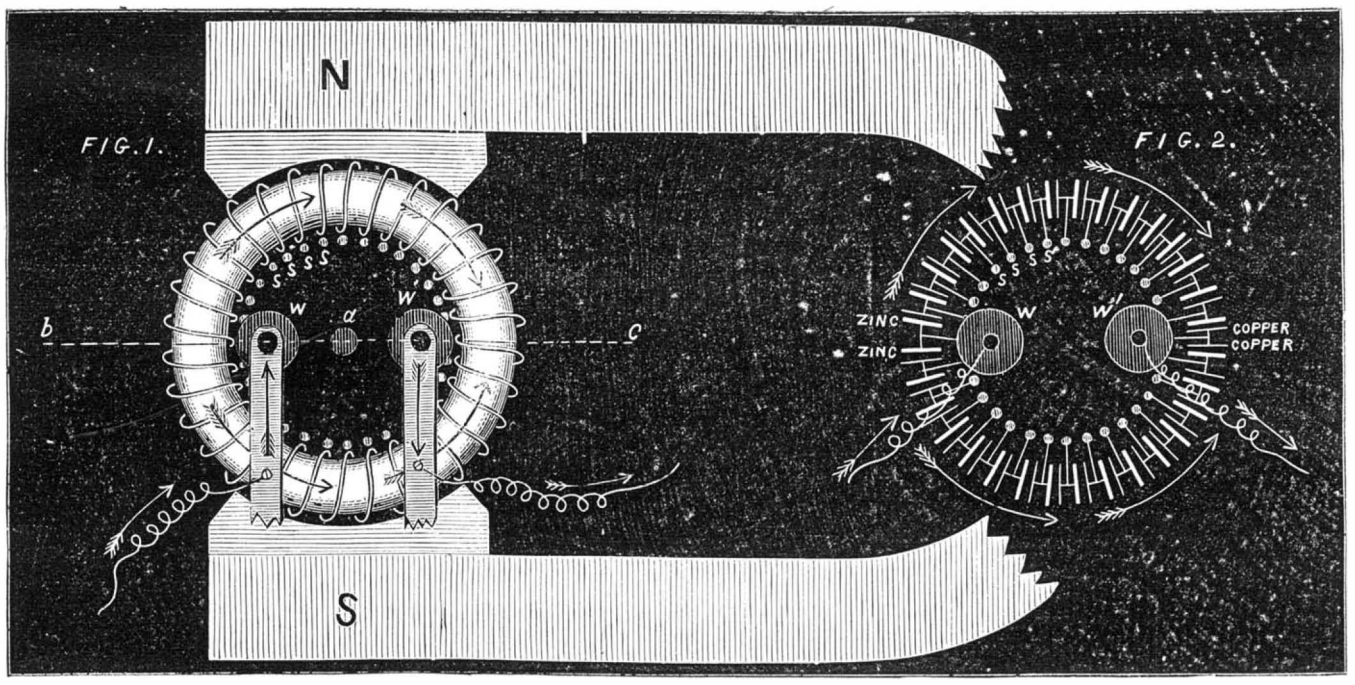


## MAGNETO-ELECTRIC MACHINE.

## Lac Anilines for Staining Paper, Leather, etc.

Springmuhl states that paper has hitherto been stained in two ways: either the material, previous to manufacture, was dyed with a substantive color, or an adjective color was applied to the finished paper. In the former case, a product was obtained colored through and through; in the latter, the color is only on one side. With a compound of resinous matter and aniline colors dissolved in alcohol, the paper can be rapidly colored at once, on both sides, in the most splendid manner and in an infinite variety of shades. The best resin for the purpose is shellac, to which a little sandarach or turpentine may be added. The resinous aniline solution interpenetrates the whole mass of the paper, giving it a completely even color, and a considerable luster. The two alcoholic solutions of color and of resin may, if needful, be kept separate till required for use.

Every kind of paper, sized as well as unsized, can be prepared in the same manner. The process is very simple: the sheets of paper are drawn through the solution placed in a shallow vessel, and afterwards hung up to dry. By wetting one side of the paper, the same result may be produced, if the texture is not too thick. If the paper is thoroughly interpenetrated with color, it becomes, when dry, so compact and dense that one side can be subsequently treated with a different color. By adding a small quantity of an essence, the paper may at the same time be perfumed. Leather, etc., may be treated in the same manner.

## SAFETY KEROSENE LAMP.

Many of the accidents resulting from the use of kerosene arise from the breaking of the glass reservoir when the lamp is overturned by any cause. To obviate this is the intention of the invention we illustrate, and the object appears to be attained by means at once simple and inexpensive.

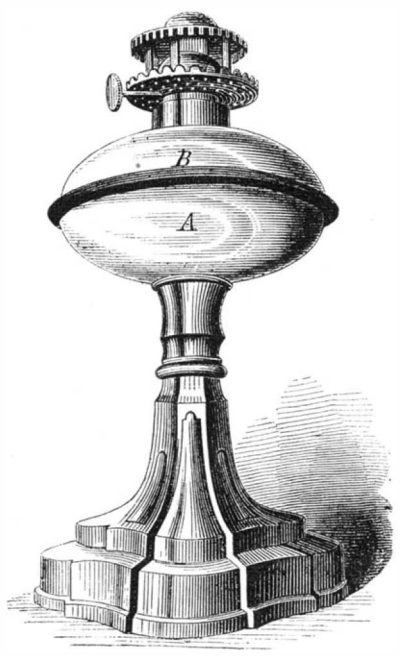


At A is shown the glass reservoir of the lamp, and at B a ring of india rubber which surrounds its largest circumference. A groove is formed in the glass, into which the rubber ring falls far enough to be kept securely in place, while, at the same time, it projects a sufficient distance from the reservoir to form a protective cushion on every side. Upon the lamp being overturned, the india rubber cushion receives the force of the concussion and preserves the glass from injury. We have upset the lamp from which our cut is made a great many times, to test its strength, without effecting any damage whatever.

Patented through the Scientific American Patent Agency, April 16, 1872. Further information can be obtained of the inventor, Mr. Adolph Otto, whose present address is 76 Ann street, New York city.

## PENCIL LEADS.

Graphite, clay, and water are the ingredients of the leads used in the ordinary forms of pencil cases sold by jewelers and stationers. The graphite, or blacklead, as it is commonly termed, that is employed for the purpose is of the finest quality. After being ground to a powder, it is mixed with a peculiar dark blue clay, which is imported from Bavaria, and the whole is kneaded with water until it assumes the consistence of putty.

The apparatus used in the manufacture consists of an iron cylindrical vessel, which is usually of about seven inches in diameter, and constructed of sufficient strength to withstand heavy pressure. In the center of the bottom of this vessel, a small round hole is pierced, and inside the cylinder is a closely fitting movable steel plate which also has an aperture in its center, so that, when it is placed on the bottom of the vessel, the two openings coincide. The hole in the plate, however, is the smaller, being of a diameter equal to that of the leads to be made—so that larger or smaller apertures and, consequently, different plates are required for the various sizes of leads.

Into the above mentioned vessel, after the plate on its bottom is adjusted, the mixture is packed, which, on being forced down by a heavy pressure, is driven out through the hole in long flexible threads. These are received on sheets of metal, and each sheet, as soon as filled, is placed in an oven. The length of time occupied in the baking depends upon whether the leads are to be hard or soft; if the former, they are kept in the oven for some time, if the latter, a short period suffices. This process completed, the threads are broken up into short pieces and arranged according to their sizes. There are nine of these sizes in the trade, numbered from 1 to 9 according to the length of the pieces.

The finished leads are sent to the market packed in little boxes. The latter are either turned from wood or else pressed by dies from thin sheets of tin or brass. Large numbers of them are manufactured at Waterbury, Conn.

Leads at wholesale sell at three dollars per gross. The trade, which is supplied mostly from manufactories in Philadelphia, is, we should judge, of rather limited proportions, as one of the largest dealers in this city informs us that his sales rarely exceed three thousand gross per annum.

SCARLET DYEING ON WOOL AND SILK.—Jegel proposes the following method of dyeing wool and silk scarlet by the simultaneous action of magenta and dinitronaphthol or naphthaline yellow. The less magenta is employed, the better. The method is to heat a dilute aqueous solution of naphthaline yellow to near boiling, add so much magenta as amounts to two per cent of the naphthaline yellow, and then dye. The dye liquor must not be mixed when cold. If this is done, all the magenta is thrown down in an amorphous flocculent state. If this has taken place, the subsequent application of a boiling temperature does not remedy the mischief, since a part only of the magenta thus precipitated is redissolved, the rest melting together into a greenish golden mass. In this state, the liquid is quite unfit for dyeing, and even if filtered gives no good shades.

PREPARATION OF PURE INDIGOTINE BY MEANS OF CARBOLIC ACID.—According to Mehu, carbolic acid, with the aid of heat, has the power of dissolving indigo blue readily. On cooling, the greater portion is deposited in a crystaline state. The cold solution has an intense purple blue color. In order to prevent the carbolic acid from congealing as it cools, a little alcohol may be added, which causes the greater part of the color to be deposited. Instead of alcohol, camphor may be used to the extent of one-fifteenth, or benzine. By using 500 grammes of carbolic acid, we can obtain two grammes of pure indigo blue (indigotin) in crystals which, under the microscope, appear remarkably regular. Mehu employs indigo which has been previously washed, first with water, then with very dilute hydrochloric acid, and then repeatedly extracted with boiling alcohol.

COATING ZINC WITH IRON.—The objects should first be plunged into a hot solution of 160 gms. ferrous sulphate and 90 gms. sal ammoniac in 2,500 c.c. of boiling water. After two minutes' exposure, they should be removed and brushed off in water. This has for its object simply the cleansing of the surface. They are then again placed in the bath and heated, without brushing or washing, until the sal ammoniac fumes are gone, then washed, and this operation repeated three or four times, when a coating of iron will be formed on the zinc, which takes a fine polish under the brush.—*M. Puscher.*

© 1872 SCIENTIFIC AMERICAN, INC

### Miners' Unions in Prussia.

The oldest associations amongst working men for mutual aid, of which modern trades' unions are the youngest offspring, are unquestionably the "Knappschaften," or miners' unions of Germany. They date back more than 600 years and were established wherever German miners migrated; they had written rules and regulations, and generally received corporate rights from the respective sovereigns who wished to encourage mining enterprise within their own dominions, particularly for the sake of winning precious metals. The German miners' unions exist over all Austria, Russia, Norway, and Sweden, where the art of mining was introduced from Germany; and the technical terms, still in use by the profession in these countries, bear witness to their German origin, as well as the general mining laws which regulate the acquisition of mining property from the State and the obligations of mining proprietors towards the sovereign, who holds all mineral treasures under regal rights. In no other country but Prussia, miners' unions or "Knappschafften" have been developed with so much care by legislation for the general benefit of the working miners; and though they are still capable of improvement, they can fairly be pointed out as models which are worthy of imitation for the benefit of the other working classes. The report on the miners' unions in Prussia during the year 1870 has lately been published, and we find in it data which may prove of value to the mining interests of this country, where the improvement of the social condition of a large population of miners is just now being eagerly discussed.

The war of 1870 has not failed deeply to affect the condition of the "Knappschaften," as over 30,000 members were forced by it to leave their peaceful calling and to enter the ranks of the army. The direct object of the miners' associations is to render immediate assistance to its members when they are in need of it, so that, if injured by an accident or if taken sick, they receive assistance during the duration of their illness, besides free medical treatment and medicine. If their case should make it desirable, they are received without cost at one of the unions' infirmaries; and in the event of death, the union furnishes the funeral expenses. If, through any accident or through age, they become too infirm to gain any wages by their work, they receive for life a pension out of the common fund; and according to the degree of their infirmity, they are classed as pensioners, or half pensioners, and obtain help accordingly. If a member leaves a widow and children behind him, the former receives a monthly pension until she dies or marries again, while the children are assisted until they are 14 years old, besides free school to the same age. There are two classes of union members, permanent and temporary, the latter only acquiring personal rights, while the former, after 5 years membership, have their rights extended to all the members of their family; but both classes forfeit their rights when they leave their union without permission, or cease to pay their contribution, which, as a rule, is 3½ per cent of wages earned. The property of the union is thus principally derived from contributions of the members, but also to no small extent from voluntary donations, as well as from contributions of 1 per cent on their incomes, which the mine owners are legally obliged to pay. This fund is under the management of a committee of trustees, "Knappschafts Aelteste," who are freely elected by the members and placed under the control of the Government mining engineer of the district, who is made responsible, to prevent defalcations and to see that members always obtain justice.

On the 1st of January, 1870, the miners' unions comprised 202,562 members, of whom 102,174 were permanent and 100,388 temporary. The number of persons supported by the unions during the year was 45,057, namely, 9.267 pensioners, 277 half pensioners, 13,883 widows, and 21,630 orphans, and school money was paid besides for 45,402 children. The total income of the union was $1,600,000. During the year, medical assistance was rendered to 117,025 persons, sick wages were paid for 1,436,826 days, and 9,486 members received, in all difficult cases, free medical treatment at the hospital. Most of these cases were the results of accidents. —*Engineering.*

FAST RIDING.—At Dexter Park, Chicago, recently, Charles Rettiker, "the California Boy," undertook the feat of riding on horseback 200 miles in twelve consecutive hours, being at an average speed of sixteen and two thirds miles per hour. The track used was the circular one, seven eighths of a mile in length. Fresh horses were used for each round. On the the twenty-fifth round, the horse bolted the track and leaped the rail, falling upon its rider, who, however, not being much hurt, remounted and finished the round. On the 198th round, the race came to a sudden termination, as the horse again jumped the fence and threw his rider with such force that he was obliged to be taken from the park in a carriage, and he now lies in a very low state, although the physician has some hopes of his recovery. He had made 172⅔ miles in nine hours and twenty minutes, and but for the accident would undoubtedly have accomplished the feat.

GALVANIC ACTION ON IRON SHIPS.—It is an alarming fact in practice says the *Engineer*, and one that, being so perfectly in accordance with theory, ought to awaken no surprise, that should even a minute piece of copper come into contact and so remain, with the inside bottom of an iron ship then wetted with bilge water, as under the circumstances of the case, it, necessarily must be, active galvanic energy is established between the two metals, and iron being the sacrificial metal of the couple, the bottom will, sooner or later—and sooner rather than later—be eaten through in a hole somewhat larger than the superimposed copper.

## CRYSTALLIZATION OF SILVER, GOLD, AND OTHER METALS.

BY DR. JOHN HALL GLADSTONE, F.R.S., F.C.S.

There are few chemical experiments so well known as the growth of the lead tree, a specimen of which is on the table, together with a silver tree that is said to have been made by the late Professor Faraday. These carry our minds back to the time of the alchemists, who called the first, *arbor Saturni*, and the second, *arbor Dianæ*; and they may be looked upon as the types of a large number of phenomena, in which

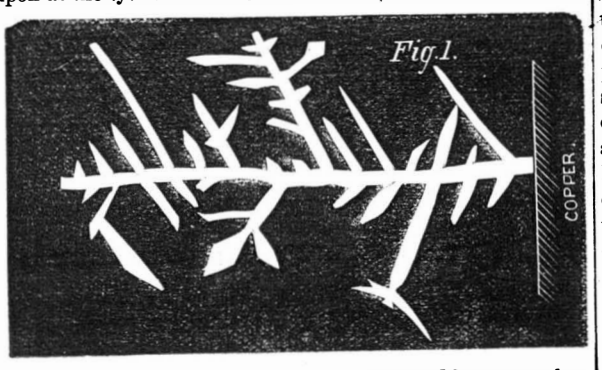


the salt in one metal in solution is decomposed by some other metal. My assistant, Mr. Tribe, and myself have been lately examining these replacements, the metallic crystals which are thus produced, and the forces that act through the liquid.

Our more special attention has been given to the action of

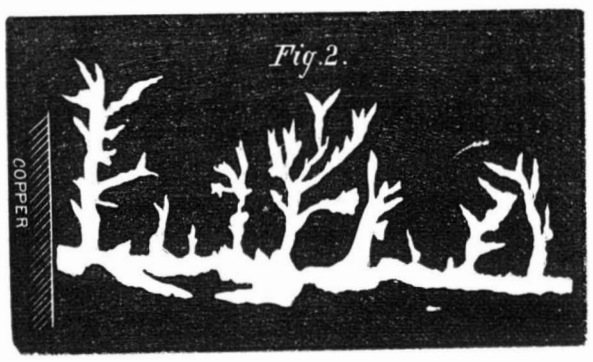


copper and nitrate of silver. The crystals of silver thus produced differ both in color and form, according to the strength of the solution. If it be very weak—say one per cent—the copper is fringed with black bushes of the metal, which, in growing, change their color to white without any alteration of crystalline form that can be detected by a powerful mi-

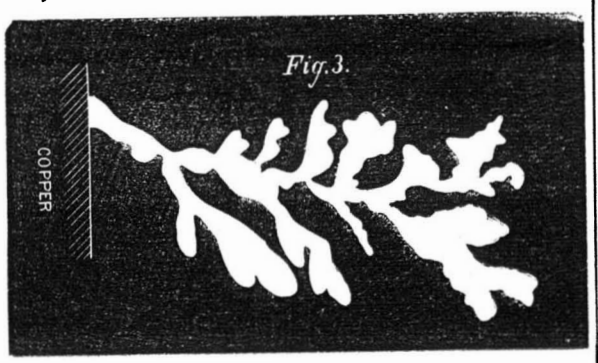


croscope. A stronger solution gives white crystals from the commencement, which frequently assume the appearance of fern leaves; the analogy between crystals and growing plants is a most superficial one, but it is convenient to draw our names from the garden. Stronger solutions yield a crystal-

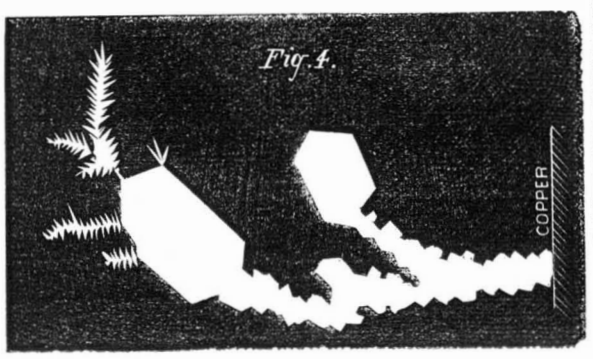


line growth rather resembling furze bush, while those of 15 per cent or upwards give a steady advance of brilliantly white moss. In all these cases, however, when the solution in front of the growing crystals has been somewhat exhausted, certain prominent or well circumstanced crystals seem to mo

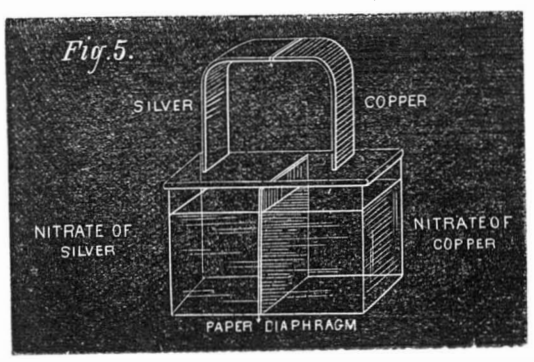


nopolize the power, and to push forward through the remaining portions of the liquid. This gives rise to beautiful branches, which assume a variety of graceful forms, but, as a general rule, the weak solutions give feathery and pointed crystals, as in Fig. 1: the moderately strong solutions tend towards jagged forms, as in Fig. 2; while the strongest grow branches that terminate, not in sharp points, but in rounded leaflets, as in Fig. 3. Besides this, there occur all kinds of crystalline combinations, as for instance, the spray sketched in Fig 4. It is very beautiful to watch the growth of these silver crystals round a piece of copper under the microscope; a blue glass underneath adds to the effect, but they are best seen when they reflect a strong light thrown upon them. If, instead of putting a piece of copper into a drop of nitrate of silver, a piece of zinc be placed in one of terchloride of gold, there is at once an outgrowth of black gold, which speedily changes to an advancing mass of yellow, or perhaps of purple metal; and it is very apt to form beautiful fringes, or to shoot its yellow branches rapidly round the margin of the drop. Acetate of thallium yields a forest of thorny crystals; and chloride of tin causes a luxuriant growth of large flat leaflets, or of symmetrical structures resembling fern leaves, except that the smaller fronds are arranged at right angles to one another. The new metal indium gives thick white crystals upon zinc; while bismuth and antimony form black fringes resembling the first action of gold.

The forms assumed by native metals resemble those produced by this process of substitution. In some cases, indeed, it seems almost certain that the deposition of these minerals was effected in the same way, as for instance, the silver which occurs sometimes in tufts, sometimes in large crystals, on the native copper of the Lake Superior district. Gold is frequently found in cubes more or less rolled, but the leaf gold from Transylvania bears a striking likeness to the crystals that form in our laboratory experiments. Silver is often found native as twisted hairs or wires of metal—a form that never occurs in the decomposition of its nitrate by copper, but which can be artificially produced in another way.

There has been noticed a singular tendency in old silver ornaments and coins to become crystalline and friable. Here is an ancient fibula from the Island of Cyprus, supposed to be at least 1,500 years old, which, through the greater portion of its substance, presents a fracture something like that of cast iron, and its specific gravity has been reduced in round numbers from 10 to 9. It contains a little copper. This property of certain metals, or their alloys, to change in condition and in volume, is worthy the attention of those whose duty it is to make our standards. Experiments should be instituted for the purpose of learning what metals or combinations of metals are least subject to this secular change.

These metallic crystals are Nature's first attempt at building. The material is the simplest possible—in fact, what chemists look upon as elementary. But how is the building carried on? What are the tools employed? Where are the bearers of burdens that bring the prepared pieces and lay them together according to the plan of the Great Architect? We must try to imagine what is taking place in the transparent solution. The silver, of course, existed at first in combination with the nitric element, and for every particle of silver deposited on the growing tree, an equivalent particle of copper is dissolved from the surface of the plate. The nitric element never ceases to be in combination with a metal, but is transferred from the one metal to the other. On the polarization theory, the positive and negative elements of the salt constantly change places and enter into fresh combinations, one consequence of which would be a gradual passage of the nitric element from the growing silver to the copper. This actually takes place, and there is a diminution of the salt at the ends of the silver branches, giving rise to an upward current, and a condensation of nitrate of copper against the copper plate, which gives rise to a strong downward current. These two currents are seen in every reaction of this nature. In the case of silver and copper, however, it has been proved that the crowding of the salt towards the copper plate is more rapid than would follow from the polarization theory. The instrument employed for determining this point was a divided cell in which two plates, one of silver and the other of copper, connected together by a wire, are immersed each in a solution of its own nitrate, contained in each division of the cell, and separated from one another merely by parchment paper. The crystals of silver deposited on the silver plate in this experiment are very brilliant.

There are other indications of the liquid being put into a special condition by the presence of the two metals which touch one another. Thus zinc alone is incapable of decomposing pure water, but if copper or platinum be deposited on the zinc in such a manner that the water can have free access to the junction of the two metals, a decomposition is effected; oxide of zinc is formed, and hydrogen gas is evolved. At the ordinary temperature, the bubbles of gas rise slowly through the liquid, but if the whole be placed in a flask and heated, pure hydrogen is given off in large quantity. We have also found that iron or lead similarly brought into intimate union with a more electro-negative metal, and well washed, will decompose pure water.

As might be expected, the action of magnesium on water may be greatly enhanced by this method; and a pretty and instructive experiment may be made by placing a coil of magnesium in pure water at the ordinary temperature, when there will be scarcely any effect visible, and then adding a solution of sulphate of copper. The magnesium is instantly covered with a growth of the other metal, and at the same time the liquid seems to boil with the rapid evolution of hydrogen bubbles from the decomposed water.

When, however, the force of the two metals in contact has to traverse a layer of water, the resistance offered by the fluid prevents its decomposition. This must also be an important element in the decomposition of a metallic salt dissolved in water, and, in fact, we have found that the addition of some neutral salt, such as nitrate of potassium, increases the ac-

© 1872 SCIENTIFIC AMERICAN, INC

tion—apparently by diminishing the resistance of the liquid. If, too, we increase the quantity of the dissolved metallic salt, we get more than a proportional increase of deposited metal. Thus, in an experiment made with the different strengths of nitrate of silver on the table, the following results were obtained in ten minutes, all the circumstances being the same except the strength of the solution: 1 per cent solution dissolved ·025 grammes copper; 2 per cent dissolved ·078 grammes, and 4 per cent dissolved ·224 grammes.

In fact, it had been found that, in solutions not exceeding 5 per cent, twice the amount of nitrate of silver dissolved in water gave three times the amount of chemical action; and this was true with other metals also in weak solution. It is likely that this is not the precise expression of a physical law, but it agrees at least very closely with the results of experiment.

The power arising from this action of two metals on a binary liquid may be carried to a distance and produce similar decompositions there. This is ordinary electrolysis. Metals have been crystallized from their solutions in this way, and Mr. Braham has made excellent preparations of crystalline silver, gold, copper, tin, platinum, etc., by using poles of the same metal as is intended to be deposited upon them. The forms thus obtained are precisely analogous to those produced by the simple immersion of one metal into the soluble salt of another, and illustrate still further the essential unity of the force that originates the two classes of phenomena.

## Correspondence.

*The Editors are not responsible for the opinions expressed by their Correspondents.*

### A Plea for the Classics.

*To the Editor of the Scientific American:*

In your issue, dated May 25, I noticed, in an article entitled "How to Conduct Scientific Investigations," this sentence: "Not only are physics and mechanics more pleasant studies than Latin, and chemistry more interesting than Greek grammar, but we assert that a man may make more money, by applying a mere superficial knowledge of these sciences, than by a much more profound knowledge of the dead languages." From the above, one would draw the conclusion that money making was the chief end of man. If that be so, perhaps the writer is correct. But man was born for a higher purpose than the simple attainment of wealth. I maintain that every man who comes into the world was put here to make humanity better for his being in it, and not only for his own aggrandizement; and he who fails in this, fails to do his duty. Society demands some benefit from all, in order that it may advance. And fine literature will cause this advancement. I challenge any man to bring forth writings on any scientific subject whatever, chemistry or botany, natural history or mineralogy, and in them will be found derivations from the dead languages. Ask any eminent lawyer what advantage he has gained from the study of Latin and Greek; the universal answer will be "almost every thing." Look at his law books, and you will find nearly every alternate word to have derivation in the ancient languages Although I do not wish to depreciate Mr. Bryant's translation of Homer, yet I assert that no one can fully appreciate the work until he has read the original Greek. A man may have the most "profound knowledge" of any science, and yet it would be almost impossible for him to deliver a lecture on that subject and not make some stupendous grammatical mistakes, provided he is ignorant of the classics, thereby making himself the laughing stock of the community. Not long since, a case came under my personal observation, in which a young man who never had looked into an English grammar, yet had a tolerable knowledge of the classics, was placed in an examination on that subject (English grammar), with several who knew nothing of Latin or Greek, but had always studied English; the consequence was that the one understanding Latin passed better than three fourths of the rest. This only goes to prove how utterly dependent our own language is on the classics. When a boy or girl is striving to obtain an education, he or she should not only study what will be of practical utility, but what will prepare the learner for the battle of life. The study of these languages gives the brain a thorough drill that can be obtained in no other manner; it compels the mind to think, and think correctly; to rely on its judgment, not on its memory; whereas mathematics and natural sciences give exercise only to the latter, which, too often, is fickle. Step into the Senate chamber of the United States, count the noses, and you will find that a majority of the members are classical scholars and college bred men. From the foregoing remarks, no reasonable man can fail to see that, while the sciences have their uses, they are still dependent upon language for their elucidation. And granting that more money may be made by their immediate use, nevertheless the classics lend influence to the "pen," which rules the world, and which, as all men know, is more "powerful than the sword." In conclusion, allow me to quote the memorable passage of Cicero: "*Idem ego contendo, cum ad naturam eximiam atque illustrem accessit ratio quædam conformatio doctrinæ, tum illud nescio quid præclaram ac singulare solere existere.*"* G. L. F.

### Testing Turbines.

*To the Editor of the Scientific American:*

As a well written communication by Mr. A. M. Swain, in the SCIENTIFIC AMERICAN of June 1st, on the subject of turbine wheels, pointedly alludes to a short article of mine, on page 228 of the current volume, and somewhat misconstrues me, I beg to say a few words in reply, not defensive, for my impression is that such are not needed, nor controversial, for I have not the time even if you had the space.

The inference seems to have been formed that the test of which I spoke was made in raising water. I did not intend to say this. I suppose in every test, if its commercial aspect is to rule, the water discharged, time, and the net result, are the elements of calculation. In this case, the head was 110 feet, the water discharged by the hydraulic engine—not a ram—about 42 per cent of what the turbine used for the same work in raising a weight. If there is a more simple method, a more accurate one than this, I would like to know it. In Mr. Swain's communication, overshot wheels are instanced. I propose to follow them up as proof. If an ordinary overshot receives pressure earlier than at 45° away from a vertical line through its shaft, it discharges it enough earlier, than at the corresponding angle below the shaft, to render it next to certain that the full weight of the water utilized cannot be greater than what is due to the capacity of the buckets between these points. This quantity would be represented by the 90° remaining between them, or 50 per cent of the weight of water the buckets would contain if the whole diameter of the wheel were effective. How then could 70° of the discharge be raised to its head, even if taken from the tail-race? And much less could it be done if taken from a mine.

There is, doubtless, some "inaccuracy" about the process. A parallel holds good as between an overshot wheel, using about 90° of its circumference, and a hydraulic engine. In each, if the instrument is withheld from movement, the power is retained; but with a turbine, a forcible total stoppage only checks the flow, and power is lost. If in the most approved turbines, 8 per cent of water under pressure is intentionally freed, is it not done to give the best effect to the balance? And if so, does it not go to show that my use of the word "speculation" was not loosely taken?

This loss by a turbine, I hold to be a fair representation of the disparity between the two systems; but it is very much understated in the 8 per cent; and the 12 per cent is demanded as a reasonable allowance for other things. Wherever allowances are asked, that have not been, perhaps cannot be, proved to be precisely right, I must still call them speculation. Only the weight of the water can be used as power, and a turbine does not use the whole. I cannot say that 86 per cent of the power of water upon an overshot wheel has not been utilized, but I am incredulous for the reasons stated, even though the buckets were made to trip, after a vertical passage the distance of the diameter of the wheel. Your correspondent, in speaking of the test I suggested, to wit, that of forcing back to its head as much water as the power would raise, has apparently overlooked the allowance I proposed for every necessary mechanical obstacle. This allowance need not complicate the process; the difference between the quantity discharged and that replaced would measure the exhaustion of power; then if the "necessary obstacles" were or could be measured, and added to the replacement effect, raising it to its original condition in the reservoir, my case would be lost. I have no arguments against turbine wheels; they are excellent devices and are doing immense service; but I only do not believe that they have ever used the percentage of power claimed. R. H. A.

Baltimore, Md.

### The Cherokee Tribe of Indians---A Subject Interesting to Antiquarians.

*To the Editor of the Scientific American:*

If I am correct in memory, it was near twenty years ago when I met with Henry E. Colton in Macon county, North Carolina, and his business seemed to be an inquiry after the ancient relics, as well as traditional history, of the former inhabitants of the country, to wit, the Cherokee tribe of Indians. Mr. Colton directed one enquiry to myself: "What could have been the intentions of the Cherokee Indians in building so many large earth mounds that were met with in the low grounds of these mountain valleys?" My reply was that "the Cherokee tribe of Indians disclaimed all knowledge of the origin of those earth mounds, as well as the purposes for which they were built; and, furthermore, that I had evidence, satisfactory to myself, that these mountain valleys had once been inhabited by some race of people antecedent to their occupancy by the Cherokee Indians; and that this fact I inferred from the wide diversity in form, material and quality of their pottery, as well as their edged or cutting utensils, but more particularly as regarded their mode of sepulture, which, in all races, is permanently fixed; and in pursuance of this subject, I related to Mr. Colton the following incident: After the Cherokee Indians abandoned the country in the year 1821, I, in a spirit of romance, became a small farmer in a wild and picturesque valley in the country the Cherokees had left; and while plowing, in a low ground or bottom fields, in passing over a certain spot the plow produced a rumbling hollow sound, and this led to digging—rather scraping away the earth—in quest of the cause; at the depth of fourteen inches I met with charcoal, and then a clay slab that had been so highly indurated by burning that it had the hardness of a brick. An effort was made to take this slab up entire, as it was but seven feet in length and four in width; but this we failed to do, as it broke in turning it over. But what was our astonishment to find, on the reverse or under side, the complete cast of a human body, not a vestige of which was to be found! From all the appearances, the opinions I formed at that time (and these opinions have not changed) were that at some remote point in the world's human history, some peculiar race of people inhabited this country, whose mode of sepulture was to place the body of their dead in a shallow grave in a nude state and on its back, with the limbs extended at full length, cover it with soft clay mortar, pile wood upon it and consume the body with fire. Furthermore, the problem was suggested: May it not be that this race, so far back in the history of man, were the mound builders? In my farming, I found but two other of these burnt clay sepulchres. All of these facts I narrated to Mr. Colton, and about thirty years after their discovery, and after the abrasion of time and the wear of the plow share in farming my lands had reduced these casts in the clay slabs to fragments.

For the first time after the delivery of the above narrative to Mr. Colton, I met with him at a Cherokee Indian ball play, and this was in the year 1860; and he addressed me, as I then thought, somewhat rudely, in these words: "Mr. McDowell, some years ago you described to me some peculiar Indian sepulchres you had found in your fields—have you, since then, discovered any more of these?" My reply was "I have not." He rejoined: "The reason why I now name this subject is this: I published your narration, and archæologists and antiquarians give no credit to your story, because, they say, it is contradictive of all the modes of sepulture yet discovered among the various tribes of Indians on this continent, and it is due to your reputation as a man of truth to find and exhibit one other of these sepulchres." I was wilted by Mr. Colton's words and manner, because, not knowing for why, I felt as though I were half a villain. I made him, I fear, an unmannerly reply that was more practical than pious, and have not seen Mr. Henry E. Colton since, nor have I searched for another sepulchre for the purpose of redeeming my lost reputation as a man of truth.

And yet a kind Providence has saved me, from going down to my grave disgraced, in this way: The 16th day of this month was the recurrence of my seventy-seventh birthday, and a team of oxen were pulling a deep running plow through my field, when the point of the plow struck upon the side of one of these burnt clay sepulchres and rent from it a small portion of an arm. I had the plowing stopped, and the locality marked, and it shall remain intact until some scientific individual arrives who can superintend the delicate process of raising the sepulchral slab without injury to the cast of the human figure impressed upon it. I have intrusted the procurement of the proper man to direct this delicate operation to Colonel C. W. Jenks of St. Louis, now superintending, for the American Corundum Company, the working of the Cullasajah corundum mines in this county.

Franklin, Macon county, N. C. SILAS MCDOWELL.

P. S. Since the 25th inst., when Colonel Jenks and myself conversed publicly on the above subject, eleven of these sepulchres have been reported to me, found in different localities. S. McD.

### Do Snakes Charm Birds?

*To the Editor of the Scientific American:*

In taking a morning stroll by a board fence, I discovered a cat bird fluttering along on the edge of the top board, which was about one inch in thickness; and walking closely up to it, say within four or five feet, I discovered a black snake, about four or five feet long, lying well balanced on the edge of the top board. Neither the bird nor his snakeship seemed at all disturbed at my proximity; but the former, crying and with hanging wings, would advance and retreat, each time seeming to approach nearer to the glistening eyes of its charmer. My sympathy was at once aroused for the bird, and fearing that in its next advance it would be taken captive, I took off my hat and held it on the fence about two or three feet from the snake's head "to break the charm;" but to my surprise, as before, here came the bird towards the hat; it flew over it and lit on the fence near to the serpent's tail. I then armed myself with a cudgel about two feet long, and stepped back about a rod from the parties to observe strategic movements. The bird continued the same movements at the tail which it had done at the head, advancing and retreating, drawing nearer each time, until finally it lit on the tail, then off on the fence, still fluttering, chirping and crying. His snakeship did not seem to fancy an attack in the rear, and slowly lowered about one foot of the tail end, and let it hang down the side of the board. The bird, encouraged by this move, again and again lit on the back part of the body toward the tail and once struck it with its bill. The snake not being able to turn its head back and keep its balance on so narrow a base, it retreated from the bird, coming towards me (it seems that I was not worth its notice), moving slowly along until it reached the post, passing it far enough for the middle of its body to rest on the post. I began to think that it had given up the chase; but not so, for, with all the wisdom of the serpent and the calculations of a civil engineer, he turned his head, doubling himself until his head was within about six inches of the end of the tail, head slightly elevated, and seemed to say: "Now, birdie, come on." Sure enough, it came, fluttering and crying as before. I advanced to within about three feet of the snake, stick in hand, ready for the "clash of arms." The bird approached so near before retreating, I feared to let it advance another time, and immediately made battle in its behalf, and so slew the "sarpint." A darkey, witnessing the conflict, took the snake, saying: "I will hang him up wid his belly to de clouds to make de rain come." And now I cannot tell whether or not a snake can charm a bird; can you?

H. L. EADES.

South Union, Ky.

### The Nebular Hypothesis.

*To the Editor of the Scientific American:*

Your comments on the "Nebular Hypothesis," page 345, current volume SCIENTIFIC AMERICAN, are very interesting, but I differ from you. I am confident that the equatorial zone cooled first and that the mighty force of that shrinking belt was resisted by no other force. The central mass was

*Similarly, I assert that when reason adds, to an exceptional and enlightened nature, some system of education, the celebrity and distinction that there may lie in is unknown.—*Eds.*]

© 1872 SCIENTIFIC AMERICAN, INC

too light and powerless; we cannot rotate an inflated bladder and burst it by the weight of air contained therein, as the air would escape through the pores of the bladder, but we can burst it by the weight of the bladder itself.

If any portion of the nebulæ was left behind, it was the lighter portion, which, owing to that irresistible shrink, spiralled to either pole and like smoke from a pipe streamed on the solar orbit. True, the action of gravitation would be greatest at the poles, but the spiral would reduce it to a minimum, as in a jack screw. Nebulous rings could have formed in no other manner; spheres could have been formed by shrinking belts. TIRE.

### Paris Green and Potato Bugs.

*To the Editor of the Scientific American:*

Much has been said, and a great deal written, concerning the use of Paris green for the destruction of the potato bug. Many advise the use of it dry, mixed with flour. Last year, I tried another way, which I think is safer and cheaper; and it proved very effectual. As it may be a benefit to many, I give it as follows:

Take one large table spoonful of Paris green and mix it with ten table spoonfuls of flour. These must be mixed very thoroughly, till the mass is of one shade ofc olor throughout. Take of this mixture, two table spoonfuls, and put it into a gallon of water. Stir this till it is all well mixed through the water, and stir it occasionally to keep it from settling,—for if it is not kept stirred, it will settle. Put the water thus prepared into a sprinkler, and apply when the plants are dry and the larvæ are at work. In a very few minutes, the larvæ will have gone to "that bourne whence no traveler returns."

The liquid applied this way, twice or three times during the season, will be sufficient to protect the plants. Used in this way, while it will destroy the insects, there is no danger of its hurting the plants; nor does sufficient go into the ground to do any harm. X. PERRY MENTOR.

Sans Souci, Ohio.

## THE NEW STATE CAPITOL AT ALBANY, N. Y.

After three years labor, and at a cost of two millions of dollars, one third of the new capitol at Albany, the design for which we illustrated on page 242 of Vol. XXIII., may be considered complete. The foundations are laid, and the water table, and four feet of the first story walls, is in position.

The structure covers about three acres of ground, its width being three hundred feet, and its depth, four hundred. The cellar is excavated 26 feet and its floor is covered with a solid bed of concrete four feet in thickness. On this rest the piers of massive brickwork which, surmounted by groined arches, bear the weight of the structure. Long vaulted passages are thus formed which, intersecting each other, traverse the entire cellar, some leading to apartments in the corners of the building, others to the large hall in its center. The last mentioned division of the cellar is designed for an engine room, and is to contain four large furnaces and two engines, to be used for warming and ventilating the edifice. The ceiling of this apartment is, like those of the passages, formed of groined arches. These are 20 feet high, their spans varying from 11 to 20 feet, and are considered the finest specimens of masonry of their kind ever constructed.

The foundation of the main tower is the heaviest piece of solid stone work in the building. It is pyramidal in shape, its base being 150 feet, and its top, 80 feet square. It is sunk six feet below the surface of the cellar, and its extreme strength is necessitated by the immense superincumbent weight of tower which will be constructed entirely of stone and iron, and will reach a hight fifty feet above that of the dome of the Capitol at Washington.

The exterior foundation walls are 20 feet thick; their lower courses are built of a species of blue limestone of great hardness, obtained in Essex county in this State. The upper portions, which are more liable to be affected by frost, are constructed of Saratoga granite, and the lintels, of a very coarse granite from Fall River. The water table is built entirely of Dix Island granite, the company supplying that stone having had a contract to employ it exclusively in that part of the structure. On the completion of the water table and the consequent expiration of the Dix Island Company's contract, new proposals were invited from other quarries to supply the stone for the rest of the building. Sixteen competitors entered, and, in the end, the work was awarded to a company in Yarmouth, N. H., who agreed to furnish the stone at 75 cents per cubic foot delivered at Albany. It seems, however, and the fact will account for the delay in the progress of the work which the daily press have lately made the subject of unfavorable comment, that the Yarmouth Company failed to carry out their contract, sending only some eighteen or twenty carloads of stone around by land at considerable expense. The Keene quarry, of Keene, N. H., offering to supply their stone at 85 cents per cubic foot, the commissioners have agreed to take the balance of the material from that source.

Of these three varieties of granite—the Dix Island, the Yarmouth, and the Keene—the Dix Island is much the coarsest in texture; the Yarmouth and Keene stones resemble each other very closely, both being white, fine, and hard. The Keene, however, is found to be slightly the most brittle under the cutting tool.

The stone is quarried in enormous blocks, some weighing as much as thirty tuns. They are so cut as to make all the angles of the building solid, or, in other words, there is no angle on the outside of the building where two stones meet and form a joint. The manipulation of these ponderous masses was, of course, at first a matter of no slight difficulty, but lately a form of derrick has been devised by which they can be raised or transported from place to place with the utmost facility. The apparatus consists of a heavy platform mounted on trucks and resting on a track, the rails of which are some sixteen feet apart. On this platform is a ponderous crane, secured by strong wooden stays. To the crane, heavy tackles are attached, the falls leading to a hoisting apparatus worked by a five horse power engine, situated on the rear end of the platform. This engine, being geared to the wheels of the latter, supplies the motive power; so that a stone can be lifted by the crane and the whole machine moved bodily to any desired point.

Seven hundred men are now at work upon the building, the majority being engaged in cutting the stone, which is supplied in the rough, into the required forms. Two large sheds serve as workshops, movable derricks running on tracks transporting the stones to any required locality. The work is systematized with the greatest care. Each man is required to work his stone through from beginning to end. The stone is numbered and the work measured, so that it can readily be seen whether the full day's work has been properly performed or not. The hands are paid by the hour. They struck some time since on account of some workmen from another State being put to work with them, and at the same time demanded $4.50 for eight hours work. A short time had elapsed, however, before the union in this city informed them that it could support them no longer, and consequently they compromised at 45 cents per hour, and signed an agreement to find no more fault either in their wages or in the fact of non-union men being put to work with them. When the present excitement commenced, a committee endeavored by threats and other means to induce another strike, but on the wages being raised to 50 cents per hour, the men declared themselves satisfied and refused to resort to any further coercive measures.

### A Monster Cannon.

The Russian government has lately constructed and tested an immense smooth bore cast iron cannon, made after the method of the American Rodman guns. The *Engineer* says that the weight of this weapon in a finished state is 44 $\frac{22}{62}$ tuns. The weight of the projectile to be employed—a cast iron spherical one—is 900 lbs. In trying the gun, in all 313 rounds were fired, the normal charge of prismatic gunpowder being about 117 lb. The experiments of firing were conducted on the river Rama, the high bank across the stream serving as a butt, which was at a distance of about 1,400 yards of the gun. The weapon was placed under an iron plated covering of a peculiar construction. On the discharge of the piece, the concussion of the air was so great that in the village of Matoriloro, situated at a distance of one third of a mile, the chimney stacks fell in when the wind was blowing in that direction. The sound itself, although loud, was not deafening, and persons standing even under the iron plated covering were able to support both the noise and concussion of the air. The iron gun carriage weighs 6$\frac{14}{32}$ tuns. The breech of the gun is elevated and depressed by means of a screw ratchet key. For facilitating the running forward of the gun, a system of cog wheels is introduced, and for the diminution of the recoil and the hoisting of the charge and projectiles, special appliances are provided. The moving of this enormous mass of iron can be effected easily by three men.

After the introduction into the military art of rifled cannon, the conviction became established of their unconditional superiority over the smooth bores. As regards guns of small caliber, this opinion may very likely be correct; but with respect to naval guns of the largest calibers, it would be difficult to give the preference either to the one or the other system. Without going into particulars of the merits or demerits of the one or the other description of weapon, we will point to one important difference in the effect of the spherical projectiles of the smooth bores and the oblong ones of the rifled guns; the latter will hit an iron plated target at a greater distance than the former, and, so to say, pierce it through; on the other hand, the former will produce a far greater amount of concussion, shaking loose the rivets of the plates and bolts of the target, and bounding on the plates and cracking them. Besides the difference in the destructive action of these weapons, there is an enormous difference in the cost of production. Thus, for instance, according to a statement of Mr. Grasshof, the price of a 20in. smooth bore gun will be, when produced in quantities, about $8000, whereas an 11 in. steel rifled piece corresponding to the same could not be produced under $30,000.

### New Fishing Smack.

A marine novelty worthy of attention was lately exhibited in Glasgow. It was a model of a welled fishing craft, 4ft. long, with 19 in. beam, clinker built and neatly finished. The exhibitor was Mr. Dempster, of Kinghorn, who is well known for his advocacy of deep sea fishing, and who proposes to convert ordinary open decked fishing smacks into well decked boats, by laying a well caulked deck or flooring from stem to stern, at a hight of 2½ft. from the keelson, the space beneath this deck forming the well, which is filled with sea water from several small circular holes in the bottom of the boat. At a hight of 5ft. or 6ft. above the well deck there is another deck, which rises to within a foot of the gunwale, and which, being water tight and comfortable, is adapted for the quarters of the crew. Mr. Dempster has proved the advantages of this style of fishing craft by actual results in practice; and he claims for his system the advantage that, no matter what seas the boat may ship, it is impossible for it to be swamped, as the water immediately makes its way out at the bottom.

### New Theory of Atmospheric Electricity.

A correspondent, Mr. G. Wright, of Rock Falls, writes as follows:

"The earth is surrounded by an electrical atmosphere which is subject to the law of gravitation, and is consequently more dense near the surface of the earth, and more rare in the higher regions. All the phenomena of electricity are due to the disturbance of this electrical atmosphere, in connection with the resistance of different substances to the passage of the electric fluid. When any substance has more electricity than another substance near it, it is in a positive or charged condition; when it has less, it is in a negative condition, and the attraction which negative substances exhibit for the positive is only the tendency to restore the equilibrium.

If a bladder be filled with air near the surface of the earth, and then elevated to a considerable distance, the confined air will burst the bladder and escape, because the atmosphere which surrounds it in these higher regions is of less density. So if a metallic ball, having the electrical condition natural to the surface of the earth, be suddenly elevated, its natural electricity becomes a charge, which may be drawn off by a spark. This fact can be demonstrated, on a still day when the air is free from moisture. Now, what better evidence do we want to prove that the earth is surrounded by an electrical atmosphere, more dense near the surface of the earth, and that the charge on the ball which was elevated is due to the lesser density of the electrical atmosphere which there surrounds it? When we add to this the chain of evidence which results from the explanation, of electricity in the clouds, the causes of *aurora polaris*, the daily variation of the magnetic needle, and every other electrical phenomenon, on this hypothesis, the proof is as positive that the earth is surrounded with an electrical atmosphere as that it is surrounded with an aerial one. I have spent several years in experiments and observations to demonstrate the truth of this hypothesis, and upon it to establish a theory that shall be applicable to all electrical experiments and phenomena, and am astonished at the facility with which all questions pertaining to this subject can be solved."

### Refractory Clays.

Bischoff finds that the analysis of a clay gives a distinct indication as to its power of resisting extreme heats. The temperatures were measured by keeping the clay at a white heat till wires of iron or platinum were fused. The value of a refractory clay is found by the proportion of the alumina to the fusible matter, and again by that of the alumina to the silica. The more alumina a clay contains in proportion to the fusible matter (iron, alkalies, etc.,) the more refractory is it. Silica, on the contrary, augments its fusibility. Of two clays containing alumina and fusible matter in the same proportions, that which contains least silica is most refractory. Save in certain determinate cases, the clays containing alumina, silica, and fusible matter in equal proportions have an equal power of resisting fire. If we give to clays the general formula—m $Al^2 O^3$ + n $Si O^2$ + RO, the degree of resistance to fire is measured by $\frac{m}{n.}$ The higher the value of this fraction, the more refractory the clay.

PUT UP YOUR JAM WHILE HOT.—It is said that ordinary jam—fruit and sugar which have been boiled together for some time—keeps better if the pots into which it is poured are tied up while hot. If the paper can act as a strainer, in the same way as cotton wool, it must be as people suppose. If one pot of jam be allowed to cool before it is tied down, litttle germs will fall upon it from the air, and they will retain their vitality, because they fall upon a cool substance; they will be shut in by the paper, and will soon fall to work decomposing the fruit. If another pot, perfectly similar, be filled with a boiling hot mixture, and immediately covered over, though, of course, some of the outside air must be shut in, any germs which are floating in it will be scalded, and in all probability destroyed, so that no decomposition can take place.

HYDROFLUORIC ACID.—Mr. A. P. S. Stuart remarks that every one who has prepared hydrofluoric acid knows that sulphuric acid and fluor spar form an exceedingly hard rock-like compound, and that it is very difficult to remove this from a platinum retort. This inconvenience may be avoided by mixing with the fluor spar about an equal weight of gypsum and the proper quantity of sulphuric acid. After the hydrofluoric acid has been expelled by heat, the mass in the retort is found to be of a pasty nature, and is easily removed by water.

FATHER CLEVELAND.—Charles Cleveland, a respected clergyman of Boston, Mass., widely known for his useful and faithful labors, died recently in that city, at the remarkable age of one hundred years—less sixteen days. He retained his faculties up to the moment of his death, and continued in the exercise of his peculiar ministrations as city missionary until within a few weeks. After attaining his majority, he spent forty years in mercantile pursuits. His work for the past forty years has been remarkable. He devoted his whole time to ministering to the poor, and his labors were highly appreciated.

STRETCHING OF CHAINS.—Professor Trowbridge, of Yale College, has stated that at the Novelty works, N. Y., he once made a chain one thousand feet long, to be used for pulling a load of ten tuns up an incline five hundred feet long and one hundred feet high. In one year he took out, little by little, sixteen feet of slack caused by stretching. The chain got stretched out in time, though, and then did not alter.

© 1872 SCIENTIFIC AMERICAN, INC

### Improved Piano Truck.

The improvement we illustrate consists in making the trucks adjustable in regard to the bed which carries the load, so that they can be fixed at any required distance apart, by which means they may be fitted to stairs of various forms, and used to run pianos, or other heavy goods, up and down them. They are also readily detached from the bed when required, to facilitate loading or unloading.

Our engraving represents the improved truck while conveying a piano up (or down) stairs.

A is the bed, which is furnished at one end with the handle shown, and at the other with two straps, one of which is seen in the engraving. It is also furnished with four cushions, two fixed and two adjustable, on which the piano rests; three of these are partly shown between the bed and the piano. The trucks, B, are provided on both sides with grooved slides, as at C, by means of which they are made to travel on, along, or off the bed, A. They are fixed to the bed in any desired position by the screws, D.

In ascending or descending stairs the trucks are adjusted to the position shown in the drawing, so that, when one pair of truck wheels are snug against the riser of one stair, the other pair are rolling on the tread of another. By this adjustment one pair of wheels is always in position to be raised or lowered to the next stair. When required to put the piano into a wagon, the truck is raised by the straps until the handle end touches the ground, the piano resting on the handle; the upper truck is next slid off the front of the bed, which is then let down into the wagon; the other truck is then removed, and the bed and piano slid in. In taking it out, the bed is pulled out far enough to have one of the trucks put on it; the inner end is then raised until the outer end rests on the ground, when the other truck is put on; it is then gently lowered until the bed stands on all four wheels. While moving the piano over floors, sidewalks, etc., the spring of the bed between the cushions on which it rests prevents all jar to the instrument.

Altogether this seems to be a very useful as well as an ingenious invention. It is protected by patents issued March 16, 1869, and September 19, 1871. Further information may be obtained of the inventor, Mr. Charles A. French, of Davenport, Iowa.

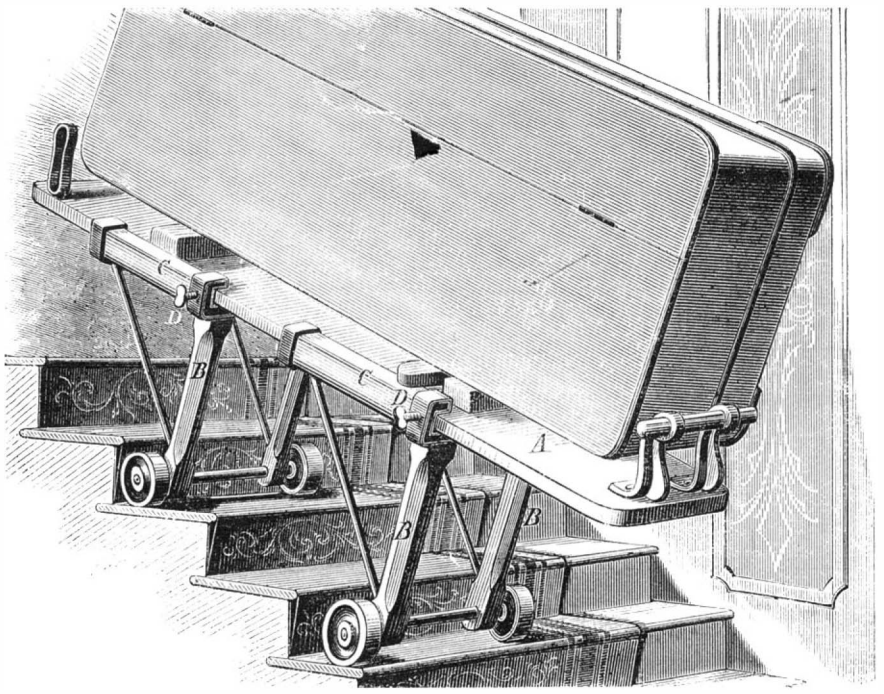


FRENCH'S PIANO TRUCK.

### Sawing, Boring, and Planing Machine.

The invention we illustrate supplies workers in wood with a useful machine that can be readily adjusted for service either as a scroll saw, a circular saw, a planer, or a boring machine, and which may be run by hand or by power, as desired. Its most important feature is a skillful and effective contrivance by which the speed is multiplied and the power conveyed from the driver to the tool.

The machine is represented in Fig. 1, and Fig. 2 shows, in detail, the peculiar arrangements of pulleys and belting for conveying the power, etc. A is the driving pulley or drum. B are belts which pass around it, and around the loose pulleys, C. These belts are drawn inward, on opposite sides, as shown in Fig. 2, so as to surround the shaft or small pulley, D, and communicate motion to the same. The loose pulleys, C, run on a shaft attached to the upper ends of two levers, one of which is partly shown in Fig. 2; the lower ends of the levers are connected by a crossbar, to which is attached a strap that admits of being secured to the frame of the machine, as shown in Fig. 1. By this arrangement the tension of the belts is adjusted. The shaft, D, extends across the frame, and carries at its outer end the fly wheel, E; this is attached by a pin to a connecting rod which gives motion through a crank to the rock shaft, F, the crank being adjusted so that the revolution of the fly wheel only rocks the shaft. This motion of the rock shaft is conveyed through slides to the scroll saw, causing it to make its downward stroke; the recoil is secured by the band, pulleys, and spiral spring seen at the top of the machine.

To the shaft, D, may be attached a circular saw in the ordinary manner, and to its inner end (not shown in the engraving) a cutter head, suitable for light planing or molding, or a boring tool, may be affixed. The table is provided with gages, and is adjustable to any elevation required by the character of the work. Our engraving shows both scroll and circular saw attached to the machine, but, in practice, when the scroll saw is used, all the other tools should be detached from the shaft; and when either circular saw, planer, or boring tool is employed, the crank pin of the fly wheel should be detached from the connecting rod, and the operation of the scroll saw prevented. The position of the belts on the pulley or shaft, D, puts equal pressures on opposite sides of the same, and does away with all side strain. Almost the entire periphery of the shaft is in contact with the belts, and a very large surface contact, as compared with the size of the shaft, is obtained. This, and the absence of the usual intermediate belts and pulleys employed for attaining speed, insure the utilization of the power applied and prevent its waste. We are informed that the hand power machine has been employed to saw three inch hard oak felloes and other carriage work with perfect success. It is manufactured extensively by the Greenwich Mowing Machine Company, of Greenwich, N. Y., of whom further information may be obtained.

Patented through the Scientific American Patent Agency for the inventor, Mr. William Weaver, October 3d, 1871, and January 30, 1872

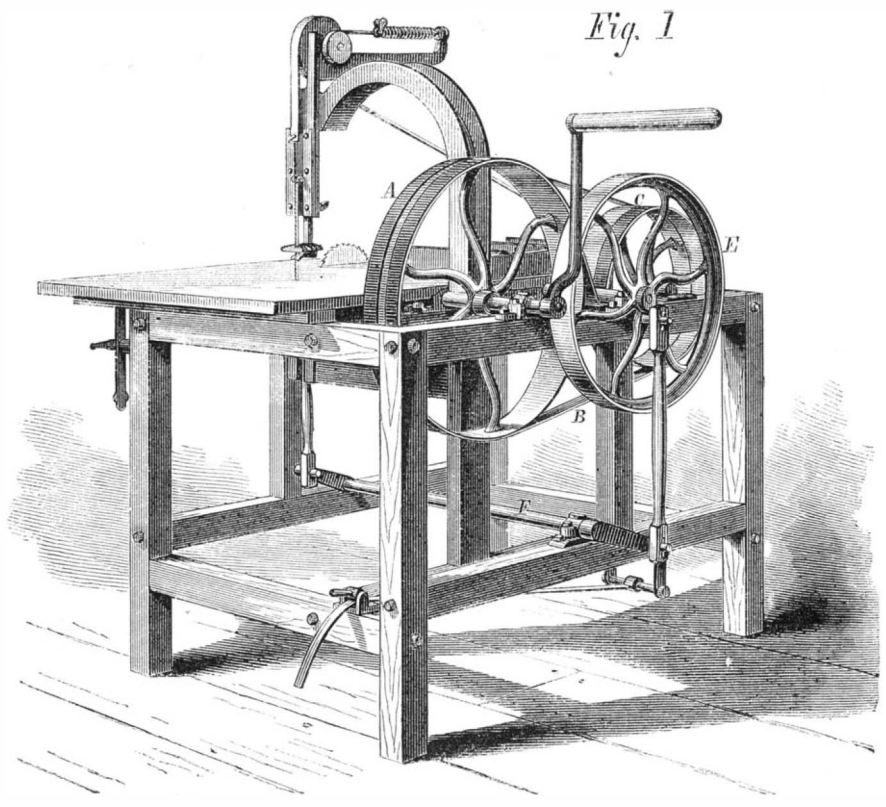


WEAVER'S SAWING, BORING, AND PLANING MACHINE.

Fig. 2

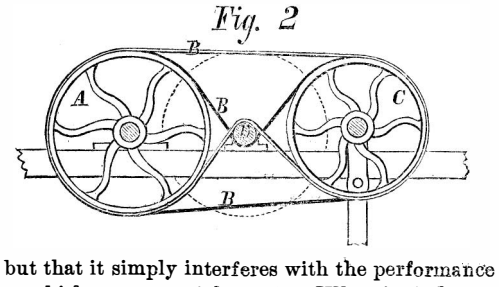


### Impurities in the Air.

Carbonic acid is not a poison by reason of any action on the blood. When it is present in the atmosphere in large amount, the glottis spasmodically closes, and death ensues from asphyxia. When in small proportion, it is still not taken into the system, but it interferes, to the extent of its presence, with the absorption of oxygen, and the elimination by respiration of the blood. Essentially, therefore, its action is that of a ligature to the trachœa. Thus I put this mouse into a jar of pure carbonic acid gas, and you observe that the animal dies in a few seconds. This other I place in an atmosphere containing forty per cent of carbonic acid, and death takes place after a longer interval, but still in essentially the same manner as in the first instance. If, however, as in the next experiment, I remove the animal before death takes place, and expose it to a free current of atmospheric air, recovery follows very promptly. It is hence apparent that carbonic acid gas is not a directly poisonous substance, but that it simply interferes with the performance of processes which are essential to life. When its influence is removed, provided the animal is not *in articulo mortis*, respiration goes on again as in health; just as, when a man hangs himself, and is cut down before life is extinct, recovery can generally be effected.

Phosphuretted hydrogen—a form of phosphide of hydrogen—is given off from all animal bodies, and especially fish; phosphorus abounding in these animals. It is the element which renders luminous the emanations from decomposing substances, and is frequently seen in the form of masses of luminous vapor over graveyards and other places where phosphorized bodies are undergoing decomposition. It is exceedingly poisonous, and acts with great energy on the living animal body when absorbed into the blood through respiration.

Sulphuretted hydrogen is still more poisonous, and is a constant emanation from decomposing animal matter. Dupuytren found that $\frac{1}{800}$ part of this gas in the atmosphere was sufficient to kill birds in a few seconds. In my own experiments, I found that small animals died after a few minutes when the $\frac{1}{1000}$ part of sulphuretted hydrogen was present.

As you see now, I place this mouse under a large bell glass, and introduce a very small amount of sulphureted hydrogen. The animal dies quietly, after an exposure of less than five minutes.

This was probably the chief agent in causing death in several cases which have occurred in churchyards and dissecting rooms.

The ammoniacal compounds and carbureted hydrogen are also highly deleterious, and when inhaled in concentrated forms are speedily fatal.

But, besides these, there is reason to suppose that there are present, in the atmosphere contaminated with animal emanations, certain living organisms.

### The Diamond Fields of South Africa.

On the geological questions connected with these diamond fields, Mr. John Paterson has propounded some new views based on a minute and careful examination of the appearances which presented themselves to him on a visit to the diamond fields. He discredits the theories which would refer the presence of diamonds in Grequaland West to any distant sources, and thinks the evidence incontestable that the marl soil, as he named it, in which the gems are now found, is the true matrix soil of the diamond. This marl soil, he considers to be the metamorphosed carboniferous shales of the country, and the change which has worked upon these shales, by which they have been transformed from the black carboniferous shale into the whitish ashy marl in which the diamonds are found, he attributes to intrusions of greenstone trap, which traverse the country from N. E. to S. W. in continually recurring dykes. Mr. Paterson gave some very interesting details of the extent and richness of the diamond diggings in South Africa, and in his picture of the Gong-Gong and Delport Diggings as "Great Rushes" in diggers' phrase, resembling in extent and richness Colesberg Kopje, but now nearly worked out, not by the hand of man in a few years, but by the angry waters of the Vaal River through many ages he found much groundwork of hope that the diamond discoveries of South Africa are to be no fleeting passing industry, but a continuous employment, not only for many years but for many ages.

### Testing Burning Fluids.

Pethuel Millspaugh of Kent, Conn., has obtained letters patent for an improved test for burning fluids.

This invention provides an improved instrument for testing kerosene oil and other illuminating fluids, and also for determining the specific gravity of fluids generally. The apparatus consists of an upright glass cylinder which is supported in the top of a chamber formed in the upper part of the base. A lamp is placed in the base, the heat from which is transmitted through the chamber to the lower part of the glass cylinder, and the chamber may be made to contain air, water, etc., as required to regulate its intensity. The glass cylinder contains a thermometer, which is fixed therein, and is closed at the top with a brass cover. The burning fluid to be tested is made to completely fills the glass cylinder, so that the thermometer is entirely submerged, and cannot be affected by the surrounding atmosphere. An orifice in the brass cover is opened to allow the escape of vapor from the fluid under test, and, when necessary, the lamp is lighted. A flame is held over the orifice, and at the moment the evolved vapor is ignited the temperature of the fluid is corectly indicated by the thermometer. In ascertaining specific gravities by this instrument a hydrometer is also placed within the glass cylinder in such a manner that its scale tube is free to move up or down through a hole in the brass cover. The surface of the fluid tested is plainly visible through the glass cylinder, and the scale may be accurately read.

QUICKSILVER has been found near Austin, Texas.

© 1872 SCIENTIFIC AMERICAN, INC

# Scientific American.

**MUNN & CO., Editors and Proprietors.**

PUBLISHED WEEKLY AT

**NO. 37 PARK ROW (PARK BUILDING) NEW YORK.**

O. D. MUNN. A. E. BEACH.

☞ "The American News Co.," Agents, 121 Nassau street, New York.

☞ "The New York News Co.," 8 Spruce street, New York.

☞ A. Asher & Co., 20 Unter den Linden, Berlin Prussia, are Agents for the German States.

☞ Messrs. Sampson Low, Son & Marston, Crown Building, 185 Fleet street, Trubner & Co., 60 Paternoster Row, and Gordon & Gotch, 121 Holborn Hill, London, are the Agents to receive European subscriptions. Orders sent to them will be promptly attended to.

VOL. XXVI., No. 26. [NEW SERIES.] *Twenty-seventh Year.*

NEW YORK, SATURDAY, JUNE 22, 1872.


**Contents:**

(Illustrated articles are marked with an asterisk.)


*Air Spring Printing Press ..... 407
A Monster Cannon ..... 413
A New Patent Law in Canada ..... 415
A Plea for the Classics ..... 412
A Recent Tornado ..... 416
Business and Personal ..... 417
Car Starter ..... 416
Cement from Sewage ..... 409
Chemical Action of Light ..... 408
Cincinnati Exposition ..... 416
*Crystallization of Silver, Gold and other Metals ..... 411
Diamond Fields of South Africa ..... 414
Do Snakes Charm Birds? ..... 412
Educated Railroad Men ..... 409
Improvement in Testing Burning Fluids ..... 413
Impurities in the Air ..... 414
*Kerosene Lamp ..... 410
Lac Anilines for Staining Paper, Leather, etc ..... 410
Masonry and Brickwork ..... 409
Miners' Unions in Prussia ..... 411
New Fishing Smack ..... 413
*New Magneto Electric Machine ..... 410
New Theory of Atmospheric Electricity ..... 413
Notes and Queries ..... 417
Novel Mode of Sawing Wood without a Saw ..... 407
Official List of Patents ..... 413
Paris Green and Potato Bugs ..... 413
Pencil Leads ..... 410
*Piano Truck ..... 414
Portable Frescoes ..... 416
Preparing Telegraph Poles ..... 409
Progress of the Eight Hour Strike ..... 415
Rapid Transit in New York ..... 415
Recent American and Foreign Patents ..... 417
Refractory Clays ..... 409
Rewards for Improved Railway Signals ..... 408
Rubber Graphite Paint ..... 416
*Sawing, Boring and Planing Machine ..... 414
Testing Turbines ..... 412
The Brewing Interests of the United States ..... 408
The Cherokee Tribe of Indians ..... 412
The Kaolin of the United States ..... 408
The Nebular Hypothesis ..... 412
The New State Capitol at Albany, N. Y. ..... 413
The Tariff and Tax Reductions ..... 416
Water Decomposed by Metals ..... 414
Weight, Pressure, Force, Power, Work ..... 415


## A NEW PATENT LAW IN CANADA.

We have the pleasure of announcing that the Parliament of the Dominion has just passed a new patent law, which, among other judicious provisions, grants to American citizens the privilege of obtaining patents in Canada on very favorable terms.

We hail the passage of this law as an indication of real progress on the part of the people of Canada. Its practical operations can hardly fail to prove advantageous to the material interests of the Dominion.

A valued correspondent in Canada furnishes the following *resumé* of the provisions of the new law, which goes into effect on the first day of September next:

The law provides that all inventors, or their assigns, may receive patents, provided a foreign patent for the invention has not been in existence for more than one year prior to the application being made for the Canadian patent. Improvements on existing patents may also be patented.

The applicant shall, for the purposes of the act, elect his domicile in some known place in Canada—this being a mere formality.

The patent will be issued for five, ten, or fifteen years, at the option of the applicant; but, at the expiration of the first five or ten years, the patent may be extended for another term of five years; there is no provision for extension after the fifteenth year.

In case of error or defective description, the patent may be reissued, as is the case in the United States.

In case of an assignment of a patent, such assignment must be registered in the Patent Office.

The law provides for remedy in case of infringement of patents—and also for the impeachment of patents before the courts.

Every patent will be subject to the condition that the patentee shall manufacture the invention in Canada within one year from the date of the patent; and the patent is to be void if, after the expiration of one year from its date, the patentee or owner causes the importation in Canada of the invention for which the patent is granted.

The fees payable to the Patent Office for each patent are at the rate of $20 for each period of five years. When the patent is refused, half the fees may be returned to the applicant. This rule is always acted upon.

Inventors may file caveats, to be kept secret and of record for one year.

Patents may be refused when the alleged invention is not patentable in law, or when it is already in the possession of the public, or when there is no novelty or utility in the invention, or when it has been described in a book or printed publication, or when it has already been patented in Canada, or elsewhere by the inventor for more than one year previous to the application.

When a patent has been refused, appeal lies to the Governor in council within six months after notice of such refusal.

In case of interfering applications, the case may be referred to three arbitrators, one to be appointed by each applicant and the third by the Commissioner of Patents—their decision to be final. The fees of arbitrators to be a matter of agreement, except those of the arbitrator appointed by the Commissioner, which are to be paid equally by both parties.

Patented articles are to be stamped as such, and a fine of $200 is imposed for false marking.

By reference to a card in another column, it will be seen that Messrs. Munn & Co. are now ready to receive applications for patents in Canada.

## PROGRESS OF THE EIGHT HOUR STRIKE.

The many acts of violence, to which the workmen supporting the eight hour movement in this city have taken recourse, seem to have culminated in the shooting of James Brownlee, a carpenter and non-society man, who was quietly at work in a shop on Forty-first street, near First avenue. It appears that two of the strikers threatened him with personal assault if he did not at once quit work and join them in the strike. Fearing that they would carry out their threats, Brownlee left the shop and passed into the street, when one of the men who had followed him drew a revolver and shot him through the cheek, saying at the same time "That's the way we treat such as you are." This atrocity, although promptly disavowed and condemned by many of the organizations, has produced a powerful effect on the community at large, and has resulted in a marked diminution of public sympathy for the cause. The threats of abandonment of work, on the part of the men employed at the gas works, have caused, during the past few days, considerable apprehension throughout the city lest the streets at night should be left in darkness, but the danger has been happily averted by the gas companies acceding to the terms demanded.

The small number participating in the procession, which was intended to exemplify the great strength of the movement, has been a source of disappointment to its advocates. The working men for some reason viewed the idea with disfavor, so that, instead of an army of thirty thousand men, barely twenty-five hundred paraded through the streets. There was no disturbance along the route, nor any cheering, but simply a lack of enthusiasm which fell like a pall on the sanguine expectations of the strikers. During the remainder of the past week, the desertion and returning to work of a large number of employees of Singer's sewing machine factory has rendered the movement still weaker; and although a considerable number of men still hold out, it is the general belief that it must eventually fail.

Advices from out of the city inform us that the strike is but little felt, and that its effect has been rather beneficial to manufacturers in other States. The reason is that the better class of workmen who have no sympathy with the movement find themselves compelled by the action of their trades' unions to leave the city and obtain labor elsewhere, while the malcontents throughout the country flock to New York in hopes of getting increased wages.

On the part of the manufacturers, the position adopted in the beginning has been steadfastly maintained. The pianoforte makers publish a series of resolutions which clearly and forcibly define the stand they have taken. They state that, in case they are forced to raise the price of the goods thirty-three per cent, they cannot compete with the makers in other parts of the country, in whose productions there has been no corresponding advance. Nor, since the trade in the smaller sizes of pianos is mainly local, can they afford to raise the price of their instruments, as the cost of an ordinary piano would then be so great as to be without the reach of a large majority. As far as this branch of manufacture is concerned, it is claimed to be evident that concession to the terms demanded by the working men is absolutely impossible; and we have been assured by the leading firms in the city that if they did yield to the exactions of the strike, the result then would be no worse than if they abandoned their business and sought investment for their capital elsewhere.

The carriage makers, although forming no combinations among themselves, agree in substance with the views of the pianoforte men. The proceedings of the workmen from the establishment of Brewster & Co., of Broome street, are the most incomprehensible of the many vagaries to which the strike has given rise. This manufactory has been carried on on a coöperative principle; that is, the employees owned an interest in the profits of the business. They were fully represented in the management of the internal economy of the concern, had a voice in the regulation of their own pay and hours of labor, and received dividends proportioned to the amount of wages paid them. Three days before the strike they declared themselves satisfied with the existing arrangement, and actually, as we are informed, refused to vote themselves eight hours as a day's work. In spite of all this, suddenly, at the instigation of a few malcontents among their number and intimidated by the trades' unions, they joined the strikers, and, in addition to leaving their work, deliberately forfeited a dividend of several thousand dollars, which was shortly to fall due them.

As to the final result of the movement, we consider that there is but little doubt. Want of support from other cities, the firm front presented by employers, together with the convictions, which are evidently being brought home to the minds of the more intelligent workmen, of the impracticability of the scheme, will end in its abandonment.

It is our belief that coöperation is the most efficient means by which the laboring classes can hope to secure the privileges which they now claim as rights.

## WEIGHT, PRESSURE, FORCE, POWER, WORK.

The fact that the above words are often confounded together, for the simple reason that their true meaning is not well understood, has been the cause of many fruitless attempts at mechanical inventions and improvements. Most searchers for perpetual motion make no distinction between pressure and force, and are under the delusion that mere pressure can produce work, and we have seen writers on mechanics and we have even heard lecturers on scientific subjects speak of a force of, say, two tuns weight. Weight alone is not force, neither is pressure equivalent to work; and it may therefore be useful to attempt some clear definitions of the above terms, in order to protect inventive minds against mistakes in mechanical reasoning.

Weight is simply the measure of an amount of matter referred to a certain standard accepted as a unit. This unit may be a gramme, a pound, a tun, or our whole earth, which the astronomers use; but, in either case, it conveys to the mind nothing but the conception of an inert mass, or a certain amount of matter, for the determination of which gravitation gives us the means of measuring and comparing. Therefore we may say: To have "a mass of two tuns," but not "a force of two tuns."

Pressure is a result of this gravitation, and a mass of two tuns will exert a pressure of two tuns; in this way, we may estimate the effect of a spring, hydraulic press, or other similar contrivance, by saying its pressure (not its power) is equal to two tuns, meaning thereby that it has the effect, on the material to be pressed, as if two tuns weight were placed upon it; but we have in pressure neither force nor power. These conceptions of the latter require other elements, as we shall soon see.

Force is matter in motion, nothing more, nothing less; the abstract idea of force without matter is a nonentity. All the modern discoveries in science tend to prove this more and more plainly. Without matter, force would have no existence, but it may be hidden in matter as molecular invisible motion in the form of heat, electricity, etc. The steam engine, electromagnetic engine, etc., are there to prove how this molecular motion, or hidden force, may be changed into visible force or motion of matter. Inversely, the caloric friction machine changes motion into heat; the ordinary and also the Holtz electric machine change motion into electricity. In any case, we are driven to the conclusion that all force proceeds from motion of matter, and is finally resolved into motion of matter, either of masses, or into molecular motion, generating one of the so-called imponderable forces.

Chemistry has proved since the last century that the amount of matter in the Universe is a constant invariable quantity, and that we cannot create or destroy a single material atom, but can only change its form from solid to liquid or gaseous, or *vice versâ*. So the modern philosophy of mechanics proves that the amount of force (that is, motion of matter) in the Universe is a constant quantity, and that we cannot create or destroy the slightest amount of this force, but can only change it from mass motion to molecular motion, that is, heat, electricity, etc., or *vice versâ*.

The measure of force is thus the product of the mass with the distance through which it moves; and as the unit of measure of ordinary masses is the pound, and of distances, the foot, we have adopted the foot-pound as the standard unit of force, meaning "one pound *lifted against gravitation* one foot," not "one pound moved one foot," as we have seen and heard it stated, which of course gave rise to the most absurd calculations in regard to the immense power obtained to drive a steamship or railroad train.

If one pound weight is raised one foot, one unit of force is expended; if, inversely, we cause one pound to descend one foot, we obtain a unit of force back, and may transform this into other mass motion, or into molecular motion. We may cause this mass of one pound to be raised slowly if we have little power to apply, or rapidly if we have greater power; and, inversely, we may cause it to descend slowly, as is done in the weight of a clock, and spend itself gradually during a long period of time, producing slight effects throughout that time; or we may cause it to descend quickly, as is the case with the blow of a hammer, and spend itself during a very short period of time, almost instantaneous, producing a powerful effect for that short time. So the driving in of a nail, which often the pressure of a tun weight would not accomplish, the blow of a hammer of one pound, lasting a small fraction of a second, will accomplish easily. This remark points out forcibly the difference between the weight of masses at rest and of masses in motion, in other words, the immense difference between mere pressure and force.

## RUBBER GRAPHITE PAINT.

A waterproof paint, for metal roofs, fences, bridges, ships, and every kind of wood structure, which, at the same time, could be relied upon to reduce the corrosive influences of exposure to the atmosphere, is an article for which the demand would appear to be almost without limit. A patent has just been issued, through the Scientific American Patent Agency, to Mr. Samuel F. Mathews, of Harrisburg, Pa., on an invention intended to meet the wants of the community in this respect; and from the ingredients he uses, we think his paint will answer a good purpose.

The rubber graphite paint is a solution of pure india rubber in linseed oil, which is ground with graphite into a thick, elastic, smoothly flowing paint. Compositions of which india rubber forms a part possess in the most eminent degree the quality of resisting the action of moisture and of corrosive gases carried in the air. In the graphite, we have a pure form of carbon; and it appears to be well known that paints containing carbon in any form last longer than other kinds not having it as an ingredient—holding their body and color when the other paints are totally destroyed. We do not see why this compound, combining as it does these two valuable elements, should not form a paint of great durability and highly protective qualities,

All shades of color from black to gray, or cream color and the drabs, can be made as desired. A company under the

© 1872 SCIENTIFIC AMERICAN, INC

title of the Rubber Graphite Paint Company has been formed, and has commenced the manufacture of the article at Harrisburg, Pa.

**Facts for the Ladies.**—Miss S. A. Davis, Berlin, N. Y., has used Wheeler & Wilson's Lock-Stitch Sewing Machine 17 years in collar making; supported herself and an invalid mother, whom she also tended, and has saved over $2,000; she has been a constant worker by foot power and not sick a day. See the new improvements and Woods' Lock-Stitch Ripper.

**Whitcomb's Remedy for Asthma** is one of the best medicines in use.

**Facts Worth Knowing.**—The New Wilson Under-Feed Shuttle Sewing Machine is to-day the simplest, most perfect, most easy operating, best made, most durable, and, in every way, most valuable Sewing Machine in existence, and it is sold fifteen dollars less than all other first-class machines, on easy terms. Salesroom, 707 Broadway, New York; also for sale in all other cities in the United States.

# Notes & Queries.

*[We present herewith a series of inquiries embracing a variety of topics of greater or less general interest. The questions are simple, it is true, but we prefer to elicit practical answers from our readers.]*

1.—Ocean Cables.—I would like to know if the Atlantic cable lays on the bottom of the ocean? Or if it is only part of the way down, what keeps it there?—H. F. H.

2.—Lard in Tin Cans.—Is lard injured by being stored in bright tin cans? If so, what is the chemical action which causes the injury? W. H. C.

3.—Plaster Casts from Dead Bodies.—I wish to know how to take a plaster of Paris cast of a tumor on a face, so as to represent the face and the tumor? What will give to the plaster a glossy finish? I can take a very good cast, but fail to get as good a finish as I have seen.—J. A. D. Jr.

4.—Paint for Iron.—Can any one inform me if there is any substance that can be applied easily, say with a brush or otherwise, in a thin coat to iron, that will stand heat to redness without melting, peeling off, or cracking?—E. J.

5.—Cement for Letters on Glass.—How are the gilt letters put on glass signs, so as to have the polished appearance that all such gilt letters do? The painters here do not know how to do it, although one of them is a subscriber to the Scientific American.—J. F.

6.—Separation of Oils.—By mistake one barrel raw linseed oil and one barrel West Virginia lubricating oil got mixed in our oil tank. Is there any means of separating the two oils?—R. K.

7.—Dimensions of Belt.—Can any one of your readers inform me what width of belt I require to convey one, two, or three horse power?—W. J. S.

8.—Weevil.—What will prevent the weevil getting into Indian corn? What will exterminate it from a lot of corn, shelled and in bags? How long will the corn keep safe from getting musty, when stored in open casks or common grain bags in piles, the bags standing on end on floor?—J. B.

9.—Gold Solution.—Will the gold solution to be applied by brush, mentioned in Scientific American, Vol. XXVI. page 280, adhere on the plating of buggy dash rims or harness mounting, as on iron or steel not so plated? If so, how long will it retain its brilliancy? Will it not soon come off? How are the mountings of harness plated with gold or silver? Must a battery be necessarily used in such plating, whether white or golden?—J. B.

10.—Test for Zinc.—What is the best test for zinc in wells where galvanized pipes are used? What per cent or how many grains in a gallon of water is sufficient to injure health?—J. B.

11.—Slack Coal and Saw Dust.—At our saw mill, coal is used under the boiler; and upon exposure to weather, it slacks and, unavoidably, we have much coal dust, and of course we have much saw dust to spare. Is there any way to utilize them, and so reduce the cost of our fuel? A way that would not be very expensive—all the machinery and parts of the process being of home manufacture—is needed.—J. F. T.

12.—Metal Lining in Cast Iron Vessels.—How can I prevent the lining metal in cast iron boxes from becoming loose? After they have run some time, the lining becomes loose, and I have to refill them. Would tinning the boxes prevent the metal from getting loose? If so, what would be the best process to tin boxes that are cast on the frame so that they cannot be removed The lining metal used is Babbitt's metal, *minus* the antimony.—W. A.

# Business and Personal.

*The Charge for Insertion under this head is One Dollar a Line. If the Notices exceed Four Lines, One Dollar and a Half per Line will be charged.*


The paper that meets the eye of manufacturers throughout the United States—Boston Bulletin, $4 00 a year. Advertisements 17c. a line.

For the most beautiful Site, Building, and Water Power for manufacturing purposes, address Harris Brothers, Newport, N. Y.

Sewing machines of any shape and adapted to any special purpose. Models, patterns, and experimental machinery made from crude description on paper or word of mouth. References as to integrity and capacity to any extent furnished when required. Koch & Brass, 59 Scholes Street, Williamsburgh, N. Y.

Wanted—Descriptive price list and catalogue of *new* and second hand fire engines, hose carts, and hose. Ad. Trost, Neb. City, Neb.

For Machinists' Tools and Supplies of every description, address Kelly, Howell & Ludwig, 917 Market Street, Philadelphia, Pa.

Stencil Tools, full set, $5. Circulars free. J. T. Lee, Warrenton, Ga.

Safety Boiler—Wanted party with manufacturing facilities to take interest. G. Morgan Eldridge, 703 Walnut St., Philadelphia, Pa.

Wanted—A man who thoroughly understands how to Finish Harness and Roller Buckles and to make the Dies which form the Tongues. Good wages and steady employment. For further particulars, address with name and residence to B. K. Murphy, cor. 28th St. & 7th Av., New York.

Three fourths saving of fuel, by the Ellis Vapor Engine (Bisulphide of Carbon) in running the Haskins Machine Co's Works, Fitchburg, Mass. To whom apply.

State Patents for Sale—Black's Improved Fertilizer, made on the farm at comparatively small outlay of cost and labor. For circular, terms, &c., address G. R. Black & Co., Box D., Donaldsville, G. & C R. R., S. C.

Wanted—Situation as Mechanical Draftsman. One in the West preferred. Specimen work shown and references given. Address Box 299, Yellow Springs, Green Co., Ohio.

Old Furniture Factory for Sale. A. B., care Jones Scale Works, Binghamton, N. Y.

A Great Curiosity. See advertisement on page 421.

The Patent Vertical Portable Engine—Safer than the Safest—Wear and Tear, none. Power Plenty. Light on Fuel. Griffith & Wedge, Zanesville, Ohio.

The Best Saw Mill in the Market—with Cut Gear Lever Head Blocks and Handshy's Patent Roller Set—makes more and truer Lumber, with less hands to the Mill, than any other Circular Saw Mill in the country. Griffith & Wedge, Zanesville, Ohio.

Stationary Engines—25 Horse Power—for Saw or Grist Mills, ready to ship. Address Griffith & Wedge, Zanesville, Ohio.

Wood Cutting by Electricity—Communications on this subject can be addressed to the patentee, G. Robinson, Box 2622, Post Office, New York.

Write for Chemicals, Crude Materials, and Drugs for Manufacturers' use, to L. & J. W. Feuchtwanger, 55 Cedar Street, New York.

Steel Castings to pattern, strong and tough. Can be forged and tempered. Address Collins & Co., 212 Water street, New York.

The Waters Perfect Steam Engine Governor is manufactured by the Haskins Machine Co., Fitchburgh, Mass.

Wanted—A first class Sewing Machine Repairer. T. Shanks, Baltimore, Md.

Galvanized Slating Nails, Stove Reservoirs, and Hollow Ware. Address Cleveland Galvanizing Works, Cleveland, Ohio.

Second hand Iron Planer, to plane 9 feet long, 33 inches wide—good as new and cheap. Chas. Place & Co., 60 Vesey St., New York.

Wanted—A partner in the Machinist and Foundry business, well established at Minneapolis, Minn. Address Chas. M. Hardenbergh.

Portable Baths. Address Portable Bath Co., Sag Harbor, N.Y.

Standard Twist Drills, every size, in lots from one drill to 10,000, at ⅓ manufacturer's price. Sample and circular mailed for 25c. Hamilton E. Towle, 30 Cortlandt st., New York.

The Shive Steam Engine Governor—Guaranteed to be the best in the world. Circulars sent free. Shive Governor Company, 12th and Buttonwood Streets, Philadelphia, Pa.

For the best Foot Power Jig Saw, address Goodnow & Wightman, 23 Cornhill, Boston, Mass.

For hand fire engines, address Rumsey & Co., Seneca Falls, N.Y.

T. Shaw's Steam Gauges, Ridge av. & Wood st., Phila., Pa.

If you want a perfect motor, buy the Baxter Steam Engine.

Brown's Coalyard Quarry & Contractors' Apparatus for hoisting and conveying material by iron cable. W. D. Andrews & Bro, 414 Water st., N.Y.

Mining, Wrecking, Pumping, Drainage, or Irrigating Machinery, for sale or rent. See advertisement, Andrew's Patent, inside page.

For Tri-nitroglycerin, insulated wire, exploders, with pamphlet, as used in the Hoosac Tunnel, send to Geo. M. Mowbray, North Adams, Mass.

All kinds of Presses and Dies. Bliss & Williams, successors to Mays & Bliss, 118 to 122 Plymouth St., Brooklyn. Send for Catalogue.

For Steam Fire Engines, address R. J. Gould, Newark, N. J.

Presses, Dies, and Tinners' Tools. Conor & Mays, late Mays & Bliss. 4 to 8 Water st., opposite Fulton Ferry, Brooklyn, N.Y.

In the Wakefield Earth Closet are combined Health, Cleanliness and Comfort. Send to 36 Dey St., New York, for descriptive pamphlet.

If you want to know all about the Baxter Engine, address Wm. D. Russell, office of the Baxter Steam Engine Co., 18 Park Place, N.Y.

T. Shaw's Blast Gauges, Ridge av. & Wood st., Phila., Pa.

Presses, Dies & all can tools. Ferracute Mch Wks, Bridgeton, N.J. Also 2-Spindle axial Drills, for Castors, Screw and Trunk Pulleys, &c.

The Patna Brand of Page's Patent Lacing is the best. Orders promptly filled by the Page Belting Co., No. 1 Federal St., Boston.

Absolutely the best protection against Fire—Babcock Extinguisher. F. W. Farwell, Secretary, 407 Broadway, New York.

For the best Galvanized Iron Cornice Machines in the United States, address Calvin Carr & Co., Cleveland, Ohio.

Tested Machinery Oils—Kelley's Patent Sperm Oil, $1 gallon; Engine Oil, 75 cts.; Filtered Rock Lubricating Oil, 75 cts. Send for certificates. 116 Maiden Lane, New York.

Kelley's Chemical Metallic Paints, $1, $1·50, $2 per gallon, mixed ready for use. Send for cards of colors, &c., 116 Maiden Lane, N.Y.

Kelley's Pat. Petroleum Linseed Oil 50c. gal., 116 Maiden Lane.

Peck's Patent Drop Press. Milo Peck & Co., New Haven, Ct.

The "Bellis Patent Governor," made by Sinker Davis & Co., of Indianapolis, Ind., is acknowledged to be the most perfect engine regulator now in use.

Persons in want of Portable or Stationary Steam Engines, or Circular Saw Mills combining the latest improvements, should correspond with Sinker Davis & Co., of Indianapolis, Ind.

For 2, 4, 6 & 8 H.P. Engines, address Twiss Bro., New Haven, Ct.

Derricks built by R. H. Allen & Co., New York and Brooklyn.

"Anti Lamina" will clean and keep clean Steam Boilers. No injury to iron. Five years' use. J. J. Allen, Philadelphia, Pa.

Williamson's Road Steamer and Steam Plow, with Rubber Tires. Address D. D. Williamson, 32 Broadway, N. Y., or Box 1809.

For the best Recording Steam and Indicating Gauges, address The Recording Steam Gauge Co., 91 Liberty Street, New York.

For Solid Wrought-iron Beams, etc., see advertisement. Address Union Iron Mills, Pittsburgh, Pa., for lithograph, etc.

Belting as is Belting—Best Philadelphia Oak Tanned. C. W Arny, 301 and 303 Cherry Street, Philadelphia, Pa.

Boynton's Lightning Saws. The genuine $500 challenge. Will cut five times as fast as an ax. A 6 foot cross cut and buck saw, $6. E. M. Boynton, 80 Beekman Street, New York, Sole Proprietor.

The Baxter Steam Engine is safe, and pays no extra Insurance.

An inducement.—Free Rent for three months to tenants with good business, in commodious factory just built for encouragement manufacturing. Very light rooms, with steam, gas, and water pipes, power elevator, &c. &c. Manufacturers' Corporate Association, Westfield, Mass. Plans of Building, Room 22, Twenty One Park Row, N. Y.

To Ascertain where there will be a demand for new Machinery, mechanics, or manufacturers' supplies, see Manufacturing News of United States in Boston Commercial Bulletin. Terms $4.00 a year.

Millstone Dressing Diamond Machine—Simple, effective, durable. For description of the above see Scientific American, Nov. 27th 1869. Also, Glazier's Diamonds John Dickinson, 64 Nassau st., N. Y.

T. Shaw's Hydraulic Gauges, Ridge av. & Wood st., Phila, Pa.

Better than the Best—Davis' Patent Recording Steam Gauge Simple and Cheap. New York Steam Gauge Co., 46 Cortlandt St., N. Y.

Rights for Sale—Of the only Patent out on Stove Pipe Fitters. Address Wm. Volk, 32 Staats Street, Buffalo, N. Y.

What I know about Machinery, especially Engines, Pumps, and Machinists' Tools, which I sell at 93 Liberty Street, New York. S. N. Hartwell, late agent for L. W. Pond.

The most economical Engine, from 2 to 10 H.P., is the Baxter

Over 800 different style Pumps for Tanners, Paper Makers, Fire Purposes, etc. Send for Catalogue. Rumsey & Co., Seneca Falls, N. Y.

Alb. Lovie, 729 N. 3rd St., Philadelphia, Pa., Electro Plater. Platina Plating a Specialty.

Partner wanted for an Invention of most importance and profit. Address: A. D., No. 2141 North 4th St., Philadelphia, Pa.


# Recent American and Foreign Patents.

*Under this heading we shall publish weekly notes of some of the more prominent home and foreign patents.*

Medical Compound.—John Frechette, of Chicago, Ill.—This invention furnishes an improved medical compound or tonic bitters for invigorating the system when reduced or weakened by sickness. In preparing the compound are taken one pound of orange peel, three quarters of a pound of calamus, one quarter of a pound of ginger, one quarter of a pound of bayberry bark, and four lemons. These ingredients are ground and put into two gallons of pure spirits, diluted to not less than seventy-five per cent of spirits. The compound is allowed to stand for thirty-six hours in a warm place, and is then reduced to forty per cent of spirits, sweetened to taste with crushed sugar sirup, and filtered. It is then ready for bottling for use or for market.

Velvet Reel.—Peder Jürgens, of St. Paul, Minn.—This invention consists of a pair of oval or cylindrical blocks of wood and another block, of square or other form, placed between them, with a wide board attached to each end of the blocks so as to form a reel. On this reel, velvet ribbon is wound by fastening one end to a pin in the central block and whirling the reel on a pivot at the lower side which may be placed on the counter. The reel is whirled by a handle or key affixed to the upper side, and the pin is so placed in the central block that it will not penetrate the layers of ribbon as they are wound on.

Rotary Puddling Furnace.—Joseph Davies, of Knoxville, Tenn.—In this invention, the revolving puddling furnace is mounted on rollers and rotated in the ordinary manner; it has a large central opening at one side to receive the fire from the combustion chamber, to which it is closely fitted, and another opening on the other side discharging into the flue which leads to the chimney. A flat puddling table is placed upon one part of the interior wall of this puddling furnace, with a hole through the side of the cylinder, arranged in such relation to the table as to allow of balling the metal on it in small balls adapted to be worked into blooms in the squeezer at one operation, the same as it is balled in the stationary furnace. A passage through the flue provides for removing the balls.

Dog for Saw Mill.—Denison Chase, of Orange, Mass.—This invention relates to apparatus used in saw mills for holding logs to be sawed. The dog consists of a bed plate fixed to a head block, to which is attached a slotted upright, against which the log rests when partly sawed. In rear of the upright is a stand or round bar which carries the dog proper. This stand is attached rigidly to the bed plate, and the dog is fitted to it so that it will slide up and down on it. In either direction from the central sleeve of the dog are two arms, each furnished with a claw or finger for entering the log. The dog slides up and down in the slot of the upright, and when not in use is raised above the upright and turned round out of the way.

Hydrostatic Safety Lamp.—Hampton S. Whitfield, of Tuscaloosa, Ala.—This invention relates to that class of well known lamps where the oil is forced up by another liquid. The body of the lamp consists of an upper reservoir, a lower reservoir, and a connecting neck or partition. The neck has two holes formed through it, one to receive a pipe which extends nearly to the bottom of the lower reservoir, and the other to receive a flattened tube which extends up to the top of the upper reservoir, and which is designed to receive the elongated flattened wick tube attached to an ordinary burner. The lower end of the tube projects a little below the bottom of the neck or partition that separates the upper and lower reservoirs, so that there will always be a stratum of air in the upper part of the lower reservoir which cannot escape, and which keeps the oil from penetrating the partition.

Spring Bed Bottom.—Donald McMurchy, of Jeffersonville, Ind.—This invention furnishes an improved spring bed bottom, simple in construction, effective in operation, and durable. The posts, side rails, and end rails of the bedstead are as ordinarily constructed. To the inner sides of the end rails are attached bars in which are formed notches or sockets to receive the ends of spring slats. Each spring slat is placed between and connected with two slide slats which should also be elastic. The side slats are made of such a length that when pressed downward their ends come in contact with and rest upon the bars. Various appliances, which cannot be explained in detail, are added to keep the slats in position. With this construction, should the central spring slats become permanently bent or set they may be removed and reversed, making the bed bottom again as good as new; light weights will be supported by the elasticity of the central slats, but heavy weights will bring the ends of the side slats into contact with the bars, so that the weight will be supported by the elasticity of the three slats, the bed bottom being thus equally easy and elastic, whether supporting light or heavy weights.

## NEW PATENT LAW IN CANADA.

By the terms of the new patent law of Canada (taking effect September 1st, 1872) patents are to be granted in Canada to American citizens on the most favorable terms.

The patent may be taken out either for five years (government fee $20), or for ten years (government fee $40) or for fifteen years (government fee $60). The five and ten year patents may be extended to the term of fifteen years. The formalities for extension are simple and not expensive.

In order to apply for a patent in Canada the applicant must furnish a model, specification and duplicate drawings, substantially the same as in applying for an American patent.

American inventions, even if already patented in this country, can be patented in Canada provided the American patent is not more than one year old.

All persons who desire to take out patents in Canada are requested to communicate with Munn & Co., 37 Park Row, N. Y., who will give prompt attention to the business and furnish pamphlets of instruction free.

Messrs. Munn & Co., have had twenty-five years experience in the business of obtaining American and Foreign Patents for inventors; they have special agencies in nearly all countries where patents are granted. Moderate charges and prompt attention may always be expected.

MUNN & CO., 37 Park Row, N. Y.

© 1872 SCIENTIFIC AMERICAN, INC

[OFFICIAL.]

# Index of Inventions

## For which Letters Patent of the United States were granted

FOR THE WEEK ENDING JUNE 11, 1872, AND EACH

BEARING THAT DATE.

Acid, apparatus for generating carbonic, L. Kimball ... 127,893
Agricultural implements, disk for, E. T. Bussell ... 127,677
Annunciator, electric, J. B. Shannon ... 127,931
Awning, W. Matthews ... 127,781
Barometer, Emery and Johnson ... 127,752
Bed bottom, spring, E. Krieghoff, (reissue) ... 4,940
Bedstead fastening, T. W. Moore ... 127,786
Bedstead fastening, S. Jones ... 127,694
Bedstead, hammock, J. M. Kilner ... 127,892
Bell ringer, steam, G. B. Snow ... 127,933
Beverage and sirup from mustang grapes, J. C. Wood ... 127,944
Billiard table, portable, E. Hunt ... 127,886
Blind, metal clad wooden, W. E. Brock ... 127,736
Boat, canal, Muller, Schwaab, and Krenson ... 127,911
Boat, canal, B. T. Babbitt ... 127,826
Bolt, self heading, B. B. G. Stone ... 127,934
Boiler, feed water regulator and low water alarm for, W. Painter ... 127,917
Book binder's clamp, G. F. Holland ... 127,882
Boot and shoe heeling machine, bed plate for, C. L. Frye ... 127,861
Boot and shoe nailing machine, W. N. Linnell ... 127,779
Boots and shoes, burnishing shanks for, Blanchard, Hunt, and Carey ... 127,888
Boots and shoes, burnishing machine for, J. H. Howard ... 127,772
Boots and shoes, machine for burnishing the edges of, J. W. Maloy ... 127,904
Bottles, cork fastening for, J. Conner ... 127,851
Box, metallic, I. C. Mayo ... 127,782
Boxes, etc., manufacture of, J. Trottier ... 127,811
Bracket for warp creels, W. Welch ... 127,816
Bridge, R. L. Partridge ... 127,791
Broom and brush holder, G. B. Cunningham ... 127,743
Buggy top, Turner and Shimanaur ... 127,715
Buildings, apparatus for moving, W. N. Hemenway ... 127,766
Bureau, wardrobe, J. H. F. Lehmann ... 127,778
Burner, vapor, S. Rust ... 127,711
Burners, light intensifying attachment for gas, S. T. Bacon ... 127,829
Bustle, J. I Barnum ... 127,832
Butter tub and cooler, Connelly and Benjamin ... 127,742
Butteris, blacksmith's, J. H. Rhamy ... 127,708
Button hole cutter, C. E. Bean ... 127,835
Camphor, preparing crude for preserving furs, etc., W. F. Simes ... 127,807
Car axle, J. H. Dinsmore ... 127,857
Car axle, M. P. Hadley ... 127,868
Car coupling, S. G. Northrop ... 127,790
Car coupling, F. L. Kirkbride ... 127,894
Car, draw bar iron for buffers of, J. T. Wilson ... 127,819
Car spring, J. Anderson ... 127,672
Carriage, circles for, E. Wilson ... 127,818
Carriage curtain fastener, T. D. Marsh ... 127,780
Carriage, folding double steps for, J. Pendergast ... 127,707
Carriage running gear, W. Hemme ... 127,767
Carriage wheels, hub for, A. Allcott ... 127,823
Case for ribbons, velvets, etc., S. Whitaker ... 127,722
Caster, E. G. Gory ... 127,862
Caster bottle, C. Casper ... 127,740
Chair, spring rocking, P. C. Ingersoll ... 127,888
Chair, iron folding, J. Lauer ... 127,899
Churn, A. G. Crane ... 127,852
Cigar, Turley and Innes ... 127,939
Cigar mold, B. Hawkins ... 127,764
Cloth, stretching and drying, P. Hild, deceased ... 127,691
Cloth, machine for sizing, stretching, and drying, W. Bailey ... 127,731
Clothes dryer, J. O. Hill ... 127,881
Clothes pin, R. Emerson ... 127,751
Culinary utensils, S. Lee ... 127,900
Cultivator, J. H. Brinton, (reissue) ... 4,939
Cultivator, A. Merrill ... 127,785
Cultivator, J. C. Stowe ... 127,935
Cultivator, G. Bradley ... 127,674
Cultivator, A. Friberg ... 127,757
Cultivator, rotary, M. Decelle ... 127,746
Desk, school, W. Blackburn ... 127,839
Desk and seats, school, Upham and Kline ... 127,940
Digger, potato, D. C. Thomas ... 127,937
Digger, potato, D. D. T. Brown ... 127,676
Distilling fresh from salt water, A. M. King ... 127,797
Divider, H. Gerecke ... 127,686
Door hanger, sliding, C. B. Clark ... 127,846
Drilling machine, rock, A. J. Severance ... 127,712
Electrical apparatus, pole changers for, J. E. Smith ... 127,809
Electromagnetic motor, J. Taggart ... 127,810
Engine, oscillating, W. Sellers ... 127,928
Engine, power indicator for steam, Ashton and Storey ... 127,729
Engine, rotary, J. C. Wilson ... 129,943
Engine, apparatus for operating steam, J. Donnelly ... 127,747
Excavating machine, S. Achenbach ... 127,671
Fabric, felted, E. Waite ... 127,813
Fare box, J. B. Slawson ... 127,808
Fare box, portable, J. S. Hagerty ... 127,869
Fastener, shutter, C. S. Van Wagoner ... 127,941
Faucet, N. Hotz ... 127,883
Fence post, H. N. Dunbar ... 127,749
File cutting machine, J. E. Crisp ... 127,854
Filter and cooler, water, L. Scharff ... 127,926
Filter, F. J. Delker ... 127,681
Fire arm, breech loading, A. Burgess ... 127,737
Fire arm, breech loading, W. C. and P. T. Dodge ... 127,683
Fire extinguisher, C. T. Holloway ... 127,770
Flour bolt feeder, J. Boehm ... 127,673
Furnace for kilns, O. Bennett ... 127,886
Furnace, hot air, E. D. Norcross ... 127,913
Furnace, glass, C. W. and F. Siemens ... 127,806
Garment, pantaloon, G. R. Eager ... 127,750
Gas bracket, lamp stand, etc., self sustaining, C. Robb ... 127,798
Gas purifier, screens for coal, G. W. Day ... 127,856
Gate, railway, Kristie and Horn ... 127,775
Gage, pressure, T. C. Hargrave ... 127,874
Generator, steam, I. N. Wilfong ... 127,724
Grain cleaner, J. H. De Force ... 127,680
Grate, fire place, M. Ohmer ... 127,916
Grate, stove, Ransom and Burton ... 127,795
Grate, stove, W. Doyle ... 127,684
Gun, spring, W. W. Hannah ... 127,873
Hammer, drop, J. E. Crisp ... 127,853
Harness, tug for, N. Botsford ... 127,840
Harvester, Lomont and Grojean, (reissue) ... 4,944
Harvester, C. Wheeler, Jr., (reissue) ... 4,955, 4,946
Heater, base burning fire place, Bibb and Augee, (reisue) ... 4,941
Heater, steam, S. Williams ... 127,817
Hoisting apparatus, W. C. Williamson ... 127,726
Hoisting apparatus, D. A. Noble ... 127,789
Horse power, W. G. Halbert ... 127,768
Horseshoe, A. W. Smith ... 127,932
Horseshoe calks, detachable, J. E. Byers ... 127,843
Horse, head protector for, W. H. Wilson ... 127,820
Horse, device for moistening the legs of, G. J. Harris ... 127,875
Horses from whiffletrees, disengaging, J. B. Goldsmith ... 127,760
Husking machine, corn, J. Russell ... 127,801
Hydrocarbon, vaporizing and burning, S. J. Whiting ... 127,723
Journal box, G. R. Meneely ... 127,784
Lamp chimney cleaner, A. A. Ford ... 127,754
Lamp, street, J. S. Fish ... 127,685
Latch, knob, C. M. Jordan ... 127,773
Latch, reversible, J. Hamill ... 127,870
Lathe, turning, W. Sellers ... 127,929
Leather slicker, G. B. Fowle ... 127,756
Lock, combination, G. H. Peacock ... 127,706
Lounge bed, H. Closterman ... 127,741
Lounge, bed, C. H. Hildreth ... 127,693
Medical compound, J. W. Ward ... 127,719
Medical compound, P. Roskopf ... 127,925
Medical compound and disinfectant, J. Walton ... 127,814
Meter, liquid, H. S. Maxim ... 127,907
Meter, water, Wheeler and Lane ... 127,942
Milk cans, clasp for securing the covers to, Ransom and Smith ... 127,794
Milk, apparatus for purifying, Schermerhorn and Perry ... 127,802
Milk cooler, Kuster and Marzolf ... 127,898
Mill, fanning, A. Niebel ... 127,912
Mill pick, F. Kortick ... 127,744
Motion, mechanism for producing rotary, C. E. De Loriere ... 127,682
Movement, mechanical, M. S. Davis ... 127,853
Mowing machine, B. Atwood ... 127,730
Net for horses, tail, Parsons and Parker ... 127,918
Netting, machine for cutting leatner fly, T. Tullp ... 127,716
Ore washer, L. M. Gochnauer ... 127,688
Oyster nursery, B. F. Lyford ... 127,903
Packing, metallic piston rod, C. S. Barry ... 127,834
Packing, piston, C. S. Barry ... 127,838
Packing, rubber, C. L. Frink, (reissue) ... 4,942
Padlock, B. Kensler ... 127,695
Padlock, G. L. Chamberlin ... 127,678
Paper, etc., sizing, stretching, and coloring, P. Hild, deceased ... 127,692
Paper, etc., sizing, J. M. Dorlan ... 128,857
Pavement, block for, F. A. Luckenbach ... 127,699
Photograph mounting, A. C. Platt ... 127,920
Photograph mount, A. C. Partridge ... 127,705
Pianos, clamp for moving, D. Benson ... 127,837
Plane, bench, J. Brooks ... 127,842
Planter, corn, G. Thompson ... 127,938
Planter, corn, S. H. Hamilton ... 127,877
Planter, hand corn, H. Lage ... 127,696
Plow, M. L. Gibbs (reissue) ... 4,943
Plow, W. Haslup ... 127,878
Plow wheel, L. C. Bristol ... 127,734
Pocket, safety, S. Chittenden ... 127,845
Power, animal, H. Rosamyer, Jr ... 127,800
Printing boot tops, etc., revolving support for, A. P. Nash ... 127,702
Printing press, E. A. Warren ... 127,815
Projectile, J. Rigney ... 127,796
Propeller, Miller and Priester ... 127,709
Pruning shears, P. Broadbooks ... 127,735
Pulley, griping, A. S. Hallidie ... 127,690
Pulley block, differential, C. Hall ... 127,689
Pump, oil well, A. S. Hill ... 127,880
Rack, lumber, W. H. Powers ... 127,921
Rail and tramway automatically, operating, C. W. Hunt ... 127,885
Railway, construction of, W. S. Morrow ... 127,910
Railway, machine for removing snow from, G. Sewell ... 127,930
Railway rail and chair, W. Foster ... 127,850
Railway switch, W. W. Gelatt ... 127,759
Rake, horse hay, J. Harris ... 127,876
Refrigerator, C. O. Peck ... 127,919
Refrigerator, ice box for, J. Gravenstine ... 127,762
Refrigerator, J. Gravenstine ... 127,863, 127,864
Rifle barrel, M. S. Colvin ... 127,849
Roller, land, J. F. Glidden ... 127,687
Rolling mill, relief apparatus for, J. Sullivan ... 127,714
Roofing machine, C. B. Koons ... 127,896
Rubber, covering tubular fabrics with, Bates and Faulkner ... 127,733
Sash holder, E. P. Masterson ... 127,906
Saw mill, circular, A. Talbott ... 127,936
Saw set, J. Garman ... 127,758
Sawing machine, W. W. Le Grande ... 127,697
Sawing machine, mitering attachment for, A. Aitkin ... 127,728
Scalding apparatus, F. G. Chesman ... 127,679
Scissors, guide for, W. H. S. Lawrence ... 127,777
Scissors sharpener, W. C. McGill ... 127,783
Screw cutting die, S. W. Putnam, Jr ... 127,793
Seat for halls, churches, etc., J. L. Kapple ... 127,891
Separator, grain, M. T. Nesbitt ... 127,788
Separator, grain, G. S. and H. Nutter ... 127,915
Separator, middlings, E. Yeagly ... 127,727
Sewing machine, fly wheel for, G. Roberts ... 127,799
Sewing machine, hemmers for, D. Barnum ... 127,732
Sewing machine, E. Braundbeck ... 127,675
Sewing machine, W. Heidenthal ... 127,765
Sewing machine, C. Gullmann ... 127,867
Ship and boat, steam, B. T. Babbitt ... 127,825
Shoe fastenings, J. R. Cluxton ... 127,847
Shutter, fireproof, F. Schumann ... 127,803
Shuttle box actuating mechanism, Brierly and Brierly ... 127,841
Shuttle binder actuating mechanism, H. H. Law ... 127,776
Sideboard and extension table, Goodnow and French ... 127,761
Signal, street car, J. C. Harris ... 127,877
Sifter, coal, W. Shelly ... 127,805
Sifter, coal, L. T. Newell ... 127,703
Sleigh shoe, molds for casting and chilling, V. A. Butman ... 127,738
Soap, liquid, J. Leetch ... 127,901
Soap, manufacture of, B. T. Babbitt ... 127,828
Soap under pressure, process for boiling, B. T. Babbitt ... 127,827
Soldering iron, N. G. Numsen ... 127,914
Spinning machine, G. Draper ... 127,748
Stone, artificial, W. W. Reeves ... 127,923
Stove pipe coupling, J. T. McKim ... 127,908
Stove, oven door for cooking, S. S. Utter ... 127,718
Stove, magazine for heating, W. A. Greene ... 127,865
Stove, tailor's heating, J. R. Groves ... 127,866
Stove, heating, J. F. Baldwin ... 127,880
Switch stand, Meeker and Kearney ... 127,700
Table, dining, B. Welteck ... 127,720
Table, ironing, J. T. Plowman, Sr ... 127,792
Telegraph, district and fire alarm, E. A. Calahan ... 127,844
Thrashing machine, G. B. Hamlin ... 127,872
Thrashing machine, dust conveyer for, J. B. Hunsberger ... 127,884
Tobacco, machine for packing, D. Eaton ... 127,859
Toys, J. Schwennesen ... 127,927
Transplanter, B. Shirley ... 127,713
Trap, Welty and Bollinger ... 127,721
Trap, animal, L. Meyer ... 127,701
Trap, animal, L. E. Ingersoll ... 127,887
Trap, casting water, P. Nayler ... 127,787
Trap, hog, H. W. Hill ... 127,769
Truck, stone, G. A. Davidson ... 127,744
Truck and hoist, combined, H. Kruse ... 127,897
Truss, N. Jones ... 127,889, 127,890
Tubing, manufacture of, J. B. Forsyth ... 127,755
Twine or thread cutting machine, C. Higby ... 127,879
Vehicle, axle box for, C. Ahrenbeck ... 127,821
Vehicles, wheel for, S. Atha ... 127,824
Vehicles, wheel for, S. Atha (reissue) ... 4,938
Vinegar, apparatus for the manufacture of, R. D. Turner ... 127,812
Wafer iron, G. W. Mason ... 127,905
Wagon wheel, J. Priest ... 127,922
Wall, constructing hollow, F. Collin ... 127,848
Washstand, E. E. B. Low ... 127,698
Washing machine, Riggs and Parsons ... 197,709
Washing machine, J. Klein ... 127,895
Watch, stem winding and setting, E. C. Fitch ... 127,753
Water elevator, E Deaver ... 127,745
Water pipe, stop valve for, J. L. Hewes ... 127,768
Water pipe, waste, Conver and Koons ... 127,850
Weather strip for doors, Robbins and Minuse ... 127,924
Well boring machine, J. F. Rupp ... 127,710
Whiffletree, attachment for, J. T. Williams ... 127,725
Whiffletree fastening, C. Ahrenbeck ... 127,822
Wind wheel, W. I. Tustin ... 127,717
Wind wheel, J. J. Hosey ... 127,771
Wind wheel and gearing, G. S. Oberdorff ... 127,704
Wood to be varnished, filling, F. Seabury ... 127,804
Wrench, dynamometer, H. R. Leonard ... 127,902
Wringer, clothes, C. H. Bangs ... 127,831
Writing machine, type, E. Cadmus ... 127,739

## EXTENSIONS REFUSED.

20,447.—WHITEWASH BRUSH.—D. W. Shaw, W. Magraw.
20,492.—PLATFORM SCALES.—J. F. Keeler.
20,515.—HARVESTING MACHINE.—W. H. Seymour, D. S. Morgan.
20,522.—GRAIN SEPARATOR.—A. J. Vandegrift.

## DISCLAIMERS.

20,503.—BREECH LOADING FIRE ARM..—G. W. Morse.
2,182, whole No. 33,186.—THRASHING MACHINE.—D. M. Cochrane.

## DESIGNS PATENTED.

5,911.—CARPET.—T. Barclay, Lowell, Mass.
5,912 to 5,916.—CARPETS.—R. R. Campbell, Lowell, Mass.
5,917.—CARD BASKET.—G. D. Dudley, Lowell, Mass.
5,918.—VASE.—N. L. Glauber, A. Schlank, New York city.
5,919.—CAMPAIGN BADGE.—E. W. Harrison, Jersey city, N. J.
5,921.—CARPET.—L. Jullien, Passy, France.
5,922.—CARPET.—C. S. Lilley, Lowell, Mass.
5,923.—CARPET.—D. McNair. Lowell, Mass.
5,924.—TRUNK CORNER CLAMP.—W. Bruen, Newark, N. J.
5,925.—BUCKET.—H. Everett, Philadelphia, Pa.
5,926.—PICKLE STAND AND BOTTLE.—G. Gill, Taunton, Mass.
5,927.—BADGE.—J. Hartman, Jr., Ormsby, Pa.
5,958.—FIREPLACE STOVE.—W. J. Keep, Troy, N. Y.
5,929.—HEATING STOVE.—W. J. Keep, Troy, N. Y.
5,930.—HEATING STOVE.—E. Mingay, Boston, Mass.
5,931.—TOY CARRIAGE BODY.—F. W. Porter, Springfield, Vt.
5,932.—OIL CLOTH.—V. E. Meyer, Lyon's Farms, Elizabeth, N. J.
5,933.—COOKING STOVE.—F. H. Root, Buffalo, N. Y.
5,934 and 5,935.—HOT AIR REGISTER.—E. A. Tuttle, New York city.
5,936.—STOVE.—N. S. Vedder, Troy, T. S. Heister, Lansingburgh, N. Y.

## TRADE MARKS REGISTERED.

852.—WINES AND LIQUORS.—A. W. Balch & Co., New York city.
853.—PRESERVED FISH.—J. H. Doxsee, Islip, N. Y.
854 and 855.—BRANDY.—J. Hennessy & Co., Cognac, France.
856.—BISCUITS AND CRACKERS.—J. B. Kupfer, Kenosha, Wis.
857.—SALVE.—M. A. Paullin, Philadelphia, Pa.
858.—CRUSHED WHITE WHEAT.—F. E. Smith & Co., Brooklyn, N. Y.
859.—POLISH FOR METALS.—F. J. Tibkham, New York city.
860.—ELASTIC WEBBING.—J. Twamley, New York city.

## APPLICATIONS FOR EXTENSIONS.

Applications have been duly filed, and are now pending, for the extension of the following Letters Patent. Hearings upon the respective applications are appointed for the days hereinafter mentioned:

15,693.—LINKS OF HORSE POWERS.—A. W. Gray. August 21, 1872.
21,352.—RAILROAD CAR SEATS.—C. M. Mann. August 14, 1872.
21,416.—COFFEE ROASTER.—T. Heermans. August 21, 1872.
21,436.—RAILROAD CAR COUCH.—F. R. Myers, F. H. Furniss.—August 21, 1872.
21,443.—MACHINE FOR TURNING HUBS.—A. Richart. August 21, 1872.
21,465.—SEWING MACHINE.—S. C. Blodgett. August 21, 1872.
21,474.—JOURNAL BOX.—H. H. Thayer. August 21, 1872.
21,541.—PIN STICKING MACHINE.—C. W. Van Vliet. August 28, 1872.
21,828.—FURNACE FOR TEMPERING STEEL.—P. G. Gardiner. October 2, 1872.


## FOREIGN PATENTS---A HINT TO PATENTEES.

It is generally much better to apply for foreign patents simultaneously with the application in the United States. If this cannot be conveniently done, as little time as possible should be lost after the patent is issued, as the laws in some foreign countries allow patents to any who first make the application, and in this way many inventors are deprived of valid patents for their own inventions. It should also be borne in mind that a patent is issued in England to the first *introducer*, without regard to the rights of the *real* inventor; therefore, it is important that all applications should be entrusted to responsible agents in this country, who can assure parties that their valuable inventions will not be misappropriated. The population of Great Britain is 31,000,000; of France, 37,000,000; Belgium, 5,000,000; Austria 36,000,000; Prussia, 40,000,000; and Russia, 70,000,000. Patents may be secured by American citizens in all of these countries. Mechanical improvements of all kinds are always in demand in Europe. There will never be a better time than the present to take patents abroad. We have reliable business connections with the principal capitals of Europe. A large share of all the patents secured in foreign countries by Americans are obtained through our Agency. Address

**MUNN & CO.,**
**37 Park Row, N. Y.**

☞ Circulars, with full information on foreign patents, furnished free.

## Value of Extended Patents.

Did patentees realize the fact that their inventions are likely to be more productive of profit during the seven years of extension than the first full term for which their patents were granted, we think more would avail themselves of the extension privilege. Patents granted prior to 1861 may be extended for seven years, for the benefit of the inventor, or of his heirs in case of the decease of the former, by due application to the Patent Office, ninety days before the termination of the patent. The extended time inures to the benefit of the inventor, the assignees under the first term having no rights under the extension, except by special agreement. The Government fee for an extension is $100, and it is necessary that good professional service be obtained to conduct the business before the Patent Office. Full information as to extensions may be had by addressing

**MUNN & CO., 37 Park Row**

# PATENTS.

MUNN & CO. continue to give opinions in regard to the Novelty of Inventions, free of charge; make special Examinations at the Patent Office, prepare Specifications, Drawings, Caveats, and Assignments; and prosecute applications for Letters Patent at Washington, and in all European countries. They give special attention to the prosecution of Rejected Claims, Appeals, Extensions, and Interferences.

☞ Pamphlet of the New Patent Law for 1870 furnished free. Address

**MUNN & CO.,**
**37 Park Row, New York.**


© 1872 SCIENTIFIC AMERICAN, INC

# INDEX.

## ILLUSTRATIONS.


### A

Agassiz, Professor Louis..... 1
Agitator at Pratt's oil works..... 341
Air compressors, the Mont Cenis tunnel..... 63
Air pump, free piston, Delenil's . 51
Alarm, high pressure, Jewell and Steele's..... 127
Arsenic by Marsh's test, precipitation of, by J. C. Draper..... 195
Arsenic, magnesium in Marsh's test for, by J. C. Draper..... 179
Arsenic, quantitative determination of..... 211
Auger, earth boring, Jiliz's ..... 214

### B

Barrel room at Pratt's oil works 338
Battery, a new and simple continuous..... 364
Battery, electric, Himmer's ..... 198
Bearing, self lubricating box and shaft, Grosvenor's..... 375
Bed bottom, adjustable spring, Brownlee's..... 242
Bell pull and bell, Swan's ..... 366
Bending printers' leads and rules, machine for, Smith and McCollum's..... 207
Bit braces, attachment for, Whitus' 322
Blacking and brush holder, Sweetzer's..... 322
Bleaching pans at Pratt's oil works 339
Blind wiring machine, Nelson and Whitman's..... 6
Boiler experiments at Sandy Hook 50
Bone setting ..... 382
Bootjack, pocket, Brown's..... 306
Brake, wagon, Gerhart's..... 118
Brick making machine, portable, Winn's ..... 158
Bricks, geometrical arching, Quimby's..... 118
Bridge over the Mississippi at Brainerd, Minn..... 191
Bridge, suspension truss, Diedrich's..... 375
Bridle bit, pulley, Barnes'..... 326
Burette, Durand's..... 398

### C

Caliber compass, Koch's..... 115
Canal boat, mode of propelling, Hein's..... 306
Can, oil, Pratt's..... 338
Caps for infants, crocheted, Love's 131
Car door..... 194
Chopper, meat, Patton's..... 147
Chromosphere, history and discovery of the..... 227, 243
Closets, earth, Goux's..... 3
Cloth-s rack, Miller's..... 166
Cloth measuring machine, Miller's 150
Coffee and grain dryer, Guardiola's..... 391
Comb, renewable tooth, Johnson's 210
Comet, Encke's..... 3
Condensers at Pratt's oil works.. 339
Cooper shop at Pratt's oil works. 338
Copying press, electrochemical, Zuccato's..... 347
Corn sheller, Patch's..... 291
Cotton seed hulling machine, Kahnweiler's..... 134
Cotton tie, Sheppard's ..... 2
Counterbalancing gang saws and other machinery..... 195
Crystallization of silver, gold, and other metals ..... 411
Curiosity, a Patent Office..... 227
Cutter head molding machine, Hope Machine Co.'s..... 347

### D

Dividing engine, Woodward's.... 67
Dovetail and shaping machine, Pennell and Zimmer's ..... 94
Drilling machines, Thorne and De Haven's..... 343

### E

Elevator, fireman's and builder's, Patrick's..... 262
Emery wheels, strengthening..... 382
Engine, combined steam and bisulphide of carbon, Ellis'.. ... 31
Engine, rotary steam, Massey's .. 294
Engines, rotary..... 147, 194
Engine, steam, Greene's..... 303
Exposition building, New Orleans 290
Extinguisher, fire, Gardner's..... 291

### F

Fastener, door, Melendy's..... 214
Fastenings for neck ties, etc., Wicks'..... 242
Faucet, Pratt's..... 341
Fence, portable, Landis'..... 226
Fireshield, Rieger's ..... 350
Flying ship, steam ..... 319
Fungus, parasitic..... 347
Furnace, hot air, Holcomb's..... 278

### G

Gage cock for steam boilers, Painter's..... 118
Galvancmeter, vertical balance.. 395
Gas burner, Cremin's..... 150
Gasoline still at Pratt's oil works 338
Gate, farm, Decker's ..... 379
Gearing, frictional..... 259, 275
Gruers, combined cast iron and wrought iron..... 243
Governor, safety, Lynde's..... 19
Grafting tool, Maddy's ..... 262
Grain weigher, automatic, Pooley's 31
Greenhouse, interior of a..... 178
Growth in plants, increasing the vigor of..... 364
Guano at the Chincha islands. .... 323
Guard, moustache, Randolph's. .. 210
Gun battery, Gatling's..... 143, 144
Gunpowder pressure gages..... 394

### H

Halyards, method of securing flag, Albert's..... 99
Hat, ventilating, Heard's..... 243
Heat and light, Professor Tyndall on..... 363, 378
Heat by melting ice, determination of high degrees of..... 195
Heater for greenhouses, hot water 3
Hold back for carriages, Simons' 134
Horse power, mounted, Harrisons' 110
Hydromotor for ships' pumps and other purposes, Baudouin's... 307

### I

Ice boating on the Hudson river 86
Ice harvesting on the Hudson river ..... 102, 114
Ice machine, Johnston and Whitelaw's ..... 398
ce, water, vapor, and air, Professor Tyndall on ..... 83, 394
Insulators, testing telegraph, Schwendler's mode of..... 380
Iron and steel posts, Gunn's..... 99

### J

Japan, scientific commission of.. 47
Jupiter, the planet..... 211

### K

Kenwood Tower, Highgate, near London..... 66
Key, fastening, Homrighous'..... 282
Kiln, brick, Brewer's ..... 326
Kiln, brick, Hawley's ..... 271
Knife sharpening machine, Union Stone Company's..... 6

### L

Ladder, extension, Millener's.... 179
Lamp, kerosene ..... 410
Leather, machine for boarding, pebbling and glossing, Coogan's..... 319
Library and Museum, City of London..... 346
Loading vessels at Pratt's oil works..... 339

### M

Magneto-electric machine..... 410
Mattress stuffing machine, Watson's..... 350
Metal cutter, Bunker's..... 398
Mill, portable spring grist, Reed and Buckingham's..... 223
Mill step, Marsh's ..... 382
Mont Cenis Railway—The Comba Scura bridge..... 162
Moon, the attraction of the..... 35
Morse, Professor ..... 258
Museum at South Kensington, London, England..... 130

### N

Needle sharpener, Currier and Philpott's..... 54

### O

Observatory, the Alleghany..... 34
Oil from wool, removing, Deiss' process ..... 98
Oil, tools used in boring for..... 342
Oil works, Pratt's..... 335

### P

Packing room at Pratt's oil works 339
Palette, reservoir ..... 347
Pavement, wood, Flanigan's..... 63
Pestle for hulling coffee, rice, etc., Guardiola's..... 391
Philosophical Institution and Library, Bristol, England..... 18
Phosphoric light..... 99
Piano truck, French's ..... 414
Pitman connection, Ketchum's.. 198
Pivot, expansive, Motz's ..... 322
Power hammer, dead stroke, Shaw and Justice's ..... 82
Press, oil spring printing, Cottrell's 407
Press, Myers'..... 278
Projectile for fire arms, Jones'... 178
Projectile for fire arms, Maduell's 366
Propelling canal boats, method of, Good win's ..... 239
Pump room at Pratt's oil works.. 338
Punching press and drop press, the Stiles and Parker Press Company's..... 287

### R

Rabble, revolving, Dormoy's..... 379
Rail straightener, railway, Kinsel's 359
Railway, elevated, Gilbert's..... 246
Reel, clothes line, Staffin's..... 259
Refrigerator, dynamic, Toselli's.. 398
Regulator and heat economizer, draft, Twitchell's..... ... 310
Repair shop at Pratt's oil works.. 338
Resawing machine, Schenck's.... 146
Riveting device, Allison's..... 382
Road steamer, Fitts'..... 79
Roof of the depot at Saratoga Springs, fall of the..... 115, 163
Rope railway, Muller's..... 274
Running room at Pratt's oil works 339

### S

Saw clamp, Baldwin's..... 70
Saw filing machine, Chapman's.. 182
Saw, foot power buzz, Fithian's.. 366
Sawing, boring, and planing machine, Weaver's..... 414
Sawing machine, spiral spring scroll, Beach's..... 214
Scissors, button hole cutter, and tracer, Franklin's..... 166
Screw wood, Wills'..... 387
Seed for sowing, coloring, Clausen's system..... 131
Sewing machine, Beckwith's.. 70, 166
Shampooing apparatus, Winn's.. 262
Ship ventilator, fog alarm, and bilge pump, Thiers'..... 15
Shoe fastenings, Triscott and Wheelers'..... 146
Sidewalk, endless travelling or railway, Speer's ..... 255
Signal light, inextinguishable, Holmes'..... 243
Signals, new device for railway.. 395
Sky, measuring the clearness of the..... 259
Solar prominence, changes in a.. 179
Spark catcher and consumer, Beach's..... 198
Stanchion, automatic, Gifford's.. 290
Stand, tea and coffee pot, Currier's 231
Stave jointing apparatus, Palmer's 227
Steamer *Egypt*, the National Steamship Company's ..... 362
Stereometrical tableau, Baillargé's 359
Sterhydraulic apparatus, Desgoffe and Ollivier's..... 38
Stills at Pratt's oil works..... 341
Stool, gardener's, Whittlesey's... 306
Stopper, bottle, Wright's..... 211
Striking bag, Kehoe's..... 230
Surface blower, Davis and Hardester's ..... 191
Suspenders, self adjusting, Bartholomew's..... 22

### T

Tap faucet shop at Pratt's oil works..... 338
Testing machine, Colt's armory.. 175
Testing machine, Riehle Bro.'s... 207
Thill coupling, Bridgeman's..... 6
Tin shop at Pratt's oil works..... 341
Towage on canals, means of, Fowler's..... 22
Transmitting rotary motion at angles, Tufron's method of.. 82
Trap for sewage and drainage reservoirs, self acting, Couzen's. 230
Twine cutter, Lewis'..... 38

### V

Valve, pump, Teague's..... 275
Vise, eccentric spring..... 2

### W

Wagon wheel, Anderegg's..... 194
Water gate, Peet's ..... 310
Water wheel governor, Walsh's.. 182
Wheel, pit car, Peart's ..... 382
Whiffletree, Gibbs' ..... 262
Wire rope way, Hallidie's... .... 195


## MISCELLANY.

Figures preceded by a *Star* (*) refer to illustrated articles.


### A

Absorption by the bones ..... 325
Absorption of solid matter by animal tissues..... 352
Accident at Muncy, Ind..... 110
Accouching garment ..... 104
Acoustic experiment ..... 398
Addition to the dinner table, a novel..... 105
Adhesion to rubber belts..... 313
Adjustable cut off valve..... 58
Adjustable umbrella holder for carriages ..... 75
*Adriatic*, the..... 305
Adulterations ..... 331
Advertisers, to..... 209
Advertising albums ..... 42
Advertising, a new dodge in..... 153
Advice, good practical..... 134
Æolian harp ..... 330
Aeronautics ..... 353
Agassiz at Pernambuco, Professor 168
Agassiz expedition, the..... 245
Agassiz, lecture at sea by Professor ..... 101
Agassiz, Professor Louis..... *1
Agricultural chemistry and chemical manures..... 120
Agricultural implements, trial of. 398
Agricultural works..... 240
Air blower..... 123
Air, ice, water, and vapor, Professor Tyndall on..... *83, *394
Air, impurities in the..... 414
Air in wells, foul ..... 186
Air locomotives, compressed..... 310
Air pre sure and suction..... 122
Air pump, free piston..... *51
Air, pure..... 56
Air supplying attachment for stoves..... 107
Air we breathe, the..... 393
Alarm, improved high pressure.. *127
Albumen ..... 106
Albuminous substances, structure of the ..... 230
Alchemists, our obligations to the Arabian..... 327
Alcoholized subjects, putrefaction in..... 307
Alcohol, obtaining absolute..... 184
Ale, acidulation of ..... 386
Ales, brewing light..... 186
Allo , a new..... 21
Alloys for bells, gongs, cymbals, etc..... 377
Alloys, gold and platinum..... 67
Alloys of copper and zinc..... 384
Alloys, preparation and composition of ..... 53
Alloys, the study of..... 40
Amalgamating ores..... 43
Amalgamation of ores of the precious metals, the..... 168
Amalgamator ..... 171
American Historical Record, the. 53
American homesteads..... 152
American inventions in Europe.. 400
American petroleum, history of.. 336
American sailors as firemen..... 376
American women deteriorating? are the..... 37
Ammonia as a cure for snake bites 73
Ammonia, detection of..... 262
Ammonia, uses of..... 210
Ampère's theory ..... 27
Amusement..... 181
Anatomical specimens, to preserve..... 8
Ancient proverb..... 51
Andirons..... 355
Anemometer, a new ..... 246
Aniline colors..... 359
Animal poke..... 59
Animal power..... 314
Animal trap..... 10, 156, 201, 262
Annealing lamp chimneys ..... 42
Anti-concussion water cock..... 202
Antimony, poisoning by..... 39
Ants and moles..... 233
Ants on peach trees..... 229
Ants, to destroy..... 233
Anvils ..... 349
Aphangoscope, the..... 21
Apparatus for closing barrels and casks ..... 75
Apparatus for distilling spirits.... 42
Apparatus for elevating and immersing vessels..... 370
Apparatus for feeding white lead, etc..... 10
Apparatus for leveling millstones 299
Apparatus for lighting gas by electricity ..... 75
Apparatus for mixing soap..... 314
Apparatus for preserving and forcing beer ..... 11
Apparatus for producing plane and parallel movement..... 75
Apparatus for raising dough..... 299
Apparatus for supplying locomotive tenders with fuel..... 370
Apparatus for supporting and lowering coffins..... 11
Apparatus for temporarily increasing the pressure in gas pipes ..... 371
Apparatus for tracing drawings, etc..... 250
Apparatus for transmitting motion ..... 75
Apparatus for transporting vessels over bars..... 282
Appian way, the..... 186
Application..... 277
Aquaria, water in..... 217, 246
Architect, the Government ... 393
Architectural competition in Berlin..... 89
Arctic regions, the..... 175
"Argento" picture, the..... 181
Armored can ..... 370
Armor plates, English..... 165
Armor plating, elastic backing for 196
Arsenic by heat in Marsh's test, precipitation of..... *195
Arsenic, easy tests for..... 225
Arsenic in paper hangings, etc., detection of..... 105
Arsenic, magnesium in Marsh's test for..... *179
Arsenic, the Marsh test for..... 352
Arsenic, the quantitative determination of..... 211
Art, a lost.—Glass cloth..... 276
Art and Nature..... 352
Artesian wells and malarial fevers..... 296
Artesian wells, our need for..... 377
Artificial stone ..... 313
Artificial stone and fireproof buildings ..... 7
Artificial teeth and dental plates. 123
Artillery and small arms, European field ..... 112
Art industry, American..... 183
Art progress..... 380
Arts of design, museums of the.... 215
Art to industry, the relations of—Museums of the arts of design. 215
Asbestos packing ..... 201
Asbestos piston rod packing..... 113
Asbestos wall paper..... 229
Ash sifter..... 371
Asiatic railroad, an..... 194
Asphalte pavements and roadways ..... 347
Asphaltum, melting..... 233, 249
Assignments..... 85
Astral oil works ..... *340
Astronomical instrument, a new. 38
Astronomy, progress of—The variable stars..... 295
Atlantic ocean, the..... 134
Atlantic to the Pacific, from the.. 392
Atmospheric and pneumatic propulsion ..... 328
Atmospheric engine..... 234
Atomic weights, on the reasons which have caused the adoption of the new..... 280
Attaching knobs to their spindles 387
Attaching shoes to sleigh runners 314
Attachment for sewing machine.. 11
Auger, earth boring ..... *214
Aurine ..... 81
Australian locomotives ..... 240
Automatic fan..... 202
Automatic registers..... 116
Awning frame..... 331
Awning slide..... 201
Axle ..... 387
Axle lubricator..... 299

### B

Baby walker..... 37
Back braces..... 234
Back pressure..... 138
Back pressure in exhaust pipe .... 42
Bag holder..... 171, 387
Bag string inserter..... 402
Bail dredge ..... 75
Bails for kettles, etc ..... 201
Balanced slide valve..... 371
Balancing gang saw mills..... 281
Balancing saws and cylinders, etc ..... 261
Bale band stretcher..... 171
Bale tie..... 59, 299
Baling cotton, etc..... 314
Baling press..... 75, 299, 370
Ballasting vessels in port..... 402
Balloon, a navigable..... 192
Balloons, anchoring..... 32
Balloon, the *Colossus*..... 367
Band cutting fork ..... 331
Band for House's telegraph, coloring..... 122
Band saw gang ..... 387
Band saw mill..... 330
Barbers' and dentists' chair ..... 250
Base burning cooking stove..... 59
Bats ..... 330
Batteries, galvanic..... 209
Batteries, nature of the action in galvanic..... 393
Batteries, relative value of galvanic..... 25
Batteries, secondary ..... 380
Battery, a cheap continuous..... 368
Battery, a new and simple continuous ..... *364
Battery, electric..... *193
Battery for plating..... 266
Battery, Grove's..... 370
Battery, modification of Leclanche's galvanic..... 25
Battery power..... 9
Bayonets, making..... 240
Bearing, self lubricating box and shaft..... *375
Beater press..... 218
Bed bottom, adjustable spring.... *242
Bedding gun locks ..... 208
Bedding gun stocks ..... 208
Bedding gun triggers and guards. 208
Beef essence, frozen..... 308
Beef tea, meat extracts and..... 130
Bee hive..... 42, 171, 298
Beer forcing apparatus..... 155
Bees..... 242
Bees in winter ..... 9, 27
Beet leaves fodder, preparation of..... 381
Beetle from Mississippi..... 354
Beetles..... 361
Beet root sugar in Massachusetts 121
Beet root sugar in the United States ..... 167
Beet sugar..... 368
Beet sugar in Illinois ..... 321
Beet sugar in the United States.. 264
Bell pull and bell..... *366
Belt fastener..... 10
Belting and pulleys..... 277
Belting, leather..... 9, 42
Belts in wet weather..... 90
Belts, tightening of ..... 58
Belt tightener ..... 123, 282
Bending gas pipe ..... 122
Bending printers' leads and rules, machine for..... *207
Benefits of exchange of goods ... 51
Bengal signal light ..... 370
Benzole and benzine..... 181
Benzole and benzine, the difference between ..... 136
Berry box ..... 298
Beveled joints, cutting..... 27
Bible, revision of the..... 180
Bicycle travelling..... 290
Binder for sewing machine..... 10
Bin for storing and drying grain. 155
Biniodide of mercury in solution.. 27
Birds, antiquity of ..... 345
Bird skins, preserving..... 313
Biscuit manufacture ..... 309
Bisulphide of carbon, boiling point of..... 130
Bit brace..... 107
Bit braces, attachment for..... *323
Bitumen of Judea paper..... 321
Black and Caspian seas, junction of the..... 207
Blackboard..... 351
Black coating for covering metallic utensils..... 208
Blacking ..... 72
Blacking and brush holder... 267, *322
Blacking box ..... 122
Black specks in vision..... 200
Blasting ice..... 81
Bleaching ..... 98
Bleaching ivory..... 122
Blessings ..... 68
Blinders for horses..... 555
Blind stop ..... 59
Blind wiring machine..... *6
Blood crystals..... 242
Blood, test for human..... 8
Blood, to purify the..... 35
Blowing out boilers..... 233
Blueing iron ..... 107
Boat detaching apparatus..... 234
Boat racing, the laws of..... 325
Bob sled..... 234
Boiler deposits ..... 136
Boiler experiments, proposed Government..... 347
Boiler explosion at Manchester, England ..... 393
Boiler explosions..... 397
Boiler explosions, fatal..... 384
Boiler feed ..... 138
Boiler inspection law, Baltimore.. 242
Boilers, blowing out steam..... 298
Boilers, cleansing..... 298
Boilers, evaporative power of steam ..... 50
Boilers, extraordinary experiments on steam..... *50
Boilers, on the heating of water and—Curious explosive phenomena..... 272
Boilers, production of steam in.. 103
Boiler, the Blanchard ..... 292
Bolt and nut threading machine.. 43
Bolt fastening for fish plates..... 250
Bolt threading machine..... 387
Bone dust, adulteration of..... 129
Bone dust as a fertilizer..... 343
Bones and bone meal..... 241
Bone setting..... *382
Books ..... 245
Boot blacking machine..... 139
Boot clamp for base ball players. 91
Boot crimping machine..... 139
Boot for horses..... 371
Boot jack, pocket..... *306
Boot strap machines..... 313
Borax ..... 197
Borax in Nevada ..... 149
Borax, new method of making.. 401
Boring for oil ..... *342
Boring for petroleum..... 337
Boring machine..... 282
Boston firemen ..... 105
Boston flats, South ..... 384
Botany, the study of..... 56
Bottle capping machine..... 387
Bow..... 387
Box for Seidlitz powders ..... 75
Boys, a word to ..... 224
Brace chain..... 202
Brake for railway cars..... 267
Brake lock for wagons..... 267
Brake shoe..... 202
Brakes, railway power..... 175
Brandy from wood shavings..... 389
Brass castings..... 281
Brass colored paint..... 233
Brass founding..... 249
Bread cutter..... 371
Bread making, new process for.... 69
Breakwaters..... 57
Breast pin..... 13
Breech loading fire arm. .... 219, 330
Breezes, land and sea..... 9
Brewers, hints to..... 85
Brewing interests of the United States, the..... 408
Brick machine..... 27, 171
Brick machine, improved portable..... *159
Bricks, geometrical arching..... *118
Bricks, wire cut..... 365
Brick work and masonry..... 409
Bridge..... 282
Bridge at Albany, new railway ..... 101, 397
Bridge at Rock Island, Mississippi 100
Bridge, Housatonic river..... 101
Bridge, Illinois and St. Louis..... 57
Bridge over the Mississippi, at Brainerd, Minn..... *191
Bridges, ancient..... 164
Bridges of Europe, the..... 164
Bridges, truss..... 164
Bridge, suspension truss ..... *375
Bridle..... 313
Bridle bit, pulley..... *326
Broad cast seed sower..... 202
Broiler..... 218
Bromine..... 132
Bromine water as a test for phenol (carbolic acid)..... 240
Bronze paint..... 58, 90
Bronzing gun barrels..... 217
Bronzing iron..... 53
Broom..... 202
Broom head..... 11
Browning gun barrels..... 266
Brown tint for iron and steel 105, 224
Brush..... 59
Brush for applying blacking to boots and shoes..... 186
Brussels, engineering in..... 351
Buckle..... 10, 234
Buckskin leather and glove making..... 196
Buffalo robes..... 266
Bug buster..... 397
Buggy top..... 201
Building blocks..... 150
Building, inventions and patents connected with..... 161
Building material, a new..... 148
Buildings at South Kensington, England, lecture theater..... *130
Bung attachment to barrels..... 27
Bung inserter..... 59
Burette ..... *398
Burial case..... 11
Burning fluids, testing..... 414
Burns, oakum as a dressing for.... 35
Burnt iron and burnt steel..... 289
Butter ..... 398, 368
Butter, a substitute for..... 89
Butter from California ..... 291
Butter making ..... 53
Butter sacks..... 163
Butter tub..... 74

### C

Cables, Atlantic ..... 278
Cables, Mongols *vs.* deep sea..... 19
Cake stirrer ..... 10
Calculating machine..... 11
Calefaction ..... 69
Calendar ..... 370
Caliber compass ..... *115
Californian estimates ..... 329
Californian fields are plowed, how the..... 397
Californian orchard, a..... 196
Calomel, test for..... 42
Camels in Nevada ..... 105
Canadians, patents for..... 85, 87
Canal boat..... 107, 202, 355, 387
Canal boats, new method of propelling ..... *306
Canal, cable towing on the Erie.. 296
Canal lock..... 402
Canal reward, the great..... 162
Canals, proposed Atlantic and Great Western..... 23
Canals, steam on the New York .. 145
Canals, steam propulsion on.... 260, 382
Canals, steam towage on the..... 22
Canals, steam traction on..... 197
Canal, steam on the Erie..... 264
Canal towage, power required for 348
Cancer, a remedy for..... 5
Cancer, remedies for ..... 325
Candle light, colored ..... 116
Candle to burn all night..... 229
Candy, improvement in the manufacture of..... 137
Cane gun ..... 299
Cane staining..... 74
Canned fruits..... 385
Cannon, a monster..... 413
Caoutchouc, gathering Nicaragua 393
Caoutchouc, mineral..... 197
Cap box ..... 387
Cap for boots and shoes ..... 123
Capitol at Albany, N. Y., the new 413
Caps for infants, crocheted..... *131
Car, a gigantic railway..... 367
Carbolic acid..... 321
Carbolic acid, antidote to..... 137
Carbolic acid as a disinfectant .. 368
Carbonic acid..... 280, 385
Carbonic acid gas in wells.... 128, 185
Carbon plates for battery..... 27
Car brake..... 75, 186
Carbureter ..... 282
Car coupling. 12, 59, 91, 155, 218, 330, 371
Car couplings..... 58
Carding machine..... 299
Car doors ..... 194
Carpeted floors ..... 226
Carpets and knitted manufactures at Amsterdam, N. Y..... 273
Carpets are made, how..... 274
Carpets, machine for cleaning and finishing ..... 277
Carpet stretcher ..... 107
Carriage mountings, new..... 366
Carriage top prop block washer.. 74
Carriage wheel..... 123, 155, 201, 314
Car root..... 250
Car starter ..... 409
Cart body catch..... 330
Car time..... 262
Cartridge box..... 234
Car truck ..... 139
Car ventilation..... 364
Car window..... 186
Case, a queer..... 164
Case hardening process, new..... 293
Cash fare box ..... 218
Casters for furniture..... 155
Casting soled patterns..... 42
Casting pipe ..... 298
Castings, cleaning ..... 138
Cast iron pulleys..... 281
Cast iron with other metals, coating..... 261
Castor oil, coloring..... 298, 313
Cat, a mechanical..... 328
Catching cold..... 245
Cattle poke..... 354
Cedar, white..... 58
Celestial engineering ..... 16
Cement, brick dust ..... 161
Cement, elastic..... 225
Cement for alabaster..... 155, 218
Cement for cast iron..... 170
Cement for fixing glass letters... 348
Cement for iron pipes..... 218
Cement for sheet iron and rubber packing ..... 122
Cement for textile fabrics..... 386
Cement from sewage..... 409
Cement, glycerin ..... 152
Cement, hydraulic..... 155
Cementing emery to wood..... 233
Cementing leather to iron..... 42
Cement, lamp..... 398
Cement, Portland..... 276
Cements and metals in conjunction, behavior of..... 22
Cements, hydraulic—Their adaptability for use and ornamental purposes..... 17, 32
Centenarians..... 127
Center bit..... 314
Centering machine ..... 208
Chains, stretching of..... 409
Chair, easy..... * 54
Chair seat frame..... 10, 402
Chapped hands..... 233
Charger for shot pouches..... 314
Check rein attachment for harnesses..... * 54
Chemical experiments for youthful readers..... 95
Chemical inventions, prizes for.. 214
Chemical manures and agricultural machinery ..... 120
Chemistry, the last six months of. 8
Chicago fire, destruction of scientific collections by the..... 136
Chignon..... 218
Chimes for reed and pipe organs.. 42
Chimney moving..... 242
Chimneys, to prevent the burning of..... 4
Chimney tops..... 11
China, American ideas in..... 328
China and Japan, treaty between. 229
Chinese astronomy..... 70
Chinese by telegraph..... 306
Chinese plumagery..... 225
Chinese temple in San Francisco. 325
Chloral hydrate..... 2
Chloral in toothache..... 2
Chloral, the new stimulant..... 69
Chlorine, evaporation of..... 57
Chloro-acetic acid..... 266
Chloroform, nitrous oxide, etc., the administration of..... 233
Chloroform, robbery with the aid of..... 127
Cholera and sun spots..... 376
Chopper, improved meat..... 147
Chrome iron..... 233
Chromic acid, action of..... 105
Chromium and its compounds in the arts..... 51
Chromosphere, the discovery and history of the..... *227, *243
Chucks of screw cutting lathe.... 139
Church on wheels, a ..... 169
Churn..... 11, 27, 43, 76, 123, 171, 387
Churn and butter worker..... 354
Churn dasher..... 43
Cider from freezing, to prevent .. 281
Cider mill..... 354
Cigar machine..... 123
Cincinnati exposition..... 416
Circles, dividing..... 249
Circular saw mill..... 58
Circular saw, speed of..... 218
Circulation valve..... 402
City subscribers, to..... 8
Clamp for holding timbers..... 42
Clapboarding, improvement in.... 80
Clasp for looping skirts..... 219
Classics, a plea for the..... 412
Class legislation and the working man..... 52
Clays, refractory..... 413
Cleaning castings..... 58
Cleaning glass..... 281
Cleaning instruments..... 370
Cleaning lamp chimneys..... 298
Cleaning paint brushes..... 58
Cleaning watches and clocks..... 98
Cleanliness ..... 35
Cleanliness, labor and personal.. 184
Cleansing hair brushes..... 233
Clipping machine..... 282
Clod fender..... 314
Closets, earth..... * 6
Clothes beater..... 314
Clothes dryer..... 314
Clothes pins, to preserve..... 229
Clothes rack, improved..... *166
Clothes washer..... 11
Clothes wringer..... 58, 202
Clothing when wet, your..... 278
Cloth measuring machine..... *150
Cloth plaiting machine..... 155
Cloth shearing machine..... 59
Coal ..... 53
Coal and petroleum..... 396
Coal and smoke, C. W. Williams on..... 100
Coal, discharging ..... 382
Coal dust, wet..... 266
Coalfo r unhealthy plants..... 375
Coalin Great Britain..... 166
Coal in Sweden ..... 384
Coal in the United States..... 353
Coal oil manufacture..... 336
Coal oil, the first..... 229
Coal scuttle..... 202
Coating cast iron with other metals..... 165, 212
Coating zinc with iron..... 410
Cock ..... 202
Cod liver oil, pulverized solid.... 197
Coffee and grain dryer..... *391
Coffee roaster ..... 91
Coins ..... 217
Coins, worn ..... 249
Coke, hairy ..... 249
Coke, native..... 176
Cold upon iron, the effect of..... 359
Colorado, Middle Park..... 149
Colorado, mining in..... 162
Colorado, narrow gage railway in 160
Color, a new blue..... 352
Coloring seeds for sowing..... *131
Coloring shells..... 233
Colors, fast ..... 233
Colton, Mr. H. E..... 184
Comb..... 139
Combination lock ..... 299
Combined axle box, sand band, and casing..... 91
Combined bureau and washstand 330
Combined bureau, bedstead, book case, etc..... 171
Combined cooking stove and water heater..... 355
Combined friction and ratchet clutch ..... 42
Combined knife and fork cleaner, knife sharpener, and can opener..... 171
Combined latch and lock for sliding doors..... 282
Combined pocket knife and envelope opener..... 123
Combined propeller and fire extinguisher..... 313
Combined scissors, button hole cutter and tracer..... *166
Combined shovel and tongs..... 298
Combined splice and safety hook for ladders..... 282
Combined table, sofa, and bed... 187
Combined tool ..... 43
Combined wardrobe and bedstead 201
Comb, renewable tooth ..... *210
Comb sawing machine..... 218
Combustibility of iron, the..... 325
Comet, a Munchausen ..... 183
Comet hypotheses, the..... 213
Comets, Encke's..... * 3
Composition for coloring leather 267
Composition for covering cigar tips ..... 387
Composition stone..... 314
Compost, a very good..... 277
Compound building blocks..... 171
Compressed atmosphere, experiments in a ..... 329
Concrete building ..... 266
Concrete walls ..... 370
Condensed steam exhaust..... 11
Confection, an excellent..... 256
Conflagration at Jones and Laughlin's works ..... 197
Congress and patent extension cases ..... 151
Congressional library and copyrights..... 20
Conical cylinder, boring ..... 170


© 1872 SCIENTIFIC AMERICAN, INC

Conical stop cock ... 267
Conscience, preserve your ... 69
Constructing buildings ... 123
Construction of rafts ... 218
Construction of walls and ventilation of buildings ... 91
Contentment ... 276
Cooking food below 212° Fah ... 163
Cooking vessel, improved ... 381
Copal, information on ... 383
Copal varnish ... 201
Copper and epidemic cholera ... 73
Copper dip ... 122
Copper dip for iron castings ... 155
Copper in cocoa and chocolate ... 368
Copper salts ... 106
Copper welding ... 73
Copying, new method of ... 178
Copying press, electro-chemical ... *347
Coralline, solvent for ... 391
Cork and cork cutting ... 397
Corn cribs ... 234
Corn grater ... 355
Corn harvester ... 74
Corn husker ... 171
Corn husking and shelling machine ... 201
Corn planter ... 10, 76, 250, 282, 355
Corn popper ... 387
Corn sheller ... *291
Corpse preserver ... 218
Corundum in North Carolina ... 248
Cotton and hay press ... 10, 202
Cotton chopper ... 43
Cotton chopper and cultivator ... 282
Cotton planter ... 43, 370
Cotton press ... 76, 91, 218, 219, 355, 387
Cotton seed hulling machine ... *34
Cotton seed oil ... 58
Cotton seeds, on ... 273
Cotton substitutes for hair ... 276
Cotton tie ... * 2
Cotton waste, cleaning ... 330
Cough mixture ... 314
Counterbalancing gang saws ... 261
Counterbalancing saws and other machinery ... 195
Counterfeit bills ... 175
Countersink ... 402
Cover for watch frame ... 91
Cowbell strap ... 43
Cracked flute ... 266
Cracks in iron, stopping ... 233
Crossing the track ... 161
Crow-destroying corn ... 401
Crucible, improved ... 160
Crucibles, new material for ... 70
Crystallization ... 127
Crystallization of honey ... 106
Crystallization of iron and steel ... 105
Crystallization of silver, gold, and other metals ... *411
Cucumber, new variety of ... 385
Culinary boiler ... 187
Cultivating plow ... 155
Cultivator ... 171, 330, 402
Cultivator plow ... 354
Cupola furnace ... 385
Cupro-ammonium ... 256
Curculio on plums ... 321
Curiosity, a wonderful ... 112
Curious experiment, a ... 69
Currant worm, the ... 347
Cushion for the feet in railway travel, air ... 160
Cushions, new stuffing for ... 226
Cut off for water pipes ... 201
Cut off, proportions of ... 74
Cutter heads, molding ... *347

D

Damper for fire place ... 402
Dandelion or taraxacum ... 262
Dandruff, a simple remedy for ... 69
Darwinian theory, Beecher on the ... 353
Davenport brothers, expose of the tricks of the ... 37, 68, 100
Davenport tricks again, the ... 148
Davenport tricks, the ... 84, 115
Dead Sea, the ... 245
Deaf and dumb, the education of the ... 103
Decomposition of water by heat ... 8
Demagnetizing steel ... 249, 266
Denmark, iron shipbuilding in ... 307
Dental forceps ... 42
Dental plugger ... 298
Dental purposes, preparing gold for ... 18
Design patents ... 85
Destruction, the coming ... 213
Detachable lamp collar and safety tube ... 267
Detector for coffins ... 6
Device for forming letters on the circumference of metal disks ... 267
Device for locking nuts ... 186
Device for moving pianos ... 123
Device for utilizing power at railway stations ... 91
Dextrin ... 259
Diamond cutting in New York ... 241
Diamond drill ... 224
Diamond fields of South Africa, the ... 414
Diamond in its matrix, the ... 349
Diamonds ... 132
Diamonds, African—An invention wanted ... 231
Die for shaping tea kettle bails ... 331
Discolored glass ... 233
Disease, the communication of ... 105
Dish drainer ... 219
Dish washer ... 402
Disinfectants ... 321
Disinfectants, simple ... 177
Disinfection, city ... 165, 219
Disintegrating machinery ... 161
Dissociation, latent heat of ... 21
Distancing competitors ... 68
Distillation, improvement in fractional ... 400
Ditching machine ... 107, 202
Dividing engine, a ... *67
Diving in mines ... 213
Diving rod for wells ... 298
Dog for saw mill ... 416
Door check ... 355, 371
Door fastener ... *214
Door spring ... 331
Double derrick ... 59
Dough mixer ... 171
Dovetail and shaping machine ... *95
Do your own thinking ... 19
Draft attachment to plows ... 402
Dragon, the flying ... 291
Drawing knife ... 123
Draw, teach the children to ... 55
Dress goods holder ... 267
Dressing for goods ... 105
Drilling machines, portable ... *343
Drills, core retainer for tubular rock ... 22
Drivingbit ... 387
Drop leaf attachment for sewing machine tables ... 186
Dropping attachment for harvesters ... 186
Drop press and punching press ... *287
Drunkenness, dangerous case of ... 307
Dryer, fruit ... 22
Drying by chemical action ... 311
Drying by cold ... 103
Drying by the direct application of heat—Distillation ... 263
Drying substances by hot air ... 167
Drying substances by mechanical action ... 295
Drying substances by steam ... 151
Dust in factories, metallic ... 184
Dyeing black silk ... 89
Dyeing cotton yarn with magenta ... 325
Dyeing leather ... 242
Dyeing on wool and silk, scarlet ... 410
Dyeing, the chemistry of ... 293
Dyeing veneers ... 380
Dyeing wool ... 105

E

Earth auger ... 402
Earth closet ... 107, 250
Ear, the educated ... 67
Earthquakes, the cause of ... 348
Earthquakes, the use of ... 230
Earth scraper ... 27, 29
Eaves trough supporter ... 26
Ebonizing wood ... 346
Eclipse, December, 1871, the solar ... 88
Eclipse observations, American solar ... 161
Eclipse of December, 1871, the ... 161
Eclipse of the sun in 1875 ... 242
Eclipse of the sun in 1878 ... 242
Eclipse, the recent ... 121
Edge tools ... 345
Education of the ear ... 7
Education, technical ... 197
*Egypt*, the steamship ... *362, *364
Elastic lanyard ... 139
Electrical improvements ... 70
Electrical machine, the Holtz ... 229
Electrical resistance, the unit of measure of ... 409
Electrical tubes, luminous ... 345
Electric carriage ... 186
Electric clock ... 116, 202
Electricity and nerve force ... 73
Electricity at Niagara Falls ... 256
Electricity, frictional ... 58
Electricity from evaporation ... 377
Electricity in platinum plates, condensation of ... 400
Electricity in the body ... 266
Electricity, new theory of atmospheric ... 413
Electricity, new use for ... 17
Electricity, surface ... 245
Electric light, the ... 68, 257
Electric probe for wounds ... 225
Electrodeposition of iron ... 386
Electromagnet ... 266
Electromagnetic annunciator ... 186
Electromagnetic engine ... 91, 107, 299
Electromagnetic railroad signal and switch tender ... 123
Electromagnetic telegraph, the ... 199, *257
Electromagnetic telegraph, the—Honor to whom honor is due ... 133
Electroplated jewelry ... 352
Electrotypes of gelatin pictures ... 26
Elevator ... 43, 107, 171, 402
Elevator, driving ... 281, 313
Elevator, fireman's and builder's ... *262
Elevators for private houses ... 99
Elevators, screw ... 331
Embalming the dead ... 81
Emery, coating iron with ... 330
Emery cloth belts ... 266
Emery wheels, strengthening ... *382
Employer and employed—A pleasant incident ... 19
Employment, domestic ... 298
Engine, a monster ... 130
Engineering, incidents in ... 5
Engineering progress, six months of ... 23
Engine, foundation of an ... 266
Engine, improved steam ... *303
Engine, improvement of the ... 401
Engine power for circular saws ... 170
Engine, proportions of ... 107, 138
Engine, rotary steam ... *291
Engine, singular breakdown of an ... 345
Engines, proportions of ... 401
Engines, rotary, 84, 107, *147, *194, 299
Epidemics of disease, disaster, and crime ... 231
Erie canal locks, the, Lockport ... 118
Erratum ... 385
Error ... 71
Etching on glass ... 58
Ether engine ... 117
Ether glue ... 256
Evergreens at Central Park, New York, the ... 382
Excavating cart ... 10
Exhaust of slide valve engines ... 261
Exhibition, London International ... 116, 365
Expansion pivots for wheels of sewing and other machines ... 171
Expert testimony ... 166
Exploders, electrical ... 152
Exploring expedition, the Agassiz ... 40
Explosion, remarkable ... 36
Explosive, a new ... 197
Explosive pills ... 293
Exposition of Louisiana, first Grand Industrial ... 290
Extension cases before Congress ... 153
Extension lathe carrier ... 282
Extensions ... 85
Extension table ... 123, 355
Extension table slide ... 283
Extinguisher, fire ... *291
Extinguisher for street lamps ... 107
Eyes affected by the wind ... 185
Eyes, artists with bad ... 392
Eye stone ... 228, 354
Eye, the ... 344

F

Face worms ... 106, 107, 138
Facing oil stones ... 122, 155, 201
Factories of England—The sufferings of workmen ... 48
Facts and figures—Importance of the latter to substantiate the former ... 88
Fainting ... 232
Fanning mill ... 16, 186
Fare box ... 234
Farm stock, decline in prices of ... 213
Fast colors ... 249
Fastener for meeting rail of sashes ... 201
Fastening for mail bags ... 27
Fastening key for coffins ... 250, * 282
Fastening leather to iron ... 74
Fastenings for neckties, scarfs, etc. ... *242
Feed device for hulling machine ... 43
Feed water heater ... 75
Feed water heater for steam boilers ... 201, 402
Feed water regulator ... 10
Felon arrested by congelation, bone ... 273
Felts, cleansing soapy ... 249
Fence ... 27, 123, 155, 234, 314, 402
Fence, portable ... 226
Fermentation, prevention of ... 9
Fertilizer ... 235, 331, 402
Fibrin, the formation of ... 213
Fifch wheel ... 75
Fifth wheel for carriages ... 11
Fig culture in California ... 178
Fight between a cobra and a mongoose ... 147
File for newspapers, etc ... 11
Files and saws, and their manufacture ... 212
Filters, porous ... 245
Filter, the air ... 279
Finishing furniture ... 313
Fire alarm telegraph, the New York ... 177
Fire arms, the Gatling system of ... *143, *144
Fire at Ithaca ... 377
Fire engine ... 402
Fire engines, floating ... 183
Fire escape ladder ... 234
Fire extinguisher ... 267
Fire extinguisher, portable ... 56
Fire kindler ... 314
Fire kindlings ... 325
Fireplace ... 91, 330
Fireproof building ... 282
Fireproof buildings ... 121, 259, 384
Fireproof buildings, artificial stone and ... 7
Fireproof buildings—Mr. Hiram Powers' views ... 48
Fireproof building—The lesson of Chicago ... 311
Fireproof roof ... 266
Fireproof wood ... 313
Fire shield ... 11, *350
Fires, origin of ... 137
Fires, the forest ... 352
Fish culture in New York ... 66
Fisheries, North Carolina ... 349
Fishing apparatus ... 155
Fishing smack, new ... 413
Fisk, Jr., the late James ... 55
Flag halyards, a ethod of securing ... * 99
Flame, a new sensitive singing ... 349
Flexiblemarble of Wheeling, Va ... 148
Flexible sides for bellows ... 355
Flight, the pigeon's ... 4
Flight, the problem of ... 199
Floating bodies ... 233
Flow of water against atmospheric pressure ... 42
Fluid and liquid ... 233, 266
Fluids, wicks, lamps, imperfection in ... 104
Fluorescence ... 328
Fly fan ... 202
Flying ship, steam ... 319
Fly or not to fly, to ... 5
Fly trap ... 355
Foci, differentiation of ... 310
Fodder, green corn ... 275
Folding bureau ... 75
Folding chair ... 187
Folding chair, lounge, and bed ... 280
Folding table ... 186, 314
Food on poultry and eggs, influence of ... 385
Food, rich ... 227
Force, one primary form of ... 320
Foreign patents ... 85
Forming screw threads in necks of bottles ... 314
Fortifying railway stations ... 57
Fossil sea serpents ... 177
Foundery, a model railway ... 166
Foundery, new type ... 230
Fountain ... 12
Fowl obstruction, a ... 384
Fractional powers of numbers ... 185
Franked circulars ... 182
Franklin statue in Printing House Square, New York city, the ... 70
Freezing ... 350
Freezing by mechanical action ... 81
Freezing, how a man feels when ... 160
Frescoes, portable ... 409
Frictional gearing 227, 229, 244, *259, *275
Friction gear for screw cutting ... 170
Friction gearing *vs.* belts and cog wheels ... 33
Friction matches, substitute for ... 90
Friction of the earth on a plow ... 155
Friction pulleys ... 122
Friction, the coefficient of ... 217
Front gear for carriages ... 387
Frosting glass ... 249
Frost on plants, the effect of ... 289
Frozen water main ... 266
Fruit dryer ... 330
Fruit jar ... 74
Fruit jellies ... 281
Fuel, artificial ... 40
Fuel, Loisgau's compressed ... 41
Fuel, sweetened ... 165
Fungus, remarkable parasitic ... *347
Funnel attachment for liquid measures ... 234
Furnace grate bar ... 283
Furnace, hot air ... *273
Furs, dyeing ... 218
Fuse ... 371
Fusible boiler plug, new ... 292
Fusible metal ... 266, 281
Fusible plugs ... 266

G

Gage cock for steam boilers, improved ... *118
Galvanic action on iron ships ... 411
Galvanized iron pipes ... 370
Galvanized iron pipes, don't use ... 264
Galvanized iron vessels for milk ... 370
Galvanometer, vertical balance ... *395
Gas apparatus ... 250
Gas burner, Cremin's ... *150
Gas Company, the New York Mutual ... 224
Gases, measuring ... 298
Gas from gasoline ... 266
Gas, illuminating—Natural gas wells, etc ... 64
Gas light in brief, history of ... 163
Gas meters ... 305
Gas well, the West Bloomfield ... 96
Gate ... 92, 123, 234
Gate, farm ... *378
Gate for gang saws ... 313
Gate for water wheels ... 218
Gatling system of fire arms, the ... *143, 144
Gearing for saws ... 106
Gearing, frictional 227, 229, 244, *259 *275
Gems, the imitation of ... 225
Generating steam ... 106
*Genie Industriel, Le* ... 121
Geological report for New Jersey ... 212
Germany, the new coinage in ... 137
Germination—Its relation to light ... 361
Germination, process of ... 148
Germ life, action of heat on ... 113
Gig saddle tree ... 139
Gin gearing ... 107
Ginger beer ... 233
Girder for railways ... 234
Girders, cast iron and wrought iron arched ... *243
Giving, the manner of ... 70
Glass cloth—A lost art ... 276
Glass globes or reservoirs for lamps ... 314
Glass, ruby ... 37
Glass, transferring to ... 233
Glass tubes, how to bend ... 97
Gloves ... 11
Glycerin, manufacture and properties of ... 8
Gold and silver in the United States ... 2
Gold and silver ores, iron and copper pyrites in ... 52
Gold and silver, zinc amalgamation for extracting ... 4
Golden ink ... 21
Gold for dental purposes ... 355
Gold in Siberia, discovery of ... 105
Gold ores, amalgamation of ... 260
Gold solution ... 281
Gopher trap ... 123, 186
Governor ... 234
Governor for steam engine ... 10
Governor, improved safety ... *19
Grading and ditching scraper ... 75
Grafting tool ... *262
Grain car ... 11
Grain elevators at Liverpool, the ... 288
Grain *in vacuo*, preservation of ... 393
Grain meter ... 387
Grain screen ... 370
Grain separating attachment to thrashing machine ... 139
Grain separator ... 218, 387
Grain steaming apparatus ... 330
Grain weigher, automatic ... *31
Granite in Finland ... 178
Grape juice, treatment of ... 91
Graphotypes ... 192
Grass cloth ... 265
Gratitude all around ... 146
Gravity of the earth, pendulum experiments for determining ... 35
Greasing cogs of reapers ... 354
Great man, the ... 69
Green colored dresses, etc ... 225
Green colors, beware of ... 225
Green colors in paper hangings, etc ... 225
Green house, interior of a ... *178
Green on cotton, dyeing ... 281
Green, Paris ... 370
Grinding machines ... 314
Grinding mill ... 75
Grinding steel tools ... 138
Grindstone, how to use a ... 112
Grindstones, bursting of ... 152
Grist mill, portable spring ... *223
Grove, Mr. Justice, F. R. S ... 24
Grove on patent laws, Mr ... 25
Growth of plants, increasing the vigor in ... *364
Guano ... 81, *323
Gulf stream and its excess of solid matter accounted for, the color of the ... 180
Gum, mesquite ... 393
Gun band machine ... 208
Gun cotton ... 153
Gun cotton, a new ... 169
Gunmakers' and Inventors' Club, Birmingham ... 304
Gunmaking by machinery ... 208, 294
Gunpowder pressure gages ... *394
Gunpowder, safety ... 122
Gunpowder, substitutes for ... 152
Gun, scattering shot ... 42, 58, 74, 107
Gun, the Gatling battery ... *143, *144
Gutta percha ... 201

H

Hail, salt and iron ... 128
Hair and its substitutes, human ... 278
Hair comes from, where the ... 276
Hair dyes, poisonous ... 210
Hair is ruined, how ... 276
Hair, its value ... 276
Hair, substitutes for ... 276
Hair switch ... 58
Hair trade, extent of the ... 276
Halls and school rooms ... 353
Hammer, the largest steam ... 122
Hams, recipe for curing ... 21
Hand car ... 91
Handle strap for travelling bags ... 371
Hand planter ... 139
Hardening screws ... 90
Hardware, builders' ... 67, 352
Harness buckle ... 107
Harness saddle ... 313
Harrow ... 107, 266, 355
Hartford, Conn., statue of Horace Wells at ... 229
Hartford Steam Boiler Inspection and Insurance Company 4, 129, 178, 245, 305, 392
Harvester ... 58, 156, 171, 186, 203
Harvester cutter ... 75
Harvester rake ... 387
Harvester reel ... 11
Hasp lock for car ... 42
Hat, ventilating ... *243
Hay and clover before they ripen, cut your ... 227
Hay and cotton press ... 10
Hay elevator and carrier ... 402
Hay loader ... 156
Hay mower, etc ... 201
Headache, sick ... 197
Head block for saw mill ... 314
Head rest for car seat ... 58
Health and disease ... 39
Health, keep the body in ... 384
Health, the ... 35, 36
Heart disease, the sexuality of ... 352
Heat and light, Professor Tyndall on ... *363, *378
Heat applied to latent heat, etc., the modern theory of ... 37
Heat by melting ice, determination of high degrees of ... *195
Heat, communication of ... 146
Heat, disinfecting by ... 25
Heater for green houses, hot water ... *3
Heating and cooking range ... 389
Heating and ventilation of buildings ... 71
Heating of buildings by steam, the ... 88, 119
Heating steel articles ... 74
Heating stove ... 235
Heat of combustion ... 184
Heat of vapors and gases, latent ... 5
Hedge trimmer ... 315
Hell Gate, the government works at ... 224
Hemmer for sewing machines ... 10, 59
Hoe ... 282
Hoe socket attachment ... 139
Hoisting apparatus ... 299
Hoisting machine ... 10
Hold back for carriages ... *134
Honey dew ... 368
Hominy mill ... 59
Hoof shears ... 355
Hooks and eyes ... 171
Hops ... 368
Horn, staining ... 336
Horse hay fork ... 201
Horse hay rake ... 43
Horse hoofs, brittleness of ... 186
Horse hoofs, splitting of ... 201, 217
Horse power ... 11, 91
Horse power frame ... 202
Horse power, improved ... *111
Horse shoe ... 123, 171
Horse shoe nail ... 387
Horse shoes by machinery, manufacture of ... 273
Hose couplings ... 75
Hose nozzle ... 299
Hot blast oven ... 250
Hot journal, novel method of indicating ... 396
Hot water pipes against wood work ... 57
House bell ... 59
House building ... 401
Huano manure ... 228
Hub for carriage wheel ... 250, 282
Humility ... 152
Hydrate of chloral, new use of the ... 25
Hydraulic cement ... 417
Hydraulic ram ... 91
Hydrochloric acid ... 49
Hydrofluoric acid ... 413
Hydrofluoric acid on glass, microscopic observation of ... 150, 197
Hydrogen ... 266
Hydrogen gas ... 266
Hydrogen in meteoric iron ... 82
Hydrogen lamp ... 201, 386
Hydrogen the vapor of the metal hyorium ... 215
Hydrogen, volume of ... 122, 155
Hydromotor for ships' pumps and other purposes ... *307
Hydrophobia, cure of ... 349
Hydrostatic safety lamp ... 416
Hydrostatic weighing machine ... 201
Hydrosulphuric acid ... 105
Hygrometer ... 9, 27
Hyponitrous acid ... 321

I

Ice, ammonia machines for producing cold and ... 48
Ice and salt ... 138
Ice at St. Louis, effects of ... 33
Ice boat, how to build an ... 88
Ice boating on the Hudson ... *86
Ice cream holder and filler ... 250
Ice, ether machines for producing cold and ... 48
Ice, freezing powder machines for producing ... 48
Ice harvesting on the Hudson *102, *115
Ice machine ... 355, *398
Ice making machinery, history of ... 47
Ice manufacture in India ... 82
Ice, water, vapor, and air, Professor Tyndall on ... *83, *394
Ignition of explosives ... 197
Ignorance, the stupidity of ... 152
Illuminator ... 370
Illustrating a new invention, result of ... 327
Improvement ... 22
Improvement in corn sheller teeth ... 123
Inadvertence, an abscess cured by ... 229
Indelible ink ... 90, 107
Indians, the Cherokee tribe of, etc ... 412
India rubber, the supply of ... 17
Indicator for elevators, electric ... 6
Indicator padlock ... 218
Indigo, preparation of ... 281
Indigotine by carbolic acid, preparation of ... 410
Indium, the last new metal ... 393
Industry, the relations of art to ... 213
Infants, Woolwich ... 236
Inflammable liquid ... 330
Infringement suit ... 2
Injector, a new ... 292
Ink, black ... 42
Ink stains from paper, removing ... 386
Inkstand ... 123
Inorganic elements, making organic substances from their ... 215
Insanity in France, increase of ... 293
Insect trap ... 202
Institution and Library, Bristol, England, Philosophical ... 18
Instrument for extracting air fruit jars ... 250
Insulation ... 240
Interferences ... 85
Invalid bedstead ... 299
Invention, a new ... 152
Invention not inspiration ... 169
Inventions patented in England by Americans, 12, 26, 43, 60, 76, 92, 108, 124, 140, 156, 170, 187, 203, 219, 236, 248, 267, 281, 300, 315, 332, 339, 388, 402
Inventors, a suggestion to—Value of patented inventions ... 296
Inventors, the United States Senate on compensation to ... 383
Investigators and inventors, a few words of advice and encouragement to ... 367
Iron and steel boiler plates ... 69
Iron and steel, hardening ... 4
Iron and wire railing ... 131
Iron column ... 59
Iron, sulphur and phosphorus in ... 25
Iron, East Indian ... 352
Iron fence ... 202
Iron fence paneling ... 402
Iron freight cars ... 216
Iron, hoop ... 248
Ironing machine ... 91, 201
Iron in water, oxide of ... 272
Iron interest, the ... 266
Iron in water ... 354
Iron manufacture, antiquity of the ... 70
Iron ores, economical use of the phosphorus of ... 25
Iron shipbuilding in Wilmington ... 399
Iron telegraph pole ... 123
Iron, the advance in the price of ... 264
Iron, the future of ... 352
Iron, the price of ... 409

J

Jam while hot, put up your ... 413
Japan ... 116, 150
Japanese carved work ... 377
Japanese metal work ... 349
Japanese native steel ... 136
Japanese porcelain ... 290
Japanese textile art ... 304
Japanned furniture spring ... 43
Japan, scientific commission of ... *47
Japan, treaty between China and ... 229
Jasper and bloodstone ... 322
Javelle water ... 278
Jellies, fruit ... 233
Jelly fish, the ... 128
Jewelry fastenings ... 75
Jubilee, the great musical ... 367
Jupiter, the planet ... *211
Jute to the skin, injury of ... 276

K

Kane on snow, Dr ... 153
Kaolin of the United States, the ... 408
Kenwood Tower, Highgate, near London ... *66
Kerosene oil ... 58
Kiln, improved brick ... 271, *326
Knife cleaner ... 27
Knife cleaner and polisher ... *51
Knife sharpening machine ... *6
Knitted manufactures and carpets in Amsterdam, N. Y ... 272
Knitting machine ... 267
Knives, cleaning ... 240
Know or not to know, to ... 20
Knoxville cave, the ... 118

L

Labor and personal cleanliness ... 184
Laboratories, public ... 84
Labor question, State education and the ... 97
Lac anilines for staining paper, leather, etc ... 410
Ladder ... 234
Ladder, extension ... *179
Lager, Liebigon ... 360
Lake dwellings ... 233
Lamp ... 171, 248
Lamp basket ... 171
Lamp, Doebereiner's ... 298
Lamp, kerosene ... *410
Lamp snuffer and extinguisher ... 371
Lamps, wicks, fluids, imperfections in ... 104
Land roller ... 371
Lard, adulteration of ... 89
Larvæ and animalcuiæ, influence of medicines on ... 32
Latch ... 201
Laughing gas ... 176
Launches, quick steam ... 360
Lawler, Iowa ... 192
Lawns, care of ... 321
Laying shingles ... 123
Leaden water pipes ... 209
Leader bracket ... 201
Lead in water ... 281
Lead in water, test for ... 218
Lead pipe, stopping pinholes in ... 241
Lead poisoning ... 184
Leads, pencil ... 410
Leaky boat ... 313
Leaky roofs ... 170
Learn to do something ... 326
Leather dressing ... 17
Leather, machine for boarding, pebbling, and glossing ... *319
Leather, old ... 329
Leg, the loss of a ... 81
Lenses, liquid ... 401
*Lens*, the ... 152
Let off mechanism ... 10
Letters, short extracts from a few ... 120
Library and Museum, City of London ... *346
Lifting jack ... 218, 371
Light and heat, Professor Tyndall on ... *363
Light and radiant heat, identity of —Lecture by Professor Tyndall ... 176
Light, chemical action of ... 408
Light engines for saw mills 155, 201, 217
Light, heat, and electricity from motion ... 289
Lighting gas by electricity ... 117
Lighting the streets of London ... 384
Lightning ... 381
Lightning conductors and underground pipes ... 294
Lightning rod ... 10
Lightning rods ... 248
Lightning rods with gas and water mains, connect your ... 198
Lightning strokes ... 292
Light, polarized ... 365
Light, velocity of ... 401
Light, waves of sound and ... 211
Lime, artificial water ... 368
Lime kiln ... 92
Lincoln, Nebraska ... 325
Linen substitute for hair ... 276
Lining for furnaces, sates, etc ... 331
Link block for slide valve ... 330
Liquefying sulphur ... 74
Liquid fuel in Russia ... 213
Liquid meter ... 59
Lithographic stone, substitute for ... 306
Liver invigorator ... 107
Live within your means ... 227
Livingstone, an expedition in search of, Dr ... 117
Loading apparatus, car and tender ... 50
Localities for oil wells ... 336
Lock nut ... 355
Locomotive building at Paterson, N. J ... 308
Locomotive cylinders, deposit in ... 313
Locomotives in America, the first ... 24
Log lifter ... 218
Loom ... 139
Loom packing mechanism ... 10
Loom shuttle actuating mechanism ... 282
Low water alarm for steam boiler ... 123
Lubricating axle for vehicle ... 75
Lubricator ... 11
Lubricator for car axles ... 11
Lubricator for steam engine ... 298
Lumber, stacking ... 152
Lungs, expanding the ... 35

M

Machine for blacking boots and shoes ... 10
Machine for boring hubs and tenoning spokes ... 282
Machine for cutting cloth ... 355
Machine for cutting lead ... 299
Machine for cutting staves ... 235
Machine for drying paper, wadding, etc ... 186
Machine for finishing drain tiles ... 402
Machine for finishing horse shoe nails ... 91
Machine for heading bolts ... 75
Machine for jointing staves ... 250
Machine for making chains ... 331
Machine for making cop tubes ... 354
Machine for manufacturing ice cream ... 387
Machine for polishing moldings, etc ... 107
Machine for pressing cotton, hay, etc ... 139
Machine for punching metals ... 171
Machine for sawing fellies ... 387
Machine for sawing marble diagonally ... 42
Machine for shelling peanuts ... 75
Machine for soldering can caps ... 267
Machine for tapping gas and water mains ... 91
Machine for turning logs in saw mills ... 250
Machine for welding ears on springs ... 299
Machine, what is a ... 39
Madstone ... 266
Magnesia ... 293
Magnesium lights in the Hoosac tunnel ... 393
Magnet, charging ... 138
Magnetic needle, the sun's effect on the ... 121
Magnetization ... 354
Magnetization of heat ... 176
Magnetization, sound produced by the molecular motion of ... 105
Magneto-electric machine ... *410
Magnets, thirty tun ... 401
Mails, quick ... 400
Malic acid ... 245
Malleable iron castings ... 211
Man and the lower animals ... 305
Man descended from the crow ... 325
Manufacture of barn forks ... 42
Manufactures, arts, and commerce, the indirect influence of invention upon ... 119
Map and chart racks ... 330
Maple sugar ... 278, 348
Marble dressing and carving machine ... 97
Marble polishing machine ... 107
Marble, the flexible ... 163
Marble, vitrified ... 396
Marine novelty, a ... 117
Marking pot ... 371
Masonry and brickwork ... 409
Master Mechanics' Association, the American ... 40, 328
Mastodon, a gigantic ... 229
Mastodon bones, the ... 381
Mastodon remains ... 111
Matches for molding ... 266
Matter, one primordial form of ... 320
Mattress stuffing machine ... *350
May, rules for ... 292
Measure, unit of ... 386
Measuring the flow of steam ... 313
Mechanical impossibilities ... 215
Mechanical movement ... 11, 43
Mechanics, question in ... 138
Mechanics' unions, folly of ... 50
Mechanism for operating bobbin winding attachments ... 203
Medal of honor, the positive motion loom ... 152
Medical compound ... 416
Medical compound for fever and ague ... 27
Medical compound for hogs ... 299
Medical compound of iodide of iron ... 3
Medical compound or bitters ... 107
Medical or phosphated candles ... 314
Medium in space, a resisting ... 121
Meerschaum ... 73, 90, 193
Melting points of platinum ... 266
Men of progress ... 328
Men's capabilities ... 260
Mercurial column ... 313
Mercuric sulphide ... 197
Mercury by heat, expansion of ... 354
Mercury in thermometer tube, separation of ... 313
Mercury, vapor of ... 69
Metal coated sheet iron ... 361
Metal cutter ... *398
Metal for brake shoes ... 186
Metallic counter for boots and shoes ... 202
Metallic packing for piston rods ... 75
Metallic telegraph poles ... 313
Metalurgy, practical instruction in ... 292
Metals as fuel, burning ... 25
Metals, crystallization of ... 256
Metals, on the colors of ... 16
Meteoric iron in Greenland ... 57
Meteoric stones, velocity of ... 165
Meteorites ... 183
Meteorites, their origin ... 399
Meteorite, the San Gregorio ... 97
Meteorology, its capabilities and its future ... 7
Method of forcing plants ... 250
Method of making harness pads ... 11
Method of manufacturing furniture springs ... 202
Mica lamp chimney ... 91
Microscope, the marvels of the ... 345
Microscopic specimens of nitrate of silver ... 401
Microscopy ... 266
Middle Park, Colorado ... 149
Milk ... 81
Milk, artificial ... 97
Milk cooler ... 186
Milk, effects of electricity on ... 350
Milling gold ores ... 160
Mill step, improved ... *382
Milistone dress ... 59
Milk of diseased cattle ... 400
Milk production and management, Swiss school of ... 393
Mineralogy, cabinets for the study of ... 184
Mineral sperm oil ... 229
Mineral waters ... 33
Miners' boots and shoes ... 234
Miner's squib ... 59
Miners' unions in Prussia ... 411
Mining in California, gravel ... 292
Miscellaneous health notes ... 35
Misfortune ... 65
Mississippi, the upper ... 21
Mitering machine ... 314
Models ... 84
Models, a museum of working ... 309
Models at the Patent Office ... 148, 196
Models at the Patent Office, condition of the ... 100
Models at the Patent Office? what shall be done with the ... 103
Model stand ... 387
Models, the abolition of ... 179
Mode of balancing pulleys ... 12
Mode of constructing straining lever and bale ties for packing bands ... 75
Mode of covering harness mountings ... 75
Molding, to keep gum arabic from ... 289
Moles ... 233
Mole trap ... 354
Money pocket for garments ... 282
Monster of the deep ... 160
Mont Cenis railway—The Comba Scura bridge ... *162
Mont Cenis tunnel air compresser, the ... *63
Month's work, a good ... 121
Moon on timber, influence of the ... 20
Moon, the attraction of the ... *35
Morse, Professor ... *258
Mortar for drying ovens ... 330
Mosaic ... 18
Motion ... 115
Motion at angles from the plane of rotation, transmitting ... *82
Motors for tremolos of musical instruments ... 3
Moustache guard ... *210
Movable wagon stakes and bolster ... 64
Moves, it ... 4
Muck ... 256
Mud ... 5
Mules for spinning, self acting ... 130
Musk, artificial ... 345

N

Nail cutting machine ... 75
Nail extractor ... 387
Nails, machine forged horse shoe ... 147
Naphtha in gas lighting ... 342
Narrow gage ... 144
Narrow gage in the United States ... 307
Narrow gage railway, Colorado ... 160
Nascent hydrogen ... 170
Nature and Art ... 353
Natural history, museum of ... 146
*Naturalistes, La Feuille des Jeunes* ... 57
Nature, convulsions of ... 265
Navigators, news from the ... 117
Navy of the future ... 104
Navy, our rotten and inefficient ... 132
Navy vessels, condition of our ... 52
Neat's foot oil, clarifying ... 74
Nebular hypothesis, the ... 345, 412
Needle accident ... 105
Needle sharpener ... *54
Nevada, silver mining in—A visit to the mines ... 181
Newark, industrial exhibition at ... 401
New books and publications 27, 41, 57, 73, 92, 108, 124, 140, 172, 192, 216, 236, 248, 265, 281, 298, 332, 356, 369, 388
New books in England ... 198
New South Wales, the industrial progress and requirements of ... 368
Newspapers, circulation of ... 113
Newspaper, the oldest daily American ... 53
New York and New Haven Railroad, the ... 348
Nickel plated lead pipe ... 298
Nickel plating ... 65
Nickel plating, improvements in ... 16
Nickel, refined ... 277
Nitrate bath in photography, neutral ... 354
Nitrate of ammonia in respiration ... 222
Nitric acid stains ... 386
Nitric acid, test for ... 217, 233, 281


© 1872 SCIENTIFIC AMERICAN, INC

Nitric acid, the behavior of cadmium, iron, and tin under the action of ..... 184
Nitrogen, available ..... 365
Nitrogen in plants, source of ..... 381
Nitrogen, preparation of ..... 233
Nitro-glycerin ..... 197, 392
Nitro-glycerin, blasting with ..... 224
Nitro-glycerin, gases from the explosion of ..... 8
North Pole, expeditions to the ..... 392
Nurses, a hint to ..... 381
Nurses, fidgety ..... 169
Nut lock ..... 91

O

OBITUARY:
Bennett, James G ..... 400
Cleveland, Charles ..... 413
Corning, Erastus ..... 264
Fisk, Jr., James ..... 55
Gillott, Joseph ..... 51
Johnson, E. F ..... 328
Lyman, J. B ..... 121
Morse, Samuel F. B ..... 247
Morse, Sidney E ..... 21
Prettyman, Perry ..... 397
Shastree, Venaick Gungadhur ..... 353
Treadwell, D ..... 182
Observatory at Allegheny, Pa ..... *35
Odors of plants, the ..... 273
Oil can ..... 22
Oilers for looms, automatic ..... 68
Oil from wool, removal of ..... *98
Oil, mineral sperm ..... 361
Oil regions, physical features of the ..... 336
Oil stones, facing ..... 5, 74
Oil, striking ..... 339
Ointment ..... 354
Omaha, U. P. R. R., bridge at ..... 225
Opals, something about ..... 132
Opera chair ..... 139
Ophir, the land of ..... 213
Odium, antidote to ..... 73
Optics, question in ..... 298
Ore and stone crusher ..... 155
Ores, extracting the precious metals from their ..... 228
Ores raised from the veins ..... 162
Organ ..... 314
Organ action ..... 107
Organic chemistry, the present status of ..... 232
Organic substances from their inorganic elements, making ..... 215
Origin of microscopic living forms ..... 273
Oscillating steam engine ..... 250, 314
Ostrich, the ..... 193
Overcoming dead centers and preventing back motion of crank wheels ..... 331
Overshoes, improvement in ..... 131
Oxalic acid ..... 192
Oxygen, cheap method for ..... 36
Oxyhydric light in Paris, the ..... 306, 329
Oxyhydrogen light ..... 8
Oyster basket ..... 299
Oyster cap ..... 402
Oyster dredge ..... 330
Oysters in the Chesapeake ..... 265
Oyster steamer ..... 234
Oyster trade, the ..... 129
Ozone, concentrated ..... 325
Ozone in the ageing of alcoholic drinks ..... 409
Ozone produced by the combustion of hydrogen ..... 325

P

Packing ..... 402
Packing case ..... 387
Packing, piston rod ..... 268
Packing rings ..... 281
Paddle mechanism for boats ..... 250
Paddle wheel ..... 10, 355
Paine, departure of Mr ..... 321
Paint brushes ..... 107
Paint, cheap ..... 227
Paint, compound ..... 330
Painting ..... 131
Painting bath tub ..... 249
Painting, improvement in decorative oil ..... 101
Painting sheet iron ..... 233, 249
Painting the inside of an iron water tank ..... 355
Paint, rubber g apolite ..... 416
Palette, reservoir ..... *347
Paneling machine ..... 218
Paper barrels ..... 244
Paper collars are made, how ..... 400
Paper comfortables ..... 35
Paper feeding machine ..... 139
Paper for packing ..... 42
Paper friction pulleys ..... 200
Paraffin ..... 229
Paraffin, new use of ..... 111
Paraffin wax ..... 328
Parchment paper ..... 368
Paris green ..... 386
Paris green and potato bugs ..... 413
Paris, the Hôtel Dieu ..... 137
Parliament house in Berlin, new ..... 208
Paste to repel insects ..... 127
Patent case, the rubber tip ..... 351, 394
Patent decision ..... 8
Patent drawings, printing the ..... 177
Patent extension cases, Congress and ..... 151
Patent infringement cases ..... 344, 368
Patent infringement suits ..... 121
Patenting small articles ..... 101
Patent job before Congress, another big ..... 216
Patent law in Canada, a new ..... 415
Patent law reform in England ..... 320
Patent laws, the English ..... 380
Patent lists ..... 385
Patent Office curiosity, and a specification in rhyme, a ..... 227
Patent Office decisions ..... 133
Patent Office examiners, timely hints for ..... 353
Patents, abridgment of the annual report of the Commissioner, 1871 ..... 84
Patents, annual report of the Commissioner of ..... 87
Patents, Canadian ..... 352
Patents, how general business is influenced by ..... 87
Patents issued, index of, 12, 28, 44, 60, 76, 92, 108, 124, 140, 156, 172, 187, 203, 219, 235, 251, 268, 283, 300, 315, 331, 356, 372, 403, 404.
Patents, proposed book on ..... 328
Patents, publication of the ..... 84, 151
Patents, recent decision of the Commissioner of ..... 225
Patents, sensible suggestions about ..... 364
Patents, the rubber ..... 264
Patent suit, an interesting ..... 355
Patent suit on car wheels ..... 244
Patent systems compared, the American and English ..... 85, 87
Pattern for cutting garments ..... 355
Pavement, improved wood ..... *63
Pavement, Price's composition ..... 223
Pavements for streets ..... 82
Peanut thresher and separator ..... 402
Pearls ..... 164
Pearls are prepared in China, how genuine ..... 305
Peat fuel for locomotives ..... 310
Pedal attachment for pianos ..... 171
Peg cutter ..... 219
Pencils, lead ..... 366
Perfuming, Arabian mode of ..... 360
Permanent pencil marks ..... 200
Persia, famine in ..... 150
Pestle for hulling coffee, rice, etc ..... *391
Petroleum and coal ..... 396
Petroleum and its products ..... 335
Petroleum forge ..... 315
Petroleum, furnace for burning ..... 137
Petroleum, origin of ..... 340
Petroleum, Pennsylvania ..... 229
Petroleum, products of ..... 340
Petroleum, refining ..... 340
Petroleum, the generation of ..... 342
Petroleum, the origin of ..... 349
Petroleum, transportation of ..... 340
Pharmacy, the New York Commissioners of ..... 73
Philadelphia manufactures ..... 193
Phosphate of chalk ..... 386
Phosphorescence by frictional electricity ..... 129
Phosphorescence of marine animals, the ..... 117
Phosphoric light, the ..... * 99
Phosphorus, absorption of matter by ..... 192
Phosphorus bronze ..... 131
Photo-engraving on metals ..... 257
Photographic improvement, valuable ..... 229
Photographic lens ..... 402
Photographic process, a new ..... 129
Photographic toilet and hat rack ..... 280
Photographs, a simple plan of polishing ..... 398
Photographs, hints on coloring ..... 397
Photography—A queer case ..... 164
Photo-intensifying process ..... 281
Photo-mechanical printing process ..... 38
Piano truck ..... 414
Pickle and cruet stand ..... 370
Pig iron ..... 70
Pin points in steel ..... 313
Pins in England, manufacture of ..... 20
Pin spots in steel ..... 233
Pipes, copper gas ..... 165
Pipe tongs ..... 282
Pipe wrench ..... 10, 75, 341
Piston for printing press ..... 2
Pitman connection for harvester ..... 355
Pitman connection, Ketchum's ..... *198
Pivot for sewing machines, etc., expansive ..... *322
Planetary genesis ..... 345
Planetary heat, the phenomena of ..... 345
Planter ..... 370
Planter and cultivator ..... 139
Plaster to walls and ceilings, applying ..... 112
Plastic composition ..... 50
Platinum black, new method for ..... 163
Plow ..... 11, 59, 123, 282, 283, 330
Plow carriage ..... 123
Plow cleaner ..... 75
Plow handles ..... 42
Plows, double ..... 279
Plug for leaky boiler tubes ..... 314
Plumagery, Chinese ..... 325
Pneumatic railway brake and other applications of the pneumatic system ..... 399
Pneumatic springs ..... 314
Pneumatic tubes, from New York to New Orleans in ..... 348
Pneumonia—Changing clothing ..... 164
Pocket flask ..... 250
Poisoned collars ..... 257
Poisonous collars ..... 386
Poisons, metallic ..... 388
Polarizing instrument ..... 328
Polishing gun barrels ..... 281
Polishing wood ..... 72
Pointing wooden articles ..... 138
Polish, liquid ..... 38
Population of London ..... 149
Portable fire escape ..... 43
Portland cement ..... 138
Portland cement and iron filings ..... 73
Postal service, an international ..... 293
Post hole augers ..... 131
Posts, wrought iron and steel ..... *99
Potash from corn cobs ..... 306
Potassium, a new method of obtaining ..... 293
Potato and peanut digger ..... 330
Potato beetle, the Colorado ..... 351
Potato digger ..... 186, 267
Potatoes, to keep ..... 89
Pounding of piston ..... 138, 155, 170, 217
Power by telegraph, water ..... 117
Power for underground purposes, on exhaustion as a ..... 84
Power hammer, the dead stroke ..... *82
Power of engine ..... 138
Prairie breaker ..... 330
Premiums to locomotive engineers ..... 146
Preparing fabrics for paint ..... 370
Preparing horse radish ..... 371
Preparing moss for ornamental baskets ..... 355
Preserving bird skins ..... 313
Preserving eggs ..... 12
Preserving natural flowers 122, 2 1, 281
Preserving nuts ..... 304
Press ..... 171
Press, air spring printing ..... 407
Press, baling ..... 278
Pressure gage question ..... 217
Pressure gages, freak of ..... 218
Pressure in boilers, variance between hydrostatic and steam ..... 100
Prickly heat, to remove ..... 305
Printing from iron ..... 291
Printing on glass ..... 289
Printing patents and patent reports ..... 87
Printing press ..... 259
Printing rollers, how to wash ..... 348
Printing telegraph ..... 10
Process and apparatus for yellowing tobacco, etc ..... 250
Process for coating iron with zinc ..... 402
Progress and popular science ..... 38
Progress, scientific and industrial ..... 80
Projectile for fire arms ..... *178, *366
Projectile for small arms ..... 75
Propagation of sponge ..... 245
Propeller wheel for fluid meters ..... 314
Propelling and steering vessels, apparatus for ..... 202
Propelling boats ..... 155, 299
Propelling canal boats, improved method of ..... *289
Propulsion of canal boat ..... 42
Propulsion of vessels ..... 43, 91
Pruning knife ..... 58
Pruning shears ..... 91
Prussian blue, dyeing ..... 281
Psychic force ..... 4, 5, 19
Psychic force—Spirit faces ..... 169
Puddling furnaces ..... 279
Puddling iron by machinery—an important improvement ..... 327
Puddling tool, improved ..... *379
Pulley and wheel fastener ..... 201
Pulleys and belting ..... 277
Pulleys, breaking of cast iron ..... 18
Pumice stone, shaving with ..... 213
Pump ..... 123, 283
Pumps, improvement in ..... 352
Pump valve ..... *275
Punch and dye for finishing umbrella staff collar ..... 371
Punching press and drop press ..... *287
Pyramid of Egypt, the Great ..... 198
Pyramid, weight of the Great ..... 163
Pyroligneous acid ..... 121
Pyroligneous products ..... 95

Q

Quicksilver found in a grave ..... 392
Quicksilver in California ..... 350
Quilting frame ..... 201

R

Rabbit skins, tanning ..... 217
Rags, the uses of old ..... 348
Railroad accident near Springfield, Mass ..... 227
Railroad cars and locomotives ..... 197
Railroad car ventilator ..... 299
Railroad chair ..... 201
Railroad men, educated ..... 409
Railroad safety signal, a new ..... 325
Railroad truck cleaner ..... 186
Rail straightener, railroad ..... *359
Railway Association, the Western and Southern ..... 307
Railway in the Andes ..... 165
Railway problem ..... 138
Railway, proposed city ..... *246
Railway signal ..... 330
Railway signals, $10,000 reward for improved ..... 408
Railway switch ..... 250
Railway tie ..... 371
Railway track cleaner ..... 201
Ramie ..... 229, 259
Rancid butter ..... 266
Ratchet drills ..... 91
Rats, notes about ..... 377
Rattlesnakes ..... 281
Rattlesnakes, a lecture on ..... 165
Readers, to our ..... 103
Reading ..... 346
Recipes, reliable ..... 261
Reciprocating steam engine ..... 267
Reclus, Elisee ..... 184, 213
Record, an ancient ..... 352
Red ink ..... 90
Red River raft ..... 169
Red spider ..... 106
Reed organ ..... 123
Reel, clothes line ..... *259
References, false ..... 398
Refining the lead ..... 193
Refining the silver ..... 193
Refrigeration by means of ammonia ..... 380
Refrigerator ..... 11
Refrigerator, dynamic ..... 398
Regelation ..... 325
Regulator and heat economizer, draft ..... *310
Regulators at Paris, public clock ..... 395
Re-implantation ..... 277
Reissues ..... 85
Relic, a ..... 53
Religion and science ..... 104
Remington works, Ilion, N. Y ..... 240
Reports, State ..... 200
Resawing machine and siding saw ..... *146
Reversible axle skeins ..... 314
Reversible filter ..... 355
Reversible flock cutting machine ..... 10
Reversible shade fixture ..... 370
Revolution of bodies ..... 9, 27, 42
Revolving urn and spice stand ..... 10
Rhigolene ..... 229
Rhubarb in tin cans ..... 330
Rice cleaner ..... 123
Rice, to boil ..... 325
Riding, fast ..... 411
Riding saddle ..... 27
Rifled guns, grooves in ..... 90
Rigging for vessels ..... 267
Riveting device ..... *382
Road dresser ..... 10
Road pavement ..... 250
Road steamer *America*, the ..... *79
Roadways, granite and asphalte ..... 24
Roller skate ..... 76
Roofing, improvement in ..... 68
Roofing, metal ..... 288
Roof of the depot, Saratoga Springs, fall of the ..... *115, *163
Roots in thunder storms, metallic ..... 365
Rope railway ..... *275
Rope tramways in Germany, underground ..... 306
Rotary engine ..... 42
Rotary engines ..... 84, *147, *194
Rotary motion ..... 58
Rotary puddling furnace ..... 416
Rotary pump ..... 315
Rotary steam engine ..... 84, 107, 299
Rotary valve ..... 11
Rubber boots ..... 155
Rubber fillings for transmission wheels ..... 244
Rubber, old ..... 349
Rubber to wood and metal, how to fasten ..... 75
Rudder, a substitute for a ..... 168
Rules, making ..... 249
Ruling pen ..... 186
Russian International exhibition, the ..... 88

S

Safety gages, compulsory ..... 135
Safety guard for hatchways ..... 218
Safety valve ..... 355
Safety watch pocket ..... 123
Safety whiffletrees ..... 75
Salt and ice ..... 27, 42
Salt and iron hail ..... 128
Saltpeter deposits of Peru, the Chili ..... 277
Salts for watering streets ..... 313
Salts sensitive to heat ..... 288
Salt, value of ..... 178
Salve ..... 107, 139
Sand and gravel separating machine ..... 402
Sand in drive well ..... 170
Sand paper holder ..... 201
San Francisco, Mechanics' Institute of ..... 261
Sash holder ..... 42, 43, 91, 107, 139, 282, 298
Sash lock and stop ..... 315
Saving money ..... 348
Saw clamp ..... *70
Saw dust, non-inflammable ..... 218
Saw filer's vice ..... 58
Saw filing ..... 122
Saw filing machine ..... *182
Saw, foot power buzz ..... *366
Saw gear ..... 74
Sawing, boring, and planing machine ..... 414
Sawing machine ..... 139, 139, 283, 330
Sawing machine, spiral spring scroll ..... *214
Sawing wood without a saw, novel method of ..... 407
Saw mill ..... 314
Saw mill gearing ..... 122
Saw mills, light engines for ..... 107, 138
Saw mill, steam engine for ..... 122
Saws and files, and their manufacture ..... 212
Saw set ..... 298
Saw setting ..... 138
Saws, improvement in ..... 211
Saws, improvement in gig ..... 365
Saw, speed of circular ..... 138, 186, 200
Saw, the band ..... 65
Scarlatina ..... 245
Scarlet fever, non contagiousness of ..... 117
Scene painting ..... 200
Schoharie Court House, its factories, etc ..... 260
Schools in Denmark ..... 381
Science and intellect ..... 169
Science and religion ..... 104
Science at Cornell, experimental ..... 49, 168
Science in the courts ..... 167
Science perfecting swimming ..... 54
SCIENCE RECORD for 1872 ..... 2, 8
Science to religion, the relation of ..... 263
SCIENTIFIC AMERICAN, Chicago's opinion of the ..... 329
SCIENTIFIC AMERICAN, the ..... 177
Scientific investigations, how to conduct new ..... 351
Scientific work, a new ..... 106
Screening apparatus ..... 94
Screw cutting ..... 27
Screw cutting, compound gears for ..... 170
Screw cutting gears ..... 58, 122
Screw driver ..... 387
Screws, obdurate ..... 245
Screw threads ..... 5
Screw wrench ..... 202
Scroll saw guide ..... 12
Scroll sawing machine ..... 267, 387
Scums from boilers, collecting and removing ..... *191
Seals of Alaska ..... 118
Sea sickness ..... 324, 396
Sea sickness, Governor Evans on ..... 398
Seats for vehicles ..... 298
Sea water to make bread ..... 129
Sea weed as a fertilizer ..... 244
Sea weeds a thousand feet long ..... 398
Secchi, experiments by Father ..... 5
Sectional steam generator ..... 43
Seed dropper ..... 330
Seeder ..... 27
Seed planter ..... 387, 402
Seed planter and guano spreader ..... 75
Seeds, starting flower ..... 318
Self acting mule for spinning ..... 107
Self adjusting thread tension for sewing machines ..... 266
Self locking blind butt ..... 218
Self operating gate ..... 11
Self sealing pail ..... 186
Sensitive paper in photography, durable ..... 166
Sewage poison ..... 53
Sewer water as a manure ..... 393
Sewing machine ..... 186, 218, 387
Sewing machine case ..... 402
Sewing machine job before Congress, the great ..... 247
Sewing machine job, the Congressional ..... 295
Sewing machine ring in a new role, the ..... 384
Sewing machines and their effect upon health ..... 247, 308
Sewing machines in Scotland, manufacture of ..... 310
Sewing machine, the Beckwith *70, *166
Shad breeding ..... 288
Shafting, light *versus* heavy ..... 199
Shakespeare, statue of ..... 348
Shampooing apparatus ..... *262
Shaping the butt end of gunstocks ..... 208
Shave, how to ..... 104
Shaving with pumice stone 149, 180, 281
Shawl or other dress pin ..... 75
Shellac varnish with linseed oil ..... 249
Shingle machine ..... 10, 202
Shingles, making ..... 348
Shipbuilding in the Clyde ..... 409
Ship ventilator, fog alarm and bilge pump ..... *15
Shoe fastener ..... 171
Shoe fastening ..... 58
Shoe fastenings ..... *146
Shoshone, the great waterfalls of the ..... 177
Shovel plow ..... 299
Shutters, iron window ..... 4
Sick headache—Its cause and some of its remedies ..... 128
Sidewalk, endless travelling or railway ..... *263
Signal light, inextinguishable ..... *243
Signal, novel railway ..... 31
Signals, new device for railway ..... *395
Signboards of New York ..... 400
Silk fabrics, test for ..... 57
Silk manufactures at Paterson, N. J ..... 308
Silkworm eggs, regulating the hatching of ..... 381
Silkworms, Delprino's method of treating ..... 207
Silkworms' eggs ..... 89
Silver extracting process in Germany, the Parkes ..... 193
Silver, Nevada ..... 380
Siphon ..... 354
Skeleton, preparing ..... 249, 281, 330
Sky, measuring the clearness of the ..... 259
Slabbing machine ..... 298
Slag for road making ..... 308
Sled ..... 234
Sledge hammers ..... 351
Sleep and dreams ..... 210
Sleeplessness ..... 35
Slide valve questions ..... 138, 155
Slide valves, balancing ..... 121, 186, 328
Slide valve steam engine, the ..... 217
Slide valves, wearing of ..... 106
Small pox by one who has tried it, a remedy for ..... 133
Small pox, darkness in the treatment of ..... 35
Small pox—Its prevention—treatment of patients ..... 231
Small pox pustules, the effect of light on ..... 89
Small pox remedies ..... 196
Small pox, the spread of ..... 72
Small pox, xylol as a remedy for ..... 277
Smelting for gold ..... 160
Smoke burning improvement ..... 168
Smoke or not to smoke, to .. 5, 20, 36
Smut machine ..... 58
Snakes charm birds? do ..... 412
Snow on the Blue Mountains ..... 146
Soap ..... 66
Soap a source of skin diseases ..... 309
Soap grease, to preserve ..... 243
Soap holder ..... 354
Soap, improvement in the manufacture of ..... 17
Soap root, curled ..... 262
Society of Arts of the Massachusetts Institute of Technology ..... 21, 116, 161, 229, 292
Soda ..... 49
Sofa bedstead ..... 250
Softening frozen ground for excavating ..... 164
Softening lead ..... 9
Soil pulverizer ..... 91
Solar prominence, observed changes in a ..... *179
Soldering iron ..... 371
Soldering tool ..... 355, 370
Solid bilge boat ..... 299
Sonorous stone ..... 107
Soot as manure ..... 23
Soot in stove pipes ..... 201
Sores, cure for ..... 164
Sound in buildings influenced by ventilation, the effect of ..... 135
Sounding board for piano ..... 11
Sound of light, waves of ..... 211
South America, the natural features of ..... 72
South Carolina, the mineral resources of ..... 184
Space, celestial ..... 320
Spade ..... 370
Spade bayonets ..... 75
Spark arrester ..... 11, 171, 250, 261
Spark catcher and consumer, Beach's ..... *198
Speaking wisely ..... 229
Specific heat applied to the determination of very high temperatures, the knowledge of ..... 168
Spectra, anomalous ..... 396
Spectroscopes, liquid ..... 73
Spectroscope, substitute for the ..... 25
Spectroscopic measurements ..... 248
Spectroscopic reflector ..... 105
Speculation, mining—Something as applicable to New York as to London ..... 128
Spinning mules ..... 91
Spiritualism answered by Science ..... 248
Spittoon chair ..... 314
Spotting gunstocks ..... 208
Spring bed bottom ..... 91, 92, 202, 234, 416
Spring bit for cleaning wells, etc ..... 58
Spring, brittle spiral ..... 354
Spring for railway cars ..... 330
Spring perches for bird cages ..... 27
Staining canes ..... 106
Stalk chopper ..... 402
Stanchion, automatic cattle ..... *290
Stand for testing fire arms ..... 313
Starch, new test for ..... 25
Star depths, the ..... 300
State education and the labor question ..... 97
Stave jointing machine ..... *226
Steam boat chimney ..... 186
Steam boiler ..... 37, 186
Steam boiler float valve ..... 43
Steam boiler furnace doorways ..... 314
Steam condenser ..... 202
Steamer *Adriatic*, the ..... 321, 330
Steamers for the Mississippi, iron ..... 127
Steam generator ..... 371
Steam gun, Perkins' ..... 275
Steam, high and low ..... 155
Steam jet air exhaust, the ..... 377
Steam power, great reduction in the cost of ..... *31
Steam pump ..... 11, 202
Steam street cars ..... 240
Steam, substituting other vapors for—Ether and bisulphide of carbon ..... 119
Steam, substituting other vapors for—Liquefied carbonic acid ..... 135
Steam, superheating ..... 36, 401
Steam, the heating of buildings by ..... 89
Steam tillage ..... 353
Steam under different temperatures and pressures, power produced by ..... 312
Stearin with paraffin, adulteration of ..... 352
Steel, annealing ..... 386
Steel, color and temper of ..... 375
Steel field guns, Prussian ..... 197
Steel filings, ignition of ..... 233
Steel for punches, etc ..... 353
Steel headed rails ..... 259
Steel, on the heating of ..... 380
Steel, the inventor of puddled ..... 384
Steel, the Nes silicon ..... 385
Steel tools, making ..... 393
Stellar chemistry, the progress of ..... 181
Stencil plate ..... 282
Stenographic machine ..... 258
Stenhydraulic apparatus ..... *38
Stevens Institute, reception of the mining engineers at the ..... 368
Stimulant, the new ..... 69
Stone, artificial ..... 23
Stone cutting machine ..... 27
Stone lifter and stump extractor ..... 155
Stone, preservation of ..... 49
Stone puller ..... 17
Stool, gardener's ..... *306
Stop motion for drawing frames ..... 186
Stop motion for machine for covering cord ..... 299
Stopper, bottle ..... *211
Stopper for bottles, etc ..... 218
Stove pipe, cleansing ..... 266
Stove pipe fitter ..... 402
Strain on boilers ..... 122
Street car ..... 387
Strength, the pursuit of ..... 53
Strike in New York, the eight hour ..... 399
Strike, progress of the eight hour ..... 415
Striking bag, improved ..... *230
Strychnine, the effect of a grain of ..... 67
Stud fastener ..... 10
Stump extractor ..... 171
Stupidity or ignorance, the ..... 152
Styptic, a new ..... 3
Submarine telegraph cables, injuries to ..... 121
Submarine telegraphs, progress of ..... 96
Subterranean fires, utilizing ..... 197
Subscribers, to our ..... 404
Suez canal, the ..... 401
Sugar, improvement in the manufacture of ..... 68
Sugar manufacture, new process of ..... 69
Sulky plow ..... 107, 171
Sulphates of soda and potash and chlorine ..... 165
Sulphide of bismuth ..... 99
Sulphide of sodium ..... 245
Sulphite of soda as a remedy for small pox ..... 135
Sulphite of soda not a cure for small pox ..... 180
Sulphuretted alcohol ..... 152
Sulphur, fusing ..... 58
Sulphuric acid ..... 49
Sulphuric acid—New mode of manufacture ..... 111
Sulphur in hair washes ..... 170
Sulphurous acid, boiling point of ..... 133
Sun, a probable cause of terrestrial magnetism, the ..... 305
Sunday, opening the public libraries on ..... 311
Sun spots and cholera ..... 376
Sun, the ..... 112
Supplement to the SCIENTIFIC AMERICAN ..... 328
Supporting busk for corset fastenings ..... 75
Surface blow for marine boilers ..... 186
Survey, the coast ..... 51
Suspender, self adjusting ..... *22
Swedish iron, tensile strength of ..... 107, 1.5, 217
Swimming bird, a curious ..... 177
Switch for printing telegraphs ..... 402

T

Tableau, stereometrical ..... *359
Tallow tree and its uses, the ..... 289
Tanite wheels ..... 259
Tannin, concentration of ..... 307
Tanning leather, vacuum tanks for ..... 146
Tanning rabbit skins, etc ..... 233
Tan small skins, to ..... 266
Tariff and tax reductions, the ..... 416
Tea and coffee-pot stand ..... *280
Tea plantation, a California ..... 51
Tea, wild ..... 138
Technical and classical education ..... 149
Teeth, caries of the ..... 89
Teeth, painless extraction of the ..... 33
Telegraph, acoustic ..... 352
Telegraph between Scotland and Canada ..... 385
Telegraph, British army ..... 346
Telegraph cables, submarine ..... 215
Telegraph company, American District ..... 169
Telegraph ground wire ..... 90
Telegraphic improvement, a remarkable ..... 281
Telegraphic insulators and brackets ..... 146
Telegraphing at sea ..... 278
Telegraph instrument, the Stearns ..... 328
Telegraph insulators, testing ..... 330
Telegraph in the Andes ..... 165
Telegraph pole, iron ..... 306
Telegraph poles, preparing ..... 409
Telegraph printing apparatus ..... 91
Telegraph sounder ..... 330
Telegraph, the wonders of the ..... 346
Telegraphy ..... 123
Telegraphy, postal ..... 164
Telegraphy without insulation ..... 396
Telescope, proportions of a ..... 330
Tellurian ..... 139
Temperature of the sun ..... 177
Tempering springs ..... 170, 200, 249, 313
Tempering steel bits ..... 186
Terra cotta ..... 209
Test for iron and steel ..... 249
Test for lead ..... 249
Test for sulphur and phosphorus in iron ..... 309
Testing bark for tannin ..... 266
Testing machine, Colt's armory ..... *175
Testing the oil ..... 341
Testing the strength of materials ..... 292
Testing the strength of metals, wire, chains, etc ..... *207
Thames tunnel and Suez canal, the ..... 17
Thermometer, separation of mercury in a ..... 330
Thermometrical experiments ..... 376
Thill coupling ..... *6, 107, 123, 218
Thinking, the art of ..... 136
Thistles ..... 90
Thread cutting tools ..... 346
Three horse equalizer ..... 402
Throttle valve stand and stem ..... 299
*Thunderer*, the ..... 291
Ticket holder ..... 11, 387
Tilting machine ..... 402
Timber for water pipes ..... 313
Time lock for burglar proof safes ..... 155
Timely suggestions ..... 8
Time piece, a huge ..... 292
Time, the use of ..... 225
Tin foil—its uses and manufacture ..... 367
Tin in New South Wales ..... 385
Tin kettles ..... 381
Tin, Lake Superior ..... 368
Tinman's tongs ..... 27
Tinning cast iron ..... 313
Tinning small articles ..... 91
Tire setters ..... 107
Tobacco box ..... 371
Tobacco drying house ..... 370
Tobacco manufactories in Brooklyn, the ..... 224
Tool for cutting sheets of wet or pasted paper, etc ..... 186
Tool for removing the roller of a watch ..... 314
Tool handle, fastening ..... 231
Toothache ..... 393
Top prop for carriages ..... 314
Tornado, a recent ..... 409
Torpedo boats, Prussian ..... 105
Torpedoes, railway ..... 375
Toy ..... 91
Toy pistol ..... 75, 402
Traction engine ..... 159
Trade mark decision, important ..... 257
Trade marks ..... 85
Trade marks in England, the law of ..... 112
Trade marks, the common law of ..... 183
"Trade, sorry he did not learn a" ..... 349
Trades union tirade, a ..... 248
Tramway by steam ..... 33
Transferring negative films ..... 321
Transit in New York, rapid ..... 415
Transmitting power ..... 90
Transparencies for the lantern ..... 131
Transplanting hair ..... 223
Trap for sewer and drainage reservoirs, self-acting ..... *230
Traveling bag ..... 186
Traveling stones ..... 166
Traverse motion ..... 107
Tray holder ..... 250
Tree and plant protector ..... 354
Tree planting ..... 368
Trolling hook ..... 186
Trouble, what to do when you are in ..... 71
Troy, stove manufactories in ..... 160
Truing grindstones ..... 201
Truffles, hunting ..... 365
Truck lid support ..... 43
Trunk lock ..... 107
Truss ..... 234
Tubal Cain ..... 163
Tuck marker for sewing machines ..... 75
Tug buckle ..... 402
Tug clip ..... 282
Tungsten colors ..... 54
Tungsten compounds ..... 210
Tunnage of a vessel ..... 91
Tunnel at Genoa ..... 257
Tunneling, cost of ..... 115
Tunneling under city streets.—The atmospheric railway ..... 183
Tunnel, sub aqueous ..... 288
Tunnel, the Detroit river ..... 80
Tunnel under the British Channel, railway ..... 115
Turbines, testing ..... 364, 412
Turbine water wheel, a ..... 292
Turbine water wheels, testing ..... 4, 228
Turbine wheels trustworthy? are experimental tests of ..... 183
Turning the fore end of gunstocks ..... 208
Tweer ..... 75
Twin boilers ..... 9
Twine cutter ..... * 38
Tyndall and the boys, Professor ..... 97

U

Ulcers, the earth cure of ..... 35
Umbrella frames ..... 245
Unwinder for hooked tobacco ..... 11
Upright pianoforte ..... 10, 155, 234
Uterine supporter ..... 234
Utilizing husks ..... 90

V

Vaccination ..... 105
Vaccine matter ..... 168
Vacuum in casks ..... 281, 387
Vapor, air, ice and water, Professor Tyndall on ..... *83, *394
Varnish, copal ..... 298
Varnish for violins ..... 281
Vault cover lock ..... 43
Vegetable seed ..... 82
Velocipede ..... 234, 298
Velocity of cannon balls, measuring the ..... 69
Velocity of railway trains, measuring the ..... 328
Velocity of rotation, measuring ..... 242
Velvet reel ..... 416
Ventilation and heating of buildings ..... 71
Ventilation of kilns ..... 200
Ventilator for windows ..... 314
Vermont, industrial activity in ..... 352
Vesuvius and other volcanoes ..... 377
Vibration of the air ..... 185
Vienna exposition of 1873, the ..... 384
Vinegar, prevention of freezing of ..... 218
Violin varnish ..... 281
Vise ..... 155
Vise, eccentric spring ..... *2
Vision, recurrent ..... 257
Voltaic light ..... 185
Voltaic pile ..... 185

W

Wagon body lifter ..... 250, 354
Wagon brake ..... 27
Wagon brake, improved ..... *118
Wagon tire tightener ..... 354
Wagon wheel ..... 76, *194
Wagon wrench ..... 313
Walking ..... 241
Walking planter ..... 91
Wall guards for furniture ..... 155
Walnut doors, renewing the color of ..... 218
Walrus hunting ..... 118
Want, a long felt ..... 312
War, the science of ..... 150
Warwick Castle, the fire at ..... 81
Wash basin ..... 371
Wash boiler ..... 10, 355
Washed, how summer suits should be ..... 397
Washing machine ..... 10, 27, 42, 107, 153, 201, 202, 282, 283, 330, 354, 370
Watch chain fastening ..... 123
Watch, cleaning ..... 149
Watch escapement ..... 11
Watches, regulating ..... 19
Watchmaker's lathe ..... 92
Watch manufactory, a visit to a ..... 228
Water, compressible ..... 233
Water conductors ..... 69
Water consumed by a locomotive ..... 85
Water cut-off ..... 201
Water decomposed by metals ..... 4, 4
Water, effect of animal excreta on ..... 118
Water elevator ..... 107, 201
Water from chloride of lime, purifying ..... 135
Water gate, improved ..... *310
Water heater and purifier ..... 75
Water, ice, vapor, and air, Professor Tyndall on ..... *83, *394
Watering device for railroads ..... 42
Water in its relation to public health, the nutilization of ..... 279
Water meter ..... 402, 402
Water pipe, "sanitary composite" ..... 376
Water power ..... 138
Water power in the Himalayas ..... 36
Waterproof glue ..... 181
Waterproofing boots ..... 90, 155
Waterproofing cotton cloth ..... 122
Waterproofing, new processes of ..... 105
Water, purity of ..... 217
Water, supply of ..... 401
Water, to purify ..... 291
Water, weights and measures of ..... 184
Water wheel ..... 10, 234, 250, 266, 267, 355, 376, 387
Water wheel governor ..... *132
Water wheels at Lowell, test of ..... 132
Water wheel tests, the Lowell ..... 165
Water wheel, turbine—a proposition ..... 52
Waves, ocean ..... 377
Waves of sound and light ..... 211
Waves, the power of the ..... 166
Wax of China, insect ..... 344
Weather, rough ..... 224
Webster's spelling book ..... 265
Weight of wrought iron and steel ..... 229
Weight, pressure, force, power, work ..... 415
Welding copper ..... 281
Well auger ..... 186
Well, disinfecting ..... 249
Wells in Chicago, artesian ..... 320
Wells, the air in ..... 97
What one firm has done, others may do ..... 101
Wheat scouring machine ..... 354
Wheel ..... 27
Wheel cultivator ..... 75
Wheel for vehicle ..... 266
Wheel making, improvements in ..... 346
Wheel, pit car ..... *382
Whiffletree clip ..... 10
Whiffletree, improved ..... *262
White lead and other pulpy materials, apparatus for drying ..... 69
Whitewash, durable ..... 298, 330
Whitewash, incombustible ..... 200
Wicks, lamps, fluids, imperfection in ..... 104
Wild bees ..... 354
Wild tea ..... 354
Windmills ..... 386
Windmill, the right kind of ..... 261
Window awning ..... 27
Window blind slat ..... 370
Window sashes ..... 380
Window sashes, fastening loose ..... 241
Window sash supporter ..... 235
Window shade ..... 298
Windmill, power of ..... 281
Wine growers, advantage of Californian over European ..... 49
Wine growing in America ..... 184
Wines, he tug ..... 105
Wire nettings, machine for making ..... 16
Wire ropeway for transporting ores ..... 195
Wood ashes ..... 226
Wood screw ..... *387
Woods dirt, gather ..... 131
Woolen cloth factory in the United States, the oldest ..... 80
Woolens, shrinking of ..... 217
Wool, impurities in ..... 89
Wool, mineral ..... 164
Wool out of mixed fabrics, dissolving ..... 386
Wool, production of ..... 350
Worcestershire sauce ..... 249, 251
Words, good ..... 384
Words last for ever ..... 328
Work ..... 228
Work and ten hours' pay, eight hours' ..... 383
Working man, class legislation and the ..... 52
Working man of the magazine writers, the ..... 20
Workmanship, accurate ..... 55
Work quietly ..... 348
Wrench ..... 10
Wringing machine ..... 171

Y & Z

Yale exploring expedition of 1871 ..... 177
Yaupon ..... 209
Yeddo, Japan, conflagration at ..... 384
Zinc amalgamation for extracting gold and silver ..... 50
Zinc, the mechanical equivalent of ..... 22


© 1872 SCIENTIFIC AMERICAN, INC

# Advertisements.

RATES OF ADVERTISING.

**Back Page - - - - - - $1·00 a line,**
**Inside Page - - - - - - 75 cents a line**
*or each insertion.*

*Engravings may head advertisements at the same rate per ine, by measurement, as the letter-press.*

THE ARCHITECT'S AND BUILDER'S POCKET COMPANION AND PRICE BOOK:

Consisting of a Short but Comprehensive Epitome of Decimals, Duodecimals, Geometry, and Mensuration; with Tables of U. S. Measures, Sizes, Weights, Strengths, etc., of Iron, Wood, Stone, and various other Materials, Quantities of Materials in Given Sizes, and Dimensions of Wood, Brick, and Stone; and a full and complete Bill of Prices for Carpenter's Work; also, Rules for Computing and Valuing Brick and Brick Work, Stone Work, Painting, Plastering, etc. By Frank W. Vogdes, Architect. Illustrated. Full bound in pocket-book form.....$2.00
Bound in cloth.....1.50

POCKET-BOOK OF USEFUL FORMULÆ AND MEMORANDA FOR CIVIL AND MECHANICAL ENGINEERS.

By Guilford L. Molesworth. Second American, from the Tenth London Edition. In one volume. Full bound in pocket-book form.....$2.00

☞ The above, or any of my books, sent by mail, free of postage, upon receipt of price.

My new, revised and enlarged Catalogue of PRACTICAL AND SCIENTIFIC BOOKS, comprising almost every art, trade and calling, 96 pages, 8vo., will be sent, free of postage, to any one sending his address.

HENRY CAREY BAIRD,
INDUSTRIAL PUBLISHER,
406 WALNUT STREET, Philadelphia.

**WOODWARD'S COUNTRY HOMES.**
**150** DESIGNS and PLANS for Houses of moderate cost. $1.50, post paid.
**ORANGE JUDD & CO.,** PUBLISHERS, 245 Broadway, N. York.
☞ Send for Catalogue of all books on Architecture, Agriculture, Field Sports and the Horse.

THE
# CINCINNATI & TERRE HAUTE RAILWAY COMPANY,

Desirous of enlisting the attention of manufacturers to the advantage of locating manufacturing establishments upon the line of their Railway, will give to any Rolling Mill or Blast Furnace Company so locating forty (40) acres of ground for works, and the coal in one hundred (100) acres of Clay or Owen County, Indiana, block coal field; the ore from one hundred (100) acres of the Hardin, Pope or Massac County, Illinois, brown hematite beds, and agree to furnish them with all orders for merchant iron required for the Railway's use for a period of two years. To any Railway Car Manufactory located upon its line, they will give twenty acres of ground required for works, the timber from one hundred acres of the best oak timbered land in Owen County, and an order for one thousand cars to commence work upon. To any Car Wheel Foundry or Axle Forge, the necessary grounds for works, and liberal orders for their products in kind. To all other manufacturing establishments, ample facilities in the locating and successful prosecuting of their works.

Circulars descriptive of the manufacturing points upon the line of the Railway will be mailed to any address upon application to

MATT. P. WOOD,
Gen'l Sup't C. & T. H. R. R., Terre Haute, Ind.

## *Niagara Steam Pump.*

CHAS. B. HARDICK,
23 Adams st., Brooklyn, N. Y.

FOR SALE—STATIONARY ENGINE, 100 H.P., with five boilers, frames, settings, &c. All complete and nearly new. Suitable for saw-mill or similar purpose. Apply
BALDWIN LOCOMOTIVE WORKS, Philadelphia, Pa.

**$50.000** Can be made in one year on Abbot's Practical Washing machine by Parties with Capital. Address, with two Stamps,
JAMES ABBOT, Fitchburg, Mass.

A CURIOSITY.—Have you seen the RUNNING RINGS noticed in the SCI. AM., Vol. XXII, 20? Amuses old and young. Chain 14 in. long. Illustrated Circular free on application. $1 75 per doz.; single one by mail 25c. and 6c. in stamps for return postage. If not for sale at your book, periodical, or toy stores, address the manufacturers, "WILCOX CRITTENDEN & CO.," Middletown, Conn., or "The Am. News Co.," New York.

ORIGINAL PATENT AGENCY—Estab. 1859. Patents Sold. Send for our Circular and List.
E. H. GIBBS & CO., 11 Wall Street, New York.

NYSTROM'S MECHANICS, NEW EDITION. Pocket Book of Mechanics and Engineering: Containing a Memorandum of Facts and Connections of Practice and Theory. By John W. Nystrom, C. E. Eleventh Edition. Revised and Greatly Enlarged with Original Matter. Fully Illustrated. 16mo. Tuck, gilt edges. $3.50. Will be sent by mail on receipt of price by
J. B. LIPPINCOTT & CO.,
PUBLISHERS,
Philadelphia, Pa

**SECTIONAL Fourneyron Turbine Water Wheel.**
The only wheel that gives full percentage when only one fourth gate is used. No complications.
WM. J. VALENTINE,
Ft. Edward, N. Y.
☞ Prices reasonable.

STEPTOE, MCFARLAN & CO.,

Manufacturers of the most improved Patent Daniels, Woodworth & Farrar Planers, Sash and Moulding, Tenoning and Mortising Machines, Wood-turning Lathes, and every variety of Wood-working Machinery. Cuts and prices sent on application. Warehouse and Manufactory, No. 214 to 220 West Second Street, Cincinnati, O.

A. S. & J. GEAR & CO.,
LE MANUFACTURERS OF
**Gear's Variety Moulding and Shaping Machine,**
**Gear's Paneling and Carving Machine,**
**Gear's Automatic Dovetailing Machine,**
**Gear's Car Boring Machine,**
**Gear's Universal Emery Grinding Machine,**
**Gear's Stone Mouldi g and Paneling Machine**
**Gear's Stone Irregular Sh ping and Sawing Machine, and Dealers in every description of Wood and Iron Working Machinery and Mechanical Supplies, selected from all makers.**
☞ Special attention given to fitting out Shops complete. WAREROOMS (the largest in the United States), 56, 58, 60 & 62 SUDBURY STREET, BOSTON, MASS.

FOR SALE—The best property for manufacturing purposes in the City of New Haven, convenient to all the Steamers, Railroads, and the harbor. Address Lock Box 126, New Haven, Conn.

FOOT LATHES, Back Geared and Plane Chucks, Slide Rest, &c. Just the article for Sewing Machines and Shoe Factories. T. SHANKS, Baltimore, Md.



## Reynolds'
TURBINE WATER WHEELS.
The Oldest and Newest. All others, only imitations of each other in their strife after complications to confuse the public. We do not boast but quietly excel them all in staunch, reliable, economical power. Beautiful pamphlet free. Geo. TALLCOT, 96 Liberty st., New York.
Gearing, Shafting.

PERFECTION OF SPEED ON WATER WHEELS secured by the Hydraulic Rotary Governor. Return, after testing, if you can afford to run without it. Address J. S. ROGERS, Tr., 19 John st., Boston.

# WASHOE TOOL MANUFACTURING CO.,
## *Cor. of Park and College Places, New York.*

☞ Manufacturers of the CELEBRATED "WASHOE" ADZE EYE PICKS, adapted for RAILROAD COAL, and MINING COMPANIES.

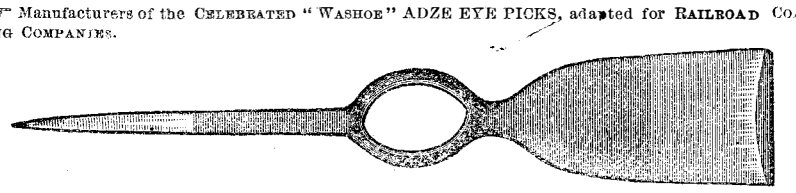

☞ AWARDED THE FIRST PREMIUM, AT THE FAIR OF THE AMERICAN INSTITUTE IN 1868, OVER ALL COMPETITORS. Comparison invited. Competition challenged. Send for circulars.

PATENT BAND SAWING MACHINES



Of the most approved kinds to saw bevel as well as square without inclining the table, by FIRST & PRYIBIL, heretofore at 452 10th avenue—now removed to a more spacious place, 461 to 467 West 40th street, cor. 10th avenue, New York, where we manufacture various sizes of our well known sawing, moulding, double spindle boring and mortising Machines, general and oval turning Lathes, Shafting, Pulleys, &c. &c.

Prices for Band Saw Machines (of which at the present time, April 1st, 136 of our make operate in New York City alone), are $250, $275, $350, and $400. To the largest a feed can be attached to reslit boards. A machine to reslit heavy timber is in construction. Have on hand a large stock of best French Band Saw Blades.

**PLATINUM** H. M. RAYNOR, 25 Bond St., New York.
For all Laboratory and Manufacturing purposes.

**WROUGHT IRON BEAMS & GIRDERS.**

THE UNION IRON MILLS, Pittsburgh, Pa. The attention of Engineers and Architects is called to our improved Wrought-iron Beams and Girders (patented), in which the compound welds between the stem and flanges, which have proved so objectionable in the old mode of manufacturing, are entirely avoided, we are prepared to furnish all sizes at terms as favorable as can be obtained elsewhere. For descriptive lithograph address Carnegie, Kloman & Co. Union Iron Mills, Pittsburgh Pa.

**Moseley Iron Bridge and Roof Co.,**
WRO'T-IRON BRIDGES, WRO'T-IRON HOUSES,
CORRUGATED IRON,
CORRUGATED IRON SHUTTERS, DOORS, PARTITIONS, &c.
**Office, 5 Dey Street, New York.**

PATENT IMPROVED
**VARIETY MOLDING MACHINERY**
And Adjustable
CIRCULAR SAW BENCHES.
For Machines and information, address
J. P. GROSVENOR, Lowell, Mass

# PATENTEES,

WHO WISH TO REALIZE PECUNIARY benefit from their inventions, either by sale of their rights, or partnership with capitalists, are invited to send for our explanatory circular. Many valuable labor saving inventions are lying dormant which might realize a fortune for their owners, if brought properly before the public. E. B. ROBERTS & CO., Consulting Engineers, 15 Wall Street, New York

**2ND HAND ENGINES AND BOILERS**
Bought and Sold on Commission, in good running order, cheap for cash. Sellers wishing to register same on our books, please send for blanks to fill. EDWD. E. ROBERTS, Consulting Engineer, 15 Wall St., New York.

BENNETT'S PATENT ROTARY STEAM ENGINES, ROTARY AIR PUMPS, ROTARY WATER PUMPS, simple, economical, cheap. We offer the above after three years practical working test. Steam Engines from 2 to 150 H.P., Air and Water Pumps, of any required dimensions. All our Engines and Pumps warranted. Send for Circular, or apply to LIGHTHALL, BEEKMAN & CO., 5 Bowling Green, New York.

**Whalen Turbine.** No risks to purchaser. Send for Pamphlet, free. SETH WHALEN & BRO., Ballston Spa, N. Y.

LATHE CHUCKS---HORTON'S PATENT from 4 to 36 inches. Also for car wheels. Address E. HORTON & SON, Windsor Locks, Conn

**BLAKE'S PATENT STEAM PUMP.**



SEND FOR CIRCULAR.

**51 CHARDON ST., Boston, Mass.**
**79 LIBERTY ST., New York.**

BUERK'S WATCHMAN'S TIME DETECTOR.—Important for all large Corporations and Manufacturing concerns—capable of controlling with the utmost accuracy the motion of a watchman or patrolman, as the same reaches different stations of his beat. Send for a Circular. J. E. BUERK,
P. O. Box 1,057 Boston, Mass.
N. B.—This detector is covered by two U. S. Patents. Parties using or selling these instruments without authority from me will be dealt with according to law.

PORTABLE STEAM ENGINES, COMBINING the maximum of efficiency, durability and economy, with the minimum of weight and price. They are widely and favorably known, more than **900** being in use. All warranted satisfactory or no sale. Descriptive circulars sent on application. Address
J. C. HOADLEY & CO., Lawrence, Mass.
46. Cortlandt st. New York.

## *NEW PATTERNS.*

MACHINISTS' TOOLS—all sizes—at low prices.
E. & R. J. GOULD, 97 to 113 N. J. R. R. Ave., Newark, N. J.

CINCINNATI BRASS WORKS.—Engineers and Steam Fitters' Brass Work, Best Quality at lowest Prices. F. LUNKENHEIMER, Prop'r.

RIVERVIEW Military Academy, Poughkeepsie, N. Y. A thorough-going school for boys.

**ROPER HOT AIR ENGINE COMPANY,** 124 Chambers St., New York.

You ask WHY we can sell First Class 7 Octave Pianos for **$290**? We answer—It costs less than $300 to make any $600 Piano sold through Agents, all of whom make 100 per ct. profit. We have no Agents, but ship direct to families at Factory price, and warrant Five Years. Send for illustrated circular, in which we refer to 300 Bankers, Merchants, &c. (some of whom you may know) using our Pianos in 40 States and Territories.
U. S. Piano Co., 865 Broadway, New York.

AGENTS WANTED. Agents make more money at work for us than at anything else. Particulars free. G. STINSON & Co., Fine Art Publishers, Portland, Me.



**WOOD WORKING MACHINERY**
MOLDING, MORTISING, TENONING & SHAPING MACHINES;
BAND SAWS, SCROLL SAWS
Planing & Matching MACHINES, &c.,
For RAILROAD, CAR, and AGRICULTURAL SHOPS, &c., &c.
☞ Superior to any in use.
J. A. FAY & CO.,
CINCINNATI, OHIO.

## Machinery,

Wood and Iron Working of every kind. Leather and Rubber Belting, Emery Wheels, Babbitt Metal, &c.
GEO. PLACE & CO., 121 Chambers & 103 Reade Sts. N. Y.

## Machinists' Tools.

The largest and most complete assortment in this country, manufactured by
NEW YORK STEAM ENGINE COMPANY,
121 Chambers & 103 Reade Streets, New York.

## Cold Rolled Shafting.

Best and most perfect Shafting ever made, constantly on hand in large quantities, furnished in any lengths up to 24 ft. Also, Pat. Coupling and Self-oiling adjustable Hangers. GEORGE PLACE & CO.,
121 Chambers & 103 Reade Streets, New York.

## Sturtevant Blowers

Of every size and description, constantly on hand.
GEORGE PLACE & CO.,
121 Chambers & 103 Reade Streets, New York.

WILDER'S
## Pat. Punching Presses

For Railway Shops, Agricultural Machine Shops, Boiler Makers, Tinners, Brass Manufacturers, Silversmiths, &c., warranted the best produced. Send for Catalogue, &c.
NEW YORK STEAM ENGINE CO.,
121 Chambers & 103 Reade St., N. Y.

MANUFACTURING SITES—Cheap. Water and Rail Facilities. Address JAMES STRATTON, Secretary Board Trade, Bordentown, N. J

**EDWARD H. HOSKIN,**
CONSULTING AND ANALYTICAL CHEMIST,
**Lowell, Mass.**
Chemistry as applied to the Arts, Manufactures and Medicine.

L. & J. W. FEUCHTWANGER,
**Chemists, Importers, and Manufacturers,**
**55 CEDAR ST., NEW YORK.**
Silicate of Soda and Potash, Soluble Glass, Chloride Calcium, Asbestos, Manganese, Wolfram, Metallic Oxides, Metals, Cadmium, Bismuth, Aluminium, Felspar, Fluorspar, Flint, Carb. Strontia and Baryta, for Sale in quantities to suit purchasers. Publishers of Treatises on Gems, Soluble Glass, and Fermented Liquors.

# GREAT REDUCTION IN PRICES

OF LE COUNT'S PATENT HOLLOW LATHE DOGS, and his Machinist Clamps of both Iron and Steel.
1 set of 8 dogs, from ⅜ to 2 inch, $6·50.



His expanding Mandril is a first class tool, which has long been needed by every Machinist.
Send for latest circular.
C. W. LE COUNT, South Norwalk, Conn.

## STEEL CASTINGS

TO PATTERN; tensile strength equal to wrought iron; will rivet over, bend, or case harden. Heavy work at low prices. PHILIP S. JUSTICE,
14 North 5 st., Phila.; 42 Cliff st., New York.

1832. SCHENCK'S PATENT. 1871.
## WOODWORTH PLANERS

And Re-Sawing Machines, Wood and Iron Working Machinery, Engines, Boilers, etc. JOHN B. SCHENCK'S SONS, Matteawan, N. Y. and 118 Liberty st., New York.

WOOD-WORKING MACHINERY GENERALLY. Specialties, Woodworth Planers and Richardson's Patent Improved Tenon Machines. Nos. 24 and 26 Central, corner Union st., Worcester, Mass.
WITHERBY RUGG, & RICHARDSON.

## Milling Machines.

STANDARD, UNIVERSAL, INDEX AND PLAIN, in every variety, of unequalled design and first class workmanship. Send for illustrated catalogue to the BRAINARD MILLING MACHINE COMPANY, 80 Milk Street, Boston. Works at Hyde Park.

RICHARDSON, MERIAM & CO.
Manufacturers of the latest improved Patent Daniels' and Woodworth Planing Machines, Matching, Sash and molding, Tenoning, Mortising, Boring, Shaping, Vertical, and Circular Re-sawing Machines, Saw Mills, Saw Arbors, Scrol. Saws, Railway, Cut-off, and Rip-saw Machines, Spoke and Wood Turning Lathes, and various other kinds of Wood-working Machinery. Catalogues and price lists sent on application. Manufactory, Worcester, Mass. Warehouse, 107 Liberty st. New York. 17 1

SHINGLE AND BARREL MACHINERY.—Improved Law's Patent Shingle and Heading Machine, simplest and best in use. Also, Shingle Heading and Stave Jointers, Stave Equalizers, Heading Planers Turners, etc. Address TREVOR & Co., Lockport, N. Y.

**STEAM PUMPS** WRIGHT'S Bucket Plungers are the best. Send for circular. Valley Machine Co., Easthampton, Mass.

## NEW YORK STENCIL WORKS,

**87 NASSAU ST., NEW YORK.**
Stencils of all kinds; Brass Labels for Manufacturers; Steel Stamps and Dies, and Stencil materials. Terms reasonable, and good work guaranteed.

**MACHINERY,** NEW and 2d-HAND.—Send for Circular. CHAS. PLACE & CO., 60 Vesey st., New York.

## *Andrew's Patents.*

**Noiseless, Friction Grooved, or Geared Hoisters, suited to every want.**
**Safety Store Elevators. Prevent Accident, if Rope, Belt, and Engine break.**
**Smoke-Burning Safety Boilers.**
**Oscillating Engines, Double and Single, 1-2 to 100-Horse power.**
**Centrifugal Pumps, 100 to 100,000 Gallons per Minute, Best Pumps in the World, pass Mud, Sand, Gravel, Coal, Grain, etc., without Injury.**
**All Light, Simple, Durable, and Economical. Send for Circulars.**
WM. D. ANDREWS & BRO.,
414 Water street, New York.

BURDON IRON WORKS.—Manufacturers of Pumping Engines for Water Works, High and low Pressure Engines, Portable Engines and Boilers of all kinds, Sugar Mills, Screw, Lever, Drop, and Hydraulic Presses, Machinery in general. HUBBARD & WHITTAKER, 10 Front St., Brooklyn, N. Y.

RISDON'S IMPROVED
## Turbine Water Wheel



Is Cheap, simple, strong and durable: upon a test has yielded over 84 per cent at full gate, and over 76 per cent at seven-eighths gate.
Send for circular to
T. R. RISDON & CO.,
Mount Holly, New Jersey.

WOOD WORKING MACHINERY—Specialties.—Freizing Machines, Shaping Machines, Low Price Band Saws, Oval Lathes, Glue Benches, Wood Turning Lathes, &c. HOPE MACHINE CO., 181 & 183 West Second St., Cincinnati, Ohio.

**Circular Slide Valve.**—To Railroad Managers and Other Users of Steam Power. I will guarantee an addition to the working power of any locomotive or slide valve engine, of one third to one half, at very small cost and no increase of running expenses. Tests desired everywhere. Circulars free. J. F. TALLANT, Burlington, Ia.

T. R. BAILEY & VAIL, Lockport, N. Y., Manufacturers of Gauge Lathes, Chair Machinery, Stave and Shingle Machines, Engine Lathes, Key Seat Cutting Machines, Upright Drills, &c. &c.

T. SHAW'S HYDRAULIC DISC, to sustain end thrust of heavy leader revolving Shaft. Ridge av. & Wood st., Philadelphia, Pa.

**SCHENCK'S WATER PROOF SHIPPING TAGS** 90 ANN ST P.O. BOX 2564 NEW YORK

**Capron's Improved Turbine WATER-WHEEL.**
POLISHED & DETACHABLE BUCKETS
CHEAPEST & BEST WHEEL MADE.
CAPRON WATER WHEEL CO. HUDSON N.Y.

THE ONLY MODE of Disposing of Patents: See Patent Right Gazette. Address U. S. Patent Right Association, 94 Chambers Street, P. O. Box 4544, New York.

BUY BARBER'S BIT BRACE.

## *P. BLAISDELL & Co.,*

MANUFACTURERS OF FIRST CLASS **MACHINISTS' TOOLS.** Send for Circulars.
Jackson st., Worcester, Mass.

MODELS FOR THE PATENT OFFICE, and experimental machinery of all kinds. HOLSKE MACHINE CO., 279 Cherry St., New York, near Jefferson St. A special shop for Patent Models. Many years experience. Refer to Scientific American Office.

## *To Electro-Platers.*

BATTERIES, CHEMICALS, AND MATERIALS, in sets or single, with books of instruction, manufactured and sold by THOMAS HALL, Manufacturing Electrician, 19 Bromfield street, Boston, Mass. Illustrated catalogue sent free on application.

WOODBURY'S PATENT
## *Planing and Matching*

and Molding Machines, Gray & Wood's Planers, Self-oiling Saw Arbors, and other wood working machinery.
S. A. WOODS, 91 Liberty street, N. Y.;
Send for Circulars. 107 Sudbury street, Boston

**OTIS'** SAFETY HOISTING **Machinery.**
**OTIS, BROS. & CO.**
**No. 348 BROADWAY, NEW YORK.**

© 1872 SCIENTIFIC AMERICAN, INC

# Advertisements.

*dvertisements will be admitted on this page at the rate of* **$1·00** *per line for each insertion. Engravings may head advertisements at the same rate per line, by measurement, as the letter-press.*

**ASPHALTE ROOFING FELT.**

A WELL tested article of good thickness and durability, suitable for steep or flat roofs; can be applied by an ordinary mechanic or handy laborer. Send for circular and samples to E. H. MARTIN, 70 Maiden Lane and 9 Liberty Street, N. Y.,

FOR SALE—The Linus Yale Lock Factory. Machinery and Water power in complete order, adapted to the manufacture of Locks, or a large variety of other articles. Address HARRIS BRO'S, Newport, N.Y.

EMERSON SAW WORKS
FORD & Co
BEAVER
FALLS
PA.
SEND FOR CIRCULAR
EVERY DESCRIPTION
IMPROVED PATENT INSERTED TOOTH SAWS
MADE UNDER
HIS SPECIAL SUPERVISION

SAM'L S. FISHER, WM. H. FISHER, } Cincinnati.
SAM'L S. FISHER, SAM'L A. DUNCAN, } New York.

## FISHER & DUNCAN,

**Counsellors at Law in Patent Cases**
(Including Interference and Extension Cases in the United States Courts).
OFFICES: 8 WEST THIRD ST., Cincinnati. 239 BROADWAY, New York.

LIGHT CASTINGS made to order by THOMAS B. HARKINS, Bristol, Pa.

## Texas Commissioner of Immigration

FOR THE
**Northern States of the U.S. of America.**
**29 BROADWAY, NEW YORK.**

The undersigned is the official Agent of Texas, appointed by the Texas State Bureau of Immigration, to represent Texas to the people of the Northern States, as the most inviting field on the continent, for the poor man, the man of enterprise, the skilled laborer, and the capitalist. Two great trunk roads are now building through Texas to the Pacific. One via the city of Austin to San Blas, with branch to the city of Mexico, and one to San Diego. The undersigned is not interested in he sale of land; but is prepared, by letter and printed matter, to answer all inquiries in reference to Texas, from parties seeking new and better homes.
W. H. PARSONS,
Texas Com. of Immigration.

AGENCY WANTED in Boston, by an active young man of good address—good mercantile business knowledge, has some capital, can furnish **first class** references, and bondsmen if necessary—understands machinery. Address DAVIS, P. O. Box 3567, Boston, Mass.

| | | |
|---|---|---|
| Crescent | St. | WALTHAM WATCHES are the best Railroad Time-keepers. |
| Crescent | St. | WALTHAM WATCHES are used on all roads which "run on time." |
| Crescent | St. | WALTHAM WATCHES are indispensable to Engineers and Conductors. |
| Crescent | St. | WALTHAM WATCHES should be worn by all travelers. |
| Crescent | St. | WALTHAM WATCHES are not affected by Heat or Cold. |
| Crescent | St. | WALTHAM WATCHES have extra tight-fitting cases. |
| Crescent | St. | WALTHAM WATCHES are the cheapest as well as the most desirable. |
| Crescent | St. | WALTHAM WATCHES are described in full in our Price List. |

Send for a copy, and mention the SCIENTIFIC AMERICAN. We send them by express to any place, with privilege to examine before paying.

**Howard & Co.,**
**No. 865 Broadway, New York.**



FASTEN YOUR WINDOWS DOWN OR UP with the REISINGER SASH LOCK AND SUPPORT. No spring, no mutilation of sash; cheap, durable, easily applied—holds sash at any place desired, and automatically locks the window when down. Send for circular. On enclosing 25 cents, a circular and a japanned lock will be mailed to any address, post-paid. The trade supplied. Agents wanted everywhere.
H. C. DEMMING,
*Treas.*,
Harrisburg, Pa.

IRON PLANERS, ENGINE LATHES, Drills, and other Machinists' Tools, of superior quality, on hand, and finishing. For sale low. For Description and Price address NEW HAVEN MANUFACTURING CO., New Haven, Conn.

HAND SAW MILL.—Do work of 3 men. Rip 3 inch lumber with ease. Thousands in use. Agents wanted everywhere. HILLS & HOAG, 32 Courtlandt Street New York.

**PYROMETERS,** For Ovens, Boiler flues, Hot-blast pipes, Oil stills, Super-Heated Steam, &c.
Address HENRY W. BULKLEY,
98 Liberty Street, New York.

## A. S. CAMERON & CO.,



**ENGINEERS,**
Works, foot of East 23d street, New York city.

**Steam Pumps,**
Adapted to every possible duty.
Send for a Price List.

## NILES TOOL WORKS,

**CINCINNATI, OHIO.**

Gary's Universal Radial Drill.

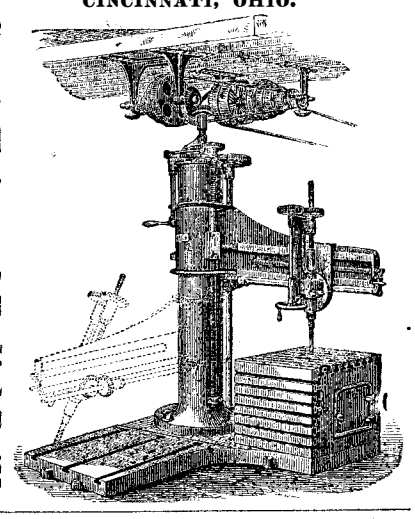

ALL interested in the TRANSPORTATION OF HEAVY MATERIAL ON COMMON ROADS should see AVELING & PORTER'S celebrated English manufactured ROAD LOCOMOTIVES, which are constantly at work near to New York and other places in the United States with the GREATEST SUCCESS. Apply
W. C. OASTLER,
43 Exchange Place, New York.

SEND FOR A DESCRIPTIVE CIRCULAR of the cheapest and best Rotary Hand Corn Sheller in the world. Address
EUGENE SNYDER,
Treasurer Harrisburg, Pa., Family Corn Sheller Co.



Three-Ply Roofing. Two-Ply Sheathing. Send for Samples and Circular.
MICA ROOFING COMPANY, 73 Maiden Lane, N. Y.

**BOLT FORGING MACHINES.**
Can be seen in operation at manufactory. To Capitalist, these machines offer two ways to make money.
JOHN R. ABBE, Patentee,
39 Charles Street, Providence, R. I.

## MACHINISTS.

Illustrated Catalogue and Price List of all kinds of small Tools and Materials sent free to any address. GOODNOW & WIGHTMAN, 23 Cornhill Boston, Mass.

## *THE HEALD & SISCO*

HORIZONTAL PUMP,



WITH PLUNGER & BED FRAME.

**PATENT CENTRIFUGAL PUMPS,**
**VERTICAL AND HORIZONTAL,**

ARE USED ALL OVER THE UNITED STATES and the Canadas, and also in Great Britain. Send for our new Illustrated Pamphlet, containing hundreds of references to Tanners, Paper-makers, Contractors, Brick-makers, Distillers, etc., with 19 pages of the strongest possible testimony. (Nine pages of references.)
Address HEALD, SISCO & CO., Baldwinsville, N.Y.
☞ The H. & S. Pump took the First Premium at the recent Louisiana State Fair, over the most celebrated Centrifugal Pumps known in the United States, including one from New York. As a Wrecking-pump, and as an Irrigator, it is unrivalled, both for cheapness and efficiency. It makes a splendid Fire Pump.

## MORRIS, TASKER & CO.,

MANUFACTURERS OF
**American Charcoal Iron Boiler Tubes.**
**Wrought-Iron Tubes and Fittings,**
FOR GAS, STEAM, WATER AND OIL.
☞ Steam and Gas Fitters' Supplies, Machinery for Coal Gas Works, &c. &c.
**NO. 15 GOLD ST., NEW YORK.**

TODD & RAFFERTY, Manufacturers of Steam Engines, Boilers, Flax, Hemp, Tow Bagging, Rope and Oakum Machinery. Steam Pumps and Governors always on hand. Also Agents for the New Haven Manufacturing Co.'s Machinists' Tools. ☞ We invite especial attention to our new, improved, Portable Steam Engines. Warerooms, 10 Barclay st. Works Paterson, N. J

## *American Saw Co.*



**No. 1 Ferry Street, corner Gold Street, New York,**
MANUFACTURERS OF
**Patent Movable-Toothed**
**CIRCULAR SAWS,**
**Patent Perforated**
**Circular, Mill,**
AND
**Cross-cut Saws.**
☞ Send for Descriptive Pamphlet.

## RUMPFF & LUTZ,

**42 BEAVER ST., NEW YORK,**
AGENTS FOR THE UNITED STATES FOR
FENNER & VERSMANN'S
**Anthrazen Patent.**

## VENEERS

AND
HARDWOOD LUMBER.
BUTTERNUT, FRENCH AND AMERICAN WALNUT, ASH AND CHERRY BURLS; HUNGARIAN ASH, BIRDSEYE & BLISTER MAPLE, etc. etc.
☞ Mahogany, Rosewood, Cedar, etc., in boards, plank, and logs. Large and choice stock at low prices.
**GEORGE W. READ & CO.,**
170 & 172 Center St., New York.
Mill and Yard, 186 to 200 Lewis, bet. 5th & 6th Sts. E.R.
Send for Catalogues and Price List

## MICROSCOPES,

For Scientific Investigations and the Entertainment of the Family Circle. Illustrated Price List sent free on application. McALLISTER, Optician, 49 Nassau St., N.Y.

IRON STEAMSHIP BUILDERS.
## NEAFIE & LEVY,
***PENN WORKS,***
MARINE ENGINES, BOILERS, AND BUILDERS OF COMPOUND ENGINES,
PHILADELPHIA, PA.

## The Union Stone Co.,

Patentees and Manufacturers of
EMERY WHEELS & EMERY BLOCKS,
In Size and Form to Suit various Mechanical Uses;
**GRINDERS, SAW GUMMERS, DIAMOND TOOLS, and WOOD'S PATENT KNIFE-GRINDER,**
**For Planing, Paper Cutting, Leather Splitting, and other Long Knives.**
OFFICE, 29 KILBY STREET, Boston, Mass.
BRANCH OFFICES: 93 Liberty Street, New York. 502 Commerce Street, Philadelphia.
☞ Send for circular.

SCHLENKER'S PATENT
**BOLT CUTTER**
NEW INVENTION. ADDRESS,
HOWARD IRON WORKS, BUFFALO, N.Y.

## Steam Super-Heaters.

For dry steam and Saving fuel.
Address HENRY W. BULKLEY, ENGINEER,
98 Liberty Street, New York.

## Diamonds and Carbon

Shaped or crude, furnished and set for boring rocks, dressing mill burs, emery wheels, grindstones, hardened steel and paper calender rollers, and for sawing, turning or working stone. Also, GLAZIERS' DIAMONDS.
JOHN DICKINSON, 64 Nassau Street, New York.

## Diamond Pointed STEAM DRILLS.

THE adoption of new and improved applications to the celebrated Leschot's patent, have made these drills more fully adaptable to every variety of ROCK DRILLING. Their unequalled efficiency and economy are acknowledged, both in this country and Europe. The Drills are built of various sizes and patterns; WITH AND WITHOUT BOILERS, and bore at a uniform rate, of THREE TO FIVE INCHES PER MINUTE in hard rock. They are adapted to CHANNELLING GADDING, SHAFTING, TUNNELLING, and open cut work; also, to DEEP BORING FOR TESTING THE VALUE OF MINES AND QUARRIES. TEST CORES taken out, showing the character of mines at any depth. Used either with steam or compressed air. Simple and durable in construction. Never need sharpening. Manufactured by
**THE AMERICAN DIAMOND DRILL CO.,**
**No. 61 Liberty St., New York**

## *Working Models*

And Experimental Machinery, Metal, or Wood, made to order by J. F. WERNER, 62 Center st., N. Y.

## LUBRICATORS.

DREYFUS' celebrated Self-acting Oilers, for all sorts of Machinery and Shafting, are reliable in all seasons, saving 75—95 per cent. The Self-acting Lubricator for Cylinders is now adopted by over 80 R. R. in the U.S., and by hundreds of stationary engines. Send for a circular to NATHAN & DREYFUS, 108 Liberty St., N.Y

PAT. SOLID EMERY WHEELS AND OIL STONES, for Brass and Iron Work, Saw Mills, and Edge Tools. Northampton Emery Wheel Co. Leeds, Mass.




FIRST PREMIUM (MEDAL) AWARDED IN 1870 AND IN 1871. Endorsed by Certificate from AMERICAN INSTITUTE as **"The Best Article in the Market."**
Also, manufacturer of **Asbestos Boiler Felting,** Roofing and Sheathing Felts, Acid, Water and Fire Proof Compositions, Boiler Scale Preventive, and dealer in ASBESTOS ASPHALTUM and GENERAL ROOFING MATERIALS.
☞ Descriptive Pamphlets, Price Lists, &c., by mail.
*Established in 1858.* **H. W. JOHNS,**
**78 William St., New York**

## Trade-Mark Patents.

MUNN & CO. desire to call the attention of manufacturers and business men generally, to the importance of the law of patents, as applied to trade-marks for business purposes.
Any person, firm, or corporation, domiciled in the United States, or in any foreign country affording similar privileges to citizens of the United States, can obtain the right to the exclusive use, for THIRTY YEARS, of any TRADE-MARK, consisting of any new figure, or design, or any new word, or new combination of words, letters, or figures upon their manufactures.
This protection extends to trade-marks already in use or any length of time, or about to be adopted.
Full information on this important subject can be obtained by addressing
**MUNN & CO.**
**37 Park Row, New York.**

☞ T. V. Carpenter, Advertising Agent. Address hereafter, Box 773, New York city.

PATENT SAFETY
## Steam Engine Governors and Water Gauges.

AUG. P. BROWN, Manf'r, 59 Lewis Street, New York.

## Flouring Mill near St. Louis, Mo., FOR SALE.

A FIRST CLASS **Merchant Flouring Mill** with four run-of-burrs—capable of turning out over 400 barrels of flour in 24 hours.
This Mill is situated in **Belleville, Ills.,** a rapidly growing city—now one of the **suburbs of Saint Louis,** with which it is connected by three Railroads with trains running hourly between.
The surrounding country produces, in an eminent degree, the quality of wheat which has made the **St. Louis brands of flour so famous.** Besides enjoying the advantages of St Louis proper, such as **facilities for shipment; access to the Elevators; ample supply of labor; a ready market**—the place has some, peculiarly its own: **a local supply of excellent wheat at lower prices than current at St. Louis; cheaper coal of the best quality; lesser taxes and cheaper living.**
**The wheat prospects of this section are unsurpassed** this year, greatly more favorable than those reported from Central and Western Missouri. **To the practical man, this feature will commend itself.**
**The Milling business in this neighborhood has been most flourishing the past season, and promises well for the one now about opening.**
St. Louis has obtained such a commanding position in the flour trade, which is still growing steadily, that the business has become one of the first magnitude, and very lucrative.
**Liberal terms can be given.**
This is a chance seldom offered, and to a practical and esponsible party cannot fail to prove an excellent investment. Address
**IMBS, MEYER & FUSZ,** } for Mill
**St. Louis, Mo.** } owner.

A LARGE ASSORTMENT OF
## *SPY GLASSES.*

Write for Catalogue. W. T. McALLISTER,
728 Chestnut Street, Philadelphia, Pa.

## *L. W. Pond---New Tools.*

**EXTRA HEAVY AND IMPROVED PATTERNS.**
LATHES, PLANERS, DRILLS, of all sizes; Vertical Boring Mills, ten feet swing, and under. Milling Machines, Gear and Bolt Cutters; Hand Punches and Shears for Iron.
Office and Warerooms, 98 Liberty st., New York; Works at Worcester, Mass.
A. C. STEBBINS, New York, Agent.

## PORTLAND CEMENT,

OF the well known manufacture of John Bazley White & Brothers, London, for sale by JAMES BRAND, 55 Cliff St., N. Y.

THE TANITE CO.'S GOODS are kept in Stock, and sold at *Factory Prices*, by CHAMPLIN & ROGERS, 214½ *East Madison St., Chicago*, who are also Exclusive Western Agents for the New York Tap and Die Co.'s goods, and Dealers in Railway, Mill, and Machinists' Supplies.

MACHINERY. S. N. HARTWELL, Engineer, Manufacturers' General Agent, 93 Liberty Street, New York.

STANDARD AMERICAN BILLIARD TABLES
NEW DESIGN

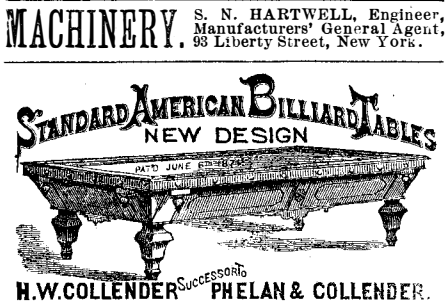

H. W. COLLENDER Successors PHELAN & COLLENDER.

## PATENT COLD ROLLED SHAFTING.

The fact that this Shafting has 75 per cent greater strength, a finer finish, and is truer to gage, than any other in use, renders it undoubtedly the most economical. We are also the sole manufacturers of the CELEBRATED COLLINS PAT. COUPLING, and furnish Pulleys, Hangers, etc., of the most approved styles. Price lists mailed on application to JONES & LAUGHLINS,
120 Water street, Pittsburgh, Pa.
☞ Stocks of this Shafting in store and for sale by FULLER, DANA & FITZ, Boston, Mass.
GEO. PLACE & CO., 126 Chambers street, N. Y.

Damper Reg. Pat. Gage Cocks. Water Feed Reg's.

Send for circulars. MURRILL & KEIZER, Balt., Md.

LEFFEL IMPROVED DOUBLE TURBINE
## WATER WHEEL.
6000 IN USE.
NEW WHEEL BOOK 152 PAGES, FOR 1872
**SENT FREE**
JAMES LEFFEL & CO. SPRINGFIELD, O.
& 109 LIBERTY ST. NEW YORK CITY.

## *WIRE ROPE.*

JOHN A. ROEBLING'S SONS,
MANUFACTURERS, TRENTON, N. J.
FOR Inclined Planes, Standing Ship Rigging Bridges, Ferries, Stays, or Guys on Derricks & Cranes, Tiller Ropes, Sash Cords of Copper and Iron, Lightning Conductors of Copper. Special attention given to hoisting rope of all kinds for Mines and Elevators. Apply for circular, giving price and other information. Send for pamphlet on Transmission of Power by Wire Ropes. A large stock constantly on hand at New York Warehouse No. 117 Liberty street.

## REYNOLDS & CO.

MANUFACTURE
***Screws & Bolts***
For Machinery of every variety.
ALSO
**Bridge and Roof Bolts.**
**STEEL & IRON SET SCREWS**
A specialty. Also, Small Articles for Patentees, in great numbers, at No. 145 East st., New Haven Conn

THE "Scientific American" is printed with CHAS. ENEU JOHNSON & CO.'S INK. Tenth and Lombard sts. Philadelphia and 59 Gold st. New York.

© 1872 SCIENTIFIC AMERICAN, INC